

paper 2

by Untoro Nugroho

Submission date: 05-Apr-2020 10:55AM (UTC+0700)

Submission ID: 1289809662

File name: ggering_Factor_of_Landslide_Phenomenon_in_Karangobar_untoro.pdf (415.37K)

Word count: 3240

Character count: 17263

The Triggering Factor of Landslide Phenomenon in Karangobar, Banjarnegara, Indonesia

Nugroho, U.¹, Kusumawardani, R.¹, Lashari¹

Civil Engineering Department, Universitas Negeri Semarang
Jalan Taman Siswa, Sekaran, Gunung Pati, Semarang, Indonesia
Email : untoro.nugroho@mail.unnes.ac.id

ABSTRACT— Banjarnegara district is dominated by hills which have the potential for landslide disaster. Landslide phenomenon occurred many times in the Jemblung village, Karangobar District, Banjarnegara which took many casualties such as loss of sizeable human lives and facilities. Landslide analysis was conducted to examine the factors which caused landslides by checking the supporting data such as topographic maps, geological maps, and rainfall data in Banjarnegara regency. The study was literature review discussing about landslides in Karangobar. From this analysis, disaster mitigation can be conducted by using Regulation of the Minister of Public Works No. 22 / PRT / M / 2007 were utilized as further analyses. The level of hazard in the Jemblung village area, Sampang, Banjarnegara was revealed in this paper. This study showed that the main factor causing landslides in Karangobar especially the village of Sampang was the topography of Sampang village which is located on the steep slopes and rock types which are easily weathered, and high daily rainfall before the landslide. The analyses of the level of hazard revealed the same results that Jemblung was categorized as high landslide hazard level area. Mitigation effort which could be conducted was by giving socialization to the community on appropriate land management, preventing any additional slope load as well as an effort to flatten the existing cracks.

Keywords— landslide, topography, rainfall, geologic of soil

1. INTRODUCTION

Landslides are one of the disasters which often occur in Indonesia. The Indonesian Department of Disaster Mitigation (BNPB) recorded that during the four years (2010-2014), 1500 landslides occurred in Indonesia. Therefore, this case requires further investigation to minimize the impacts. Landslides can cause various problems (type, affecting factors, time and the scene) both before, during and after the landslides [1], [6], [8]. Natural factors which become the cause of the mass movement are the high rainfall, soil conditions, rocks, vegetation and seismic factors, as well as, humans' activities that could trigger landslides. Banjarnegara was one of the districts which experienced quite serious landslides in 2014. The damages were 88 casualties, severely damaged / buried 40 units of house, 1 unit mosque, 1 Km land – covered river, 8 Ha damaged rice field, garden crops 5 ha, 5 cows, 30 goats, 500 chickens and ducks [2]. Landslides could have been prevented if the surrounding community were more responsive to disasters and stop destroying the environment. One of the ways to mitigate landslides was by knowing the location of the land in which landslide frequently occur and its hazard level [3]. Banjarnegara is a regency which has the potential of medium to high mass movement. As a consequence, this study of mass movement is necessary. This study was carried out by reviewing literature on landslides which occurred in Banjarnegara. The analysis of landslides by using Permen (Regulation of Indonesian of Public Work Ministry) was conducted to examine the factors which caused landslides by checking the supporting data such as topographic maps, geological maps, and rainfall data in Banjarnegara regency. The results of this study provided advice on mitigation efforts which can be conducted to avoid the landslide and to minimize its losses. The location of the study was in District Karangobar,

Banjarnegara regency, Central Java. Location of the study were at coordinates 109 ° 43 '15.3912 "East and 7 ° 16' 52.5828" South. According to the vulnerability of mass movement zone map 2014 published by the Center for Volcanology and Disaster Mitigation Geology (CVDMG), the location of the study is on the red zone (Fig. 1). Therefore, the potential of mass movement in this region is high


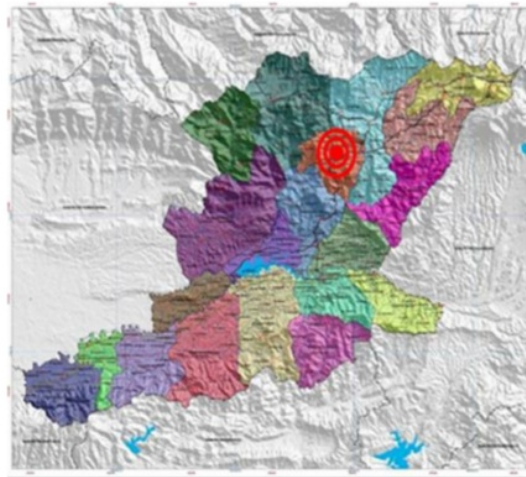


Figure 1: The Map of Study Site

2. HISTORY OF LANDSLIDES

The landslide caused the loss of life. Out of 308 people living in Jemblung village, 200 people survived. However, 108 people were buried by landslide. Area of landslide was estimated that approximately 17 Ha was buried by

occurs. Rock cracks lead to landslide whose volume becomes greater. Along the fault lines, it does not only occur on one point. Based on regional geological map in the Karangobar which described in Fig. 4, most of the Karangobar area consists of renggojembangan volcanic rocks and rambatan rock formations. Those rocks are easily weathered rocks and not very solid. The type of the existing geological condition is composed of lava and alluvium sediment from volcano eruption material, lava flows and breccia, with bedrock in the form agglomerates with andesite, hornblende andesite lava and tuff.

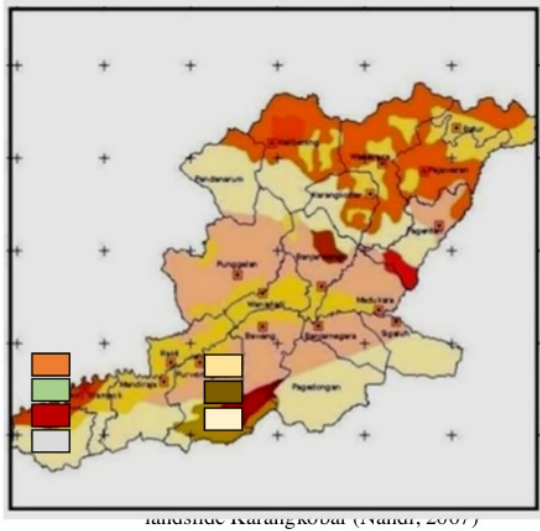

The effect of rain fall on landslide phenomenon in Karangobar indicated that it also the triggering factor. From the Fig. 5 revealed that the excessive amount of water increases the load of a slope, making the slope unstable. Rain with a high intensity, eg, 50 mm and long-lasting (more than 6 hours) potentially causes landslide, because the water saturates the soil, thereby increasing the weight of the ground [4]. According BNPB [2], long lasting heavy rainfall at the time and prior to the mass movement is one of the factors triggering landslides. Based on daily rainfall data published by BMKG, daily rainfall before the landslide in Karangobar on December 12, 2014 was 204 mm / day.

Widagdo [11] states that, the landslide area which was the object of this study is located on North Serayu mountainous area. This slope have the declivity leading to the north-northwest (Figure 2). From Fig. 6, it described that the area of the study is located at an altitude between 900-1100 m above sea level. The peak area is on the southeast slope with an altitude of 1100 meters above sea level, which is a part from the slope of the Sampang mountainous area.

rock. In the dry season, the flow pattern does not stream water / intermittent pattern.

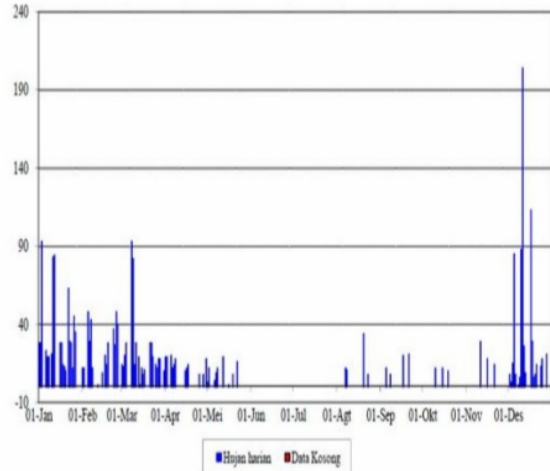


Figure 5: Daily rainfall in Karangobar (PSDA, 2014)

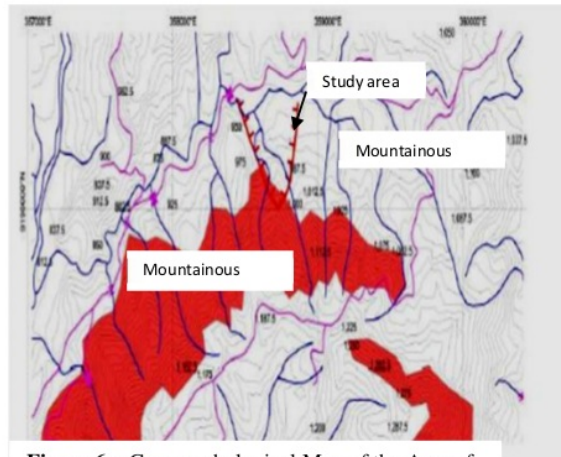


Figure 6 : Geomorphological Map of the Area of the Study (Widagdo, 2015)

With the height of the area is above 500 meters, the area of the study can be categorized as mountainous area. The slope in the middle area to the north - southwest has relatively steep height between 40 to 60 degrees. The morphology of this steep slope expands from a height approximately 900 m to the top of 1100 m. Therefore, height difference of erosional escarpment / the structure of this area is 300 m[10]. Based on the classification of relief by van Zuidam (1983 in [11]), this area is included in the steep slope area. In Figure 7, the area is described as a morphological part of a mountain with steep slopes.

The flow pattern that develops on steep slope is the pattern of parallel. The stadia of the river is at an early stage. The steep slope is composed of epiclastic breccia

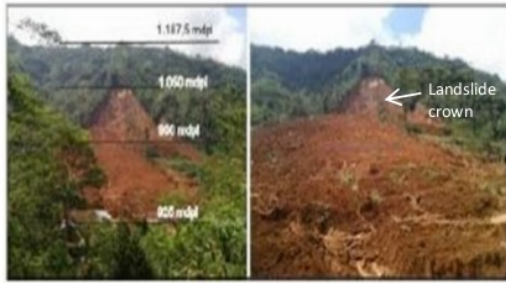


Figure 7 :The Morphology of the Landslide area in the Area of the Study (Widagdo, 2015)

According Widagdo [12], outside the landslide-prone area Sampang village, the slope increases between 20-30 degrees (Figure 7). This morphology expands from an altitude of 800-900 m in the southern part of 900-1100 m in the east. Therefore, the height difference is only 100-1m area. This area could be identified as undulating hilly areas with relative rocks are Pleistocene and the environment of breccia formation is on ground loop [9].

3.2 Analysis of landslide potential

Method of analysis using Indonesia Ministry of Public Work Regulation no. 22 / PRT / M / 2007. The Guidelines of Spatial Landslide Prone Areas are arranged to complete the norms, standards, procedures, and manual in the spatial field in the form of guidelines, technical guidelines, implementation guidelines as well as technical guidelines in the spatial field. One of these guidelines are the guidelines for the preparation and a review of the provincial spatial plan, districts and urban areas contained in Decree of the Minister of Settlement and Regional Infrastructure No. 327 / KPTS / M / 2002 regarding the Determination of Six Guidelines on Spatial Planning Division. With reference to these guidelines, the possibility of the occurrence of landslides may be anticipated, prevented or minimized. In addition, losses of lives as well as wealth caused by landslide can also be minimized through spatial planning of landslides prone areas. Therefore, the consistency of implementation of space utilization with the spatial plan of the area can be maintained.

Landslide prone areas are divided based on the characters and their natural physical condition. Consequently, each zone has different in the Landslide prone areas are divided based on the characters and their natural physical condition. Consequently, each zone has different in the determination of the structure of space and spatial patterns and the type and intensity of activity allowed, allowed with the requirements, or banning. Landslide prone zone is the area / region which is prone to landslide with the terrain condition and geological condition which is very sensitive to outside interference, both natural and human activities as the mass movement triggering factors. As a consequence, the landslide can potentially occur. Based on its hydrogeomorphology, an area can be categorized into three types of zone (as illustrated in Figure 8)

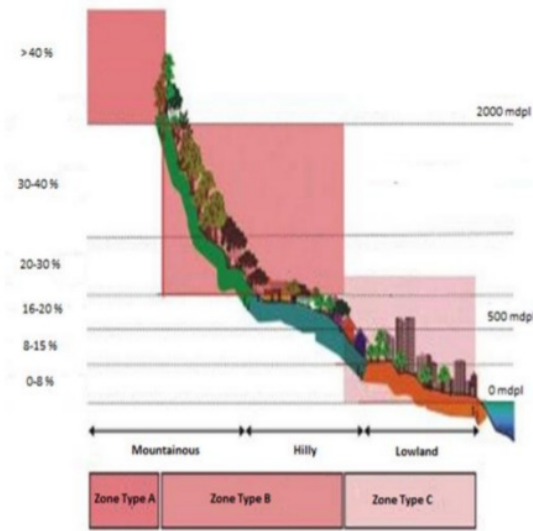


Figure 8 :Typology of potential landslide zone based on the results of the hydrogeomorphology study

Table 2: The Natural Physical Aspect Criteria Kriteria Aspek Fisik Alami

No	Indicator	The Indicator Weight (%)	Vulnerability Level Sensitivity	Verifier	Research Weight	Weight Value Weighted Level of landslide vulnerability
1	Slope angle	30%	High	The slope angle is the approximately 36 – 40%	3	0.9
2	Soil condition	15%	Medium	The slope is composed of expanding clay, but there is not contrastive field with the rock beneath.	2	0.3
3	Slope composing rock	20%	Medium	The slope is composed of rocks and there is a vault structure but the rock layer is not tilted to the outside of the slope.	2	0.4
4	rainfall	15%	high	The rainfall reaches 70mm/hour or 100 mm/day, the yearly rainfall reachers 2500 mm	3	0.6
6	seismicity	3%	Medium		2	0.06
7	vegetation	10%	low		1	0.01

Table 2: The Natural Physical Aspect Criteria Kriteria Aspek Fisik Alami

No	Indicator	The Indicator Weight (%)	Vulnerability Level Sensitivity	Verifier	Research Weight	Weight Value Weighted Level of landslide vulnerability
5	Slope waterworks	7%	medium	There is no water seepage or springs on the slopes or the contact area between impermeable rock with <i>permeable</i> soil layers The frequency of earthquakes is rare (1-2 times per year) Tap rooted plants with roots spreading like hazelnut, laban, dingsem, Minda, Venus, bungur, banyan, mahogany, renghas, teak, kosmbi, rosewood, trengguli, Tayuman, tamarind and Pilang	3	0.9
6	seismicity	3%	Medium		2	0.3
7	vegetation	10%	low		2	0.4
Total						2.41

Table 3: Human Activity Aspect Criteria

No.	Indicator	The Indicator Weight (%)	Sensitivity level of vulnerability	Verifier	The weight of research	Weight Value Weighted Level of landslide vulnerability
1	Planting pattern	10%	Medium	The slope is planted with appropriate cropping patterns and very intensive, for example, tap root plant (perennials tree)	0.2	0.2
2	Excavation and Cutting Slope	20%	Low	Not digging / cutting slopes, but the intensity is low, pay attention to the structure of soil and rock, and there is a calculation of slope stability analysis	0.2	0.2
3	Pool printing	10%	low	There is no pool printing	0.2	0.2
4	Drainage	10%	low	The drainage is sufficient and there are efforts to maintain the drainage system	1	0.1
5	Construction development	20%	low	The construction development has been conducted. The load is still low and has not exceeded the carrying capacity of the soil, or there is not construction development.	1	0.2
6	Population density	20%	low	The construction development has been conducted. The load is still low and has not exceeded the carrying capacity of the soil, or there is not construction development.	3	0.6
7	mitigation effort	10%	low	There is a well organized and coordinated natural disaster mitigation effort by the government or the public,	1	0.1
Total						1.6

The criteria for vulnerability level of potential landslide Zone Type B are based on the natural physical aspects are as follows: (1) Type B Potential Landslide Zone with high vulnerability level: the total value is 2.40 - 3.00; (2) Type B Potential Landslide Zone with medium vulnerability level: the total value is 1.70 to 2.39; (3) Type B Potential Landslide Zone with low vulnerability level: the total value is 1.00 to 1.69. The value of

assessment of the vulnerability of Type B potential landslide zone based on the natural physical aspect is 2:41 which is included into Type B Potential Landslide Zone with high vulnerability level. While the value of assessment of the vulnerability of Type B potential landslide zone based on human activity is 1.6 which is included into Type B Potential Landslide Zone with high vulnerability level.

Table 4: Classification of zones Potential Landslide types based on the level of vulnerability Based on Table 2

No	Type of zone	The Vulnerability Level Criteria (Natural Physical Aspect)	The Risk Level Criteria (Human Aspect)	Vulnerability Level Classification
1	A The slope of the mountain / the mountain, The slope of the hill / hills, and the river bank with a slope angle of over 40%	High	High	High class
			Moderate	
			Low	
		Moderate	High	Moderate class
			Moderate	
			Low	
2	B The foot of the mountain / the mountain, foothills / hills and the river bank with a slope angle between 21% to 40%	High	High	High class
			Moderate	
			Low	
		Moderate	High	Moderate class
			Moderate	
			Low	
3	C Upland areas, lowlands, the riverbanks and the river valley with slope angle 0% to 20%	High	High	High class
			Moderate	
			Low	
		Moderate	High	Moderate class
			Moderate	
			Low	
		High	Low class	
	Moderate			
	Low			

4. DISCUSSION

Based on the analysis of the factors causing the landslide in Karangobar district, it can be concluded that the main cause of landslides Jemblung, Karangobar, Banjarnegara is the topography which is in the steep slopes and rock types which is easily weathered and excessive rain after the 204 mm / day prior to the occurrence of landslides. The analysis of Slope landslide susceptibility using the method of Minister of Public Work Regulation No. 22 / PRT / M / 2007. The analysis revealed that Jemblung had the high landslide susceptibility. Special concern about landslide disasters has paramount importance, given landslide area is located near the residential area. Mitigation efforts become one of the things that must be conducted, such as information dissemination to the community to cultivate land properly, good management of the drainage slope, so that the level of water saturation can be reduced, no slope excavation at the foot of the slopes. If there is a crack, the public can close the cracks with landfill to make it flat.

5. REFERENCES

- [1] Anbalagan, R. D Chakraborty. A Kohli., "Landslide Hazard Zonation (LHZ) On Messo-Scale Mapping For Systematic Town Planning In Mountainous Terrain", Journal Of Scientific & Industrial Research Vol.67, pp.486-497 2008.
- [2] BNPB, "Disaster Response Movement Land In District Sigaluh, District Pejawaran And Karang Kobar, Banjarnegara district Central Java province" Body National Disaster Management Public Works Department. Guidelines for Spatial Planning - Landslide Prone Region. Ministerial regulation Public Works PRT / M / 2007, 2014.
- [3] Davies, T and J. F. Shroder Jr, "Landslide Hazards, Risks, and Disasters", Edited by: Tim Davies and J. F. Shroder Jr. Elsevier Inc., ISBN: 978-0-12-6452-6, 2015
- [4] Effendi, Ahmad Danil, "Identifikasi Kejadian Longsor dan Penentuan Faktor- Faktor Utama Penyebabnya Di Kecamatan Babakan Madang Kabupaten Bogor", Departemen Manajemen Hutan Fakultas Kehutanan Institut Pertanian Bogor, 2008.
- [5] Hidayat, G.A., "Use of the Media Maket Lansekap Contour For Community Preparedness In Facing of Landslides", Universitas Negeri Semarang, 2015.

- 7
- [6] Jamaludin, Suhaimi, Bujang B.K., Huat, Husaini Omar, "Evaluation And Development Of Cut-Slope Assesment Systems For Peninsular Malaysia In Predicting Landslides In Granitic Formation", *Journal of Technology*, 44 (B) June 2006, 31-46, 2006.
- [7] Karnawati, D., Fathani, T. F., Andayani, B., P. W. Burton, Sudarno, I, "Strategic program for landslide disaster risk reduction: a lesson learned from Central Java, Indonesia", *WIT Transactions on State of the art in Science and Engineering*, Vol 53, 2011
- [8] Lagomarsino, D., Segono, S., Rosi, A., Rossi, G., Battistini, A., Catani, F., Casagli, N., "Quantitive comparison between two different methodologies to define rainfall thresholds for landslide forecasting", *Nat. Hazards Earth Syst. Sci.*, 15, 2413–2423, 2015
- [9] Martodjojo, S., "Evolusi Cekungan Bogor Jawa Barat", *Dissertation Doktor, ITB, Bandung*. 1984
- [10] Nandi, "Landslide Education", *Handout of Department Geografi, Universitas Negeri Semarang*, 2007
- [11] Nugroho, Fahrudin, Suwarsono, "Mapping Risk Index Mass Movement Imagery Using DEM SRTM and Geological Data Pejawaran, the District Banjarnegara. Detection Parameter of Geobiofisik and Dissemination Geographic Information System Utilization", *Center for Remote Sensing, LAPAN*, 2014.
- [12] Widagdo, Asmoro. Rachmad Setiadji. "Control Structure In Landslide In Karangobar Sampang-Regional District Banjarnegara, Central Java", *Universitas Jendeal Soedirman*, 2015.

paper 2

ORIGINALITY REPORT

16%

SIMILARITY INDEX

15%

INTERNET SOURCES

7%

PUBLICATIONS

%

STUDENT PAPERS

PRIMARY SOURCES

1	www.pontejournal.org Internet Source	8%
2	isnet.or.id Internet Source	1%
3	www.nat-hazards-earth-syst-sci.net Internet Source	1%
4	archive.org Internet Source	1%
5	ejournal.upi.edu Internet Source	1%
6	www.ijeast.com Internet Source	1%
7	scipub.org Internet Source	1%
8	B H Widayanti, A Yuniarman, S A P Lestari. "The landslide risk analysis based on human activity using Arc-GIS method", IOP Conference Series: Materials Science and Engineering,	<1%

2019

Publication

9

whqlibdoc.who.int

Internet Source

<1%

10

zh.scribd.com

Internet Source

<1%

11

Hani'ah, H S Firdaus, A L Nugraha. "Analysis of Environmental Vulnerability in The Landslide Areas (Case Study: Semarang Regency)", IOP Conference Series: Earth and Environmental Science, 2017

Publication

<1%

12

I Sinarta, Ahmad Rifa'i, Teuku Faisal Fathani, Wahyu Wilopo. "Slope Stability Assessment Using Trigger Parameters and SINMAP Methods on Tamblingan-Buyan Ancient Mountain Area in Buleleng Regency, Bali", Geosciences, 2017

Publication

<1%

13

www.coursehero.com

Internet Source

<1%

14

A. Dufresne, M. Geertsema, D.H. Shugar, M. Koppes et al. "Sedimentology and geomorphology of a large tsunamigenic landslide, Taan Fiord, Alaska", Sedimentary Geology, 2018

Publication

<1%

15

Abdurrohim, Hidayat Firman. "Mapping of landslide hazards prediction using geographic information system in Solok District", MATEC Web of Conferences, 2018

Publication

<1%

16

H Sulistiawan, Supriyadi, I Yulianti. "Seismic Hazard Analysis based on Earthquake Vulnerability and Peak Ground Acceleration using Microseismic Method at Universitas Negeri Semarang", Journal of Physics: Conference Series, 2017

Publication

<1%

Exclude quotes Off

Exclude matches Off

Exclude bibliography Off