

The Effect of Season on the Slope Stability Analysis: Case Study at UNNES Building, Semarang - Indonesia

by Nur Qudus

Submission date: 21-Jan-2019 08:05AM (UTC+0700)

Submission ID: 1066371035

File name: se_Study_at_UNNES_Building,_Semarang,_Indonesia___CUT_BELUM.docx (830.03K)

Word count: 1712

Character count: 10009

The Effect of Season on the Slope Stability Analysis: Case Study at UNNES Building, Semarang - Indonesia

Qudus, N.^{1, a)}, Kusumawardani, R.^{1, b)}, Chew, B.C.²⁾ and Lestari, ND^{1, c)}

^{1, a)} Universitas Negeri Semarang, Indonesia, email: nur.qudus@mail.unnes.ac.id

^{1, b)} Universitas Negeri Semarang, Indonesia, email: rini.kusumawardani@mail.unnes.ac.id

²⁾ Universiti Teknikal Melaka, Malaysia, email: bcchew@utem.edu.my

^{1, c)} Universitas Negeri Semarang, Indonesia, email: dhinurlestari@gmail.com

Abstract. A slope assessment to predict the probability of landslide occurrence and the safety factor of landslide at E9 building, Domestic Welfare Science Home Economics Department, Universitas Negeri Semarang was conducted. Considered to be carried out to obtain a safety factor index of slope and structures in study area. A rupture of soil surface appeared in some parts of the study area. It indicated an initial destruction of structure and infrastructure. Differential settlements occurred in north side of building. Therefore, a downward movement of soil, rock mass and debris move down to the slope direction was identified as an initial of hypotheses. The influence of season was analyzed in this paper. A combination of LHZ method and numerical analysis by Plaxis version 9.2 was utilized for the predicted behavior of soil movement and the safety factor. The results of analysis revealed that the safety factor in the wet season reached 1.0635 and in the dry season reached 1.075. From this results, it can be concluded that the influence of season parameter of the season did not affect for the possibility of landslide in this area.

INTRODUCTION

Problems in soft soil type, such as low bearing capacity and settlement when load subjected to soil were frequently be a such problem found in the civil construction. Some previous research defined that it was caused by the process of soil consolidation. Consolidation can be defined as an event of soil compression due to when load was subjected load subjected continuously by a construction. As a consequence, it on it which affected a water discharge from the soil pores. A settlement phenomenon which is induced a building subsidence was caused by due to of compression and deformation of the subsoil beneath the construction. Previous research revealed that soil subsidence in lowland of Semarang area ranged from 0 up to approximately 3 cm / year during twelve year observation (2001-2013) revealed a ranged from 0 up to approximately 3 cm / year. In addition in the other hand, a slope stability is one of the main problems for structure in highland area of Semarang. Some landslides phenomenon in Semarang were caused some failures in structures function. Furthermore, it caused some losses such as victims deceased and injured casualties, also economic losses (Jotisankasa, 2015). In tropical country, the most parameter which trigger a landslide phenomenon is heavy rainfall. Then, it insulating results in a loss of stability and equilibrium between residual soil and weathered rock (Thanakrit, 2015). Evaluation of soil movement which triggered a landslide phenomenon is very important for this area. Development of city drives a human mobility to highland area for install housing purposes. Landslides can be defined as a displacement of slope forming material which moves down or out the slopes. In principle, landslides occur when the driving force on a slope is greater than the resisting force. The resisting force is generally influenced by the resistance of rock and soil density, while the other parameter was increased the possibility of landslide are the slope angle, water, load, and the density of soil / rock. A slope has been stabilized in the long time because of consolidation process. Otherwise, the slope can become unstable due to several factors such as the type and state of the soil layers / slope forming rock, the addition of water content in the soil (eg, water seepage or rain infiltration), as well as the weight and load distribution (Pangemanan, 2008). Therefore, the consolidation process becomes one of the factors affecting the stability of slopes and landslide susceptibility. As a consequence, an analysis of the stability of the slope with the consolidation of input parameters using numerical applications is required. Two phenomenon above consolidation and landslide was considered as the aim of this research in order find the trigger of failure in Domestic Welfare Science Home Economics Department, Universitas Negeri Semarang.



FIGURE 1. Some failure of beam and wall in ~~Domestic Welfare Science~~ Home Economics Department, Universitas Negeri Semarang

METHODOLOGY

Location of study

The study was conducted on a slope on the side of the E9 Building, Domestic Welfare Science Department, Universitas Negeri Semarang, Semarang. The location is situated at $7^{\circ} 39,31''$ South and $110^{\circ} 4'13,15''$ East and at an altitude of ± 300 m. The topography and the slope in study area ~~could can~~ be seen in Fig. 3 and average of slope angle is 56° . The type of soil is predominantly clay and precipitation based on the data from Indonesian Agency for Meteorology, Climatology, and Geophysics (BMKG) is 101-150 cm/h. The area which was used as the object of research was 400 m^2 .



FIGURE 2. The location of landslide study on Universitas Negeri Semarang area



FIGURE 3. The inclination of the slope from the study site

Field Investigation

In this study, a Dutch Cone Penetration Test (DCPT) and Standard Penetration Test (SPT) were conducted. The results of the test are presented on Table 1 below.

TABLE 1. Identification of soil stratigraphy on the study site

No.	Depth (m)	Identification	N-SPT
1	0-1	Clay with high plasticity	5
2	1-2	Clay with high plasticity	25
3	2-3	Clay solid (cemented) padas mixed rock and sand (non-plastic) brown whitish	33
4	3-20	Clay solid (cemented) padas mixed rock and sand (non-plastic) brown whitish	> 60

Numerical Analysis

The investigation analysis was conducted; by using numerical simulation software Plaxis ~~in order to~~ find the landslide potential in the reser~~ar~~ch area. Plaxis is a numerical program based on the finite element method which used to solve many problems in geotechnical area. The resultas could ~~be used to~~ identifi~~y~~ied the deformation of soil, effective stress, behaviour of pore water pressure in relation with safety factor of construction. A problem could be analyzed ~~by using~~ axisymmetric and plane strain model. For this research, the problem was modelled by plane strain, then ~~a~~ soil data ~~was were~~ inserted for next calculation process. Furthermore, determination for suitable process analysis during calculation must be considered. Slope stability analysis was conducted to determine safety factor from potential landslides area by looking at the value of the safety factor from the output of Plaxis application which is the value of slope stability expressed in numbers (Al-Taei, 2015; Aseeja, 2016).

RESULTS AND DISCUSSION

Input Parameter

In this analysis which was described above, ~~plane strain assumption was used for the structure model was assumed as a plane strain model~~ which considered the deformation ~~was observed~~ per 1 meter and ~~length~~ perpendicular to the surface. Some variables ~~which had to be~~ considered ~~were such as~~ topograh~~y~~ of the ~~a~~ research area, soil properties, structure loading, rainfall intensity during dry and wet season. Parameters as ~~a~~ input materials for calculation process ~~was were~~ summarized in some table below. In this paper, intensity of rainfall during the different seasons, wet and dry, ~~by was~~ modelled ~~due to~~ the fluctuation of ~~water table~~ groundwater surface

TABLE 2. Summarized slope in the study area

Point	Distance (m)	Height (m)	Slop angle (°)
1	29.6	4	56.773
2	82.4	15	56.349
3	117	23	56.192
4	149	31	56.060

TABLE 3. Physical properties of soil parameters

Properties	Layer	medium Clay	Very Stiff Clay	Extremgely Stiff Clay	Extremgely Stiff Clay
Depth	-	0-2 m	2-3 m	3-4 m	> 4 m

Material models	Model	Mohr Coloumb	Mohr Coloumb	Mohr Coloumb	Mohr Coloumb
Type of soil material	Type	drained	drained	drained	drained
Soil unit weight					
continued		14	17	19	21
Below phreatic level Soil unit	γ_{sat} (kN / m ³)	16	19	20	22
Permeability in the horizontal direction	k_x (m / d)	1, E-15	1, E-15	1, E-11	1, E-11
Permeability in vertical direction	k_z (m / d)	1, E-15	1, E-15	1, E-15	1, E-15
Young's Modulus (constant)	E Refl (kN / m ²)	15000	30000	35000	50000
Poisson ratio	ν	0.35	0.3	0.25	0.2
Cohesion Cohesion (constant)	c_{ref} (kN / m ²)	20	80	120	250
friction angle	ϕ	20	20	25	25

Results Analysis

In this analysis which was described above, plane strain assumption was used for the structure model which considered such as topography a research area, soil properties, structure loading, rainfall intensity during dry and wet season. Parameters as a input material for calculation process was were summarized in some table below. In this paper, intensity of rainfall during the different seasons, wet and dry, was modelled due to the fluctuation of groundwater. From the results of the calculation, it was found that the safety factor of the slope during the rainy season compared with the rainy season obtained reached 1.0635 and in the dry season reached 1.075-. For consolidation analysis, was obtained the safety factor was 1,0804 for the safety factor.

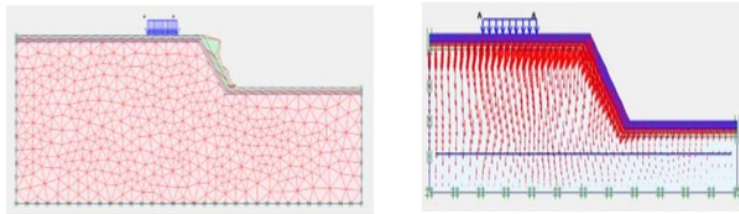


FIGURE 4. Soil deformation of the research area according to slope stability (a) and soil consolidation (b)

Conclusion

From the analysis, it revealed that consolidation process are working during the time. The longer process of consolidation resulted in the denser soil as the pressure of water pores decreased until it reached its minimum level. It was shown by the increasing safety factor index. Semakin lama proses terjadinya konsolidasi maka tanah akan semakin bertambah padat karena tekanan air pori berkurang hingga mencapai batas minimum. Hal ini dibuktikan dengan semakin bertambahnya nilai safety factor. From both the safety factor achieved in the ranging 1.07 - 1.25, it depicted bahwa showed that the slope has undergone landslide which meant that it was not safe or in critical condition lereng pernah mengalami kelongsoran atau bisa dikatakan belum aman atau dalam keadaan kritis.

ACKNOWLEDGMENTS

The author would like to thank Directorate of Higher Education of Indonesia (DIKT) for supporting research funding through the DIPA UNNES fiscal year 2016.

REFERENCES

1. A. Jotisankasa, T. Sirirattanachai, C. Rattana-areekul, K. Mahannopkul, J. Sopharat, "Engineering characterization of Vetiver system for shallow slope stabilization", The 6th International Conference on Vetiver (ICV-6), 2015, pp. 1-16
2. Al-Taei, K.N., Al-Rammahi, S.H., "Stability Analysis of Cellular Retaining Structure by PLAXIS Finite Element Code", The Iraqi Journal For Mechanical And Material Engineering, Special Issue (D), 2015, pp. 599-612
3. Aseeja, P.K., "Modelling Consolidation Behavior of Embankment Using Plaxis", International Journal of Scientific & Engineering Research, Volume 7, Issue 4, 2016, pp. 70-75
4. Pangemanan, Turangan, Sompie, Analisis Kestabilan Lereng dengan Metode Fellenius (Studi Kasus: Kawasan Citraland), Jurnal Sipil Statik, Universitas Sam Ratulangi, Manado, 2014, pp.23-28
5. T. Thanakrit, S. Phantuwongraj, M. Choowong*, T. Thitimakorn, and P. Charusiri, "Geological and engineering analysis of residual soil for forewarning landslide from highland area in northern Thailand", Open Geosci. 1 (De Gruyter Open, 2015), pp.637-645

The Effect of Season on the Slope Stability Analysis: Case Study at UNNES Building, Semarang - Indonesia

ORIGINALITY REPORT

7 %

SIMILARITY INDEX

4 %

INTERNET SOURCES

4 %

PUBLICATIONS

2 %

STUDENT PAPERS

MATCH ALL SOURCES (ONLY SELECTED SOURCE PRINTED)

2 %

★ Submitted to University of Bristol

Student Paper

Exclude quotes On

Exclude bibliography On

Exclude matches Off