

**KRONOLOGI KORESPONDENSI PUBLIKASI ARTIKEL PADA JURNAL INTERNASIONAL
BEREPUTASI DAN BERDAMPAK FAKTOR**

Judul : Biodiesel Production from Used Cooking Oil Using Integrated Double Column Reactive Distillation: Simulation Study
Jurnal : Journal of Advanced Research in Fluid Mechanics and Thermal Sciences
Volume : 94
No : 1
Halaman : 152 - 162
Tahun : 2022
Penerbit : Semarak Ilmu Publishing/ Penerbit Akademia Baru
SJR Jurnal : 0,28 (2021)
Quartile : Q3 (2021)
Penulis : Ratna DewiKusumaningtyas, Andre Dianata Hogi Kusuma, Yoshua Wira Putra Budiono, Haniif Prasetiawan, Pragusti Lintang Adhi Nanggala, I Istadi

BUKTI INDEXING JOURNAL

Terindeks Scopus SJR 0.28 (2021)

1. SCOPUS Source Details Coverage

: Scopus.com
: from 2017 – Present

The screenshot shows the Scopus Source Details page for the journal "Journal of Advanced Research in Fluid Mechanics and Thermal Sciences". The page includes the following information:

- Journal of Advanced Research in Fluid Mechanics and Thermal Sciences**
- Scopus coverage years: from 2017 to Present
- Publisher: Penerbit Akademia Baru
- ISSN: 2289-7879
- Subject area: Chemical Engineering: Fluid Flow and Transfer Processes
- Source type: Journal
- Buttons: View all documents, Set document alert, Save to source list, Source Homepage
- Metrics (right sidebar): CiteScore 2020: 1.6, SJR 2020: 0.247, SNIP 2020: 0.680
- Navigation: CiteScore, CiteScore rank & trend, Scopus content coverage
- Alert: Improved CiteScore methodology (CiteScore 2020 counts citations from 2017-2020)
- Summary (bottom): CiteScore 2020: 1.6 (1,510 Citations, 943 Documents); CiteScoreTracker 2021: 2.2 (2,609 Citations, 1,194 Documents)



Scimago Journal and Country Rank

The screenshot shows the header of the Scimago Journal and Country Rank website, including the logo and navigation menu.

Journal of Advanced Research in Fluid Mechanics and Thermal Sciences

COUNTRY	SUBJECT AREA AND CATEGORY	PUBLISHER	H-INDEX
Malaysia 	Chemical Engineering Fluid Flow and Transfer Processes	Penerbit Akademia Baru	17
PUBLICATION TYPE	ISSN	COVERAGE	
Journals	22897879	2017-2021	

SJR Information: SJR = 0.28 (2021)

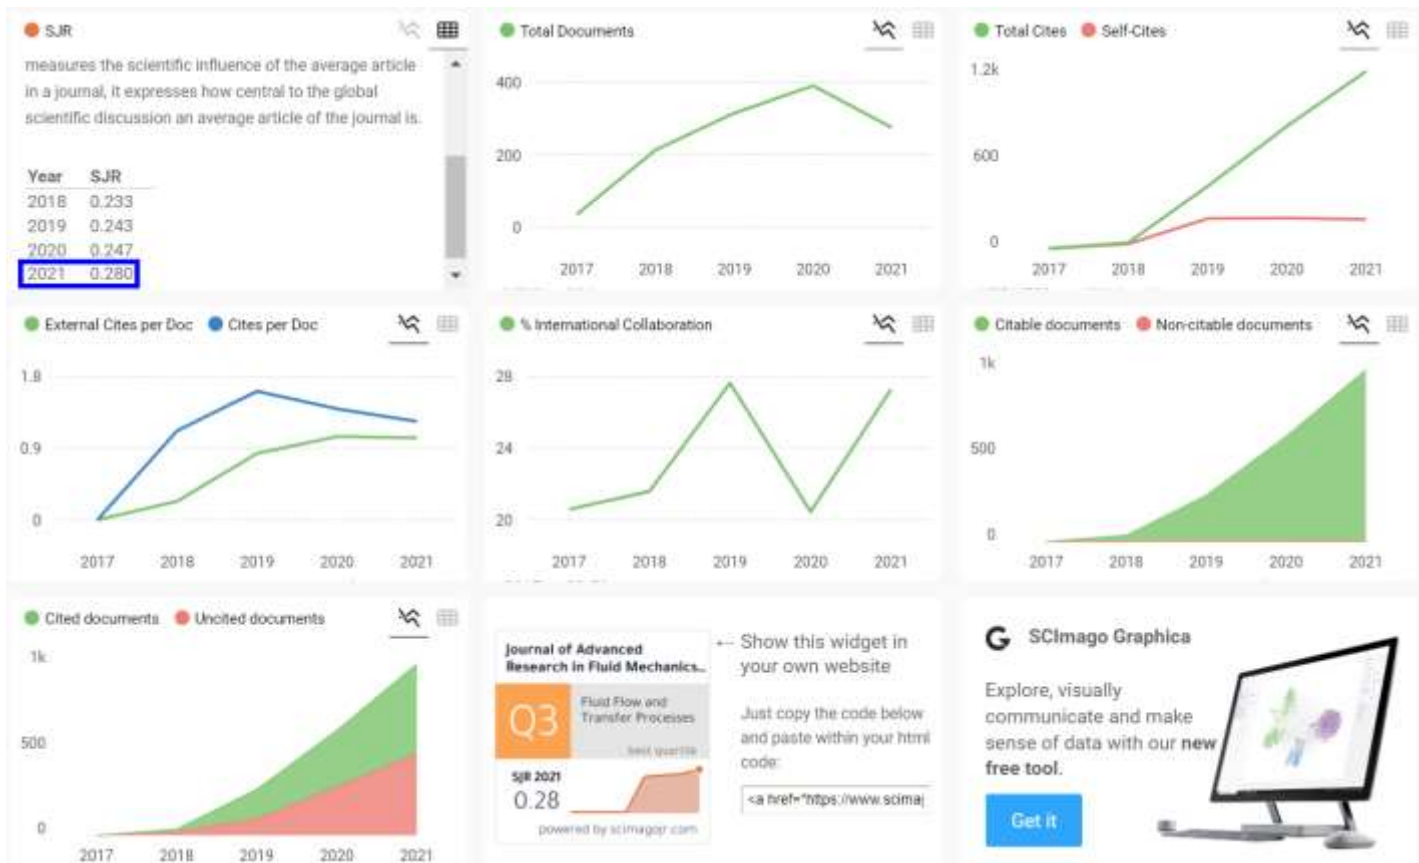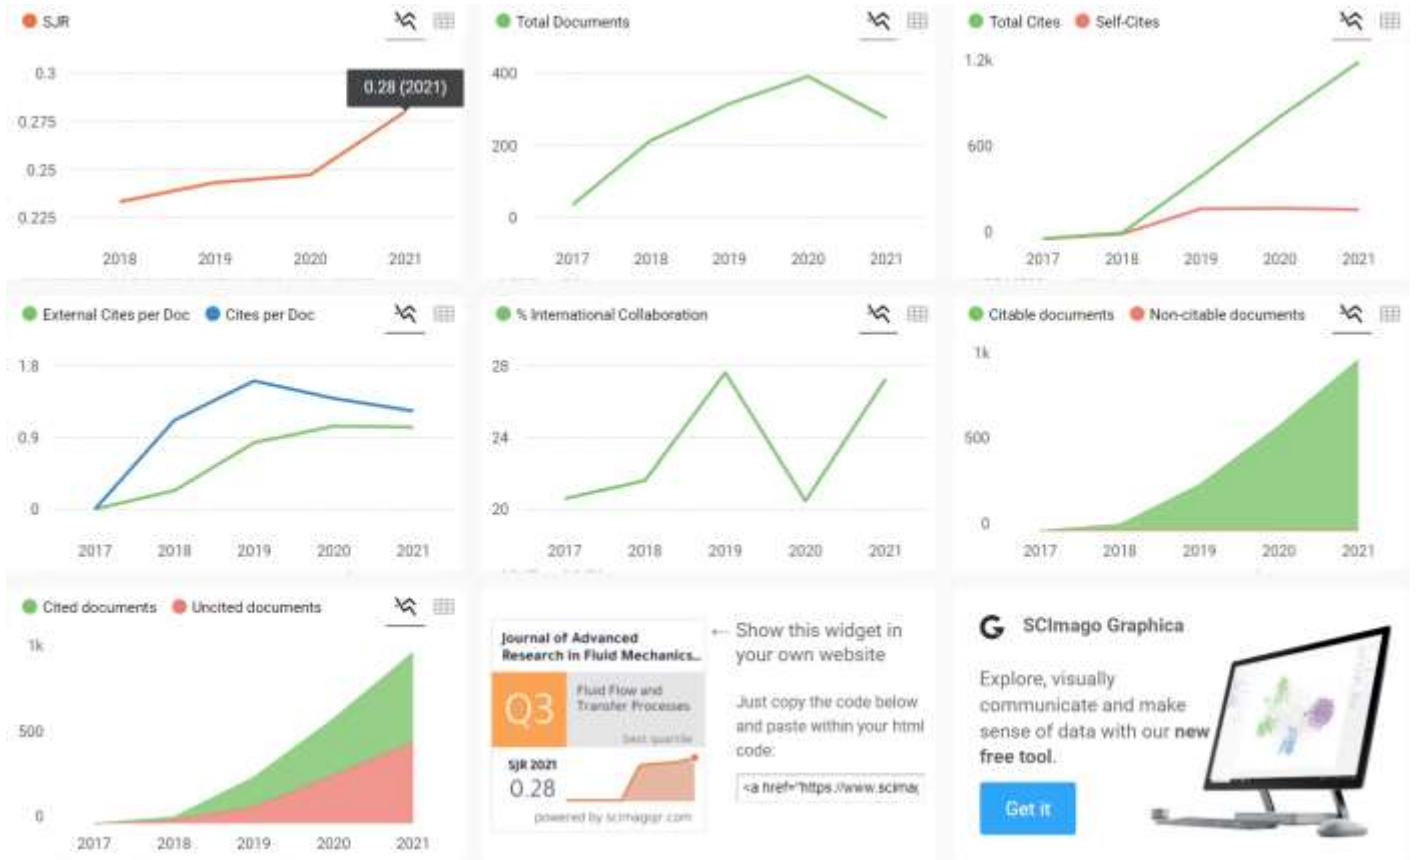

Quartile Information

Quartile = Q3 (2021) area Chemical Engineering (Fluid Flow and Transfer Process)

Quartiles

The set of journals have been ranked according to their SJR and divided into four equal groups, four quartiles.

Category	Year	Quartile
Fluid Flow and Transfer Processes	2018	Q3
Fluid Flow and Transfer Processes	2019	Q3
Fluid Flow and Transfer Processes	2020	Q4
Fluid Flow and Transfer Processes	2021	Q3

Quartiles



KRONOLOGI

No	Tanggal	Aktivitas
1	10 Oktober 2021	Submit pertama kali ke jurnal melalui sistem
2	10 Oktober 2021	Submission acknowledgment dari Editor melalui email dan sistem (web jurnal)
3	25 Oktober 2021	Pemberitahuan dari Editor mengenai hasil review dan komen dari para reviewer melalui Email dan sistem (web jurnal)
4	6 November 2021	Penulis mengunggah perbaikan manuskrip pada sistem
5	7 November 2021	Pemberitahuan dari Editor melalui email bahwa manuskrip accepted untuk publikasi
6	26 April 2022	Pemberitahuan dari Editor melalui sistem web jurnal mengenai copy editing artikel
7	24 Mei 2022	Pemberitahuan dari Editor melalui email bahwa artikel telah terbit
8	24 Juni 2022	Pemberitahuan dari Editor melalui email bahwa artikel telah terindeks scopus

The screenshot displays the 'Journal of Advanced Research in Fluid Mechanics and Thermal Sciences' submission system. The page is titled 'Submissions' and has two tabs: 'My Queue' and 'Archives' (with a count of 1). A 'Help' button is visible in the top right. The 'Archived Submissions' section includes a search bar, 'Filters', and a 'New Submission' button. A submission entry is shown for 'Ratna Dewi Kusumaningtyas et al.' with the title 'Biodiesel Production from Used Cooking Oil Using Integrated Double Column Reactive Distillat...'. The submission status is 'Published' (indicated by a green button) and 'View' (indicated by a button with a caret). Below the entry, there are two activity items: '1 Production galleys created' and '0 Open discussions'. At the bottom, it states 'Last activity recorded on Friday, May 13, 2022.'

← Back to Submissions

Workflow **Publication**

Submission Review Copyediting Production

Submission Files

Q Search

▶  15 B032.pdf	October 10, 2021	Article Text
---	------------------	--------------

Download All Files

← Back to Submissions

Workflow **Publication**

Submission **Review** Copyediting Production

Round 1

Round 1 Status

Submission accepted.

Notifications

[J. Adv. Res. Fluid Mech. Therm. Sc.] Editor Decision	2021-10-25 03:54 PM
[J. Adv. Res. Fluid Mech. Therm. Sc.] Editor Decision	2021-11-06 11:23 PM
[J. Adv. Res. Fluid Mech. Therm. Sc.] Editor Decision	2022-04-26 04:16 AM

Zoom out

← Back to Submissions

14 / Ratna Dewi Kusumaningtyas et al. / Biodiesel Production from Used Cooking Oil Using Integrated Double Column Reactive Distillation

Library

Workflow

Publication

Submission

Review

Copyediting

Production

Copyediting Discussions

Add discussion

Name	From	Last Reply	Replies	Closed
------	------	------------	---------	--------

No Items

Copyedited

Q Search

 923 [14] Layout B032 FIX.docx	April 26, 2022	Article Text
---	----------------	--------------



Ratna Dewi Kusumaningtyas <ratnadewi.kusumaningtyas@mail.unnes.ac.id>

[J. Adv. Res. Fluid Mech. Therm. Sc.] Submission Acknowledgement

Dr. Nor Azwadi Che Sidik <azwadi@semarakilmu.com.my>

Sun, Oct 10, 2021 at 6:35 PM

To: Ratna Dewi Kusumaningtyas <ratnadewi.kusumaningtyas@mail.unnes.ac.id>

Ratna Dewi Kusumaningtyas:

Thank you for submitting the manuscript, "EIC-Biodiesel Production from Used Cooking Oil Using Integrated Double Column Reactive Distillation: Simulation Study " to Journal of Advanced Research in Fluid Mechanics and Thermal Sciences. With the online journal management system that we are using, you will be able to track its progress through the editorial process by logging in to the journal web site:

Submission URL: https://semarakilmu.com.my/journals/index.php/fluid_mechanics_thermal_sciences/authorDashboard/submission/14

Username: ratnadewikusumaningtyas

If you have any questions, please contact me. Thank you for considering this journal as a venue for your work.

Dr. Nor Azwadi Che Sidik

[Journal of Advanced Research in Fluid Mechanics and Thermal Sciences](#)

Biodiesel Production from Used Cooking Oil Using Integrated Double Column Reactive Distillation: Simulation Study

Ratna Dewi Kusumaningtyas^{1*}, Andre Dianata Hogi Kusuma¹, Yoshua Wira Putra Budiono¹, Haniif Prasetiawan¹, Lintang Adhi Nanggala¹, Sarah Ayatillah¹, Nur Hayati¹, I Istadi²

¹ Chemical Engineering Department, Faculty of Engineering, Universitas Negeri Semarang
Sekaran, Gunungpati, Semarang 50229 INDONESIA

² Department of Chemical Engineering, Diponegoro University, Jln. Prof. Soedarto, Kampus UNDIP Tembalang, Semarang, Central Java, 50275 INDONESIA

*Corresponding author: ratnadewi.kusumaningtyas@mail.unnes.ac.id

Abstract. Dependency on fossil – based energy has become a global problem. Indonesia has started a movement in changing energy sources from fossil to new and renewable energy. Biodiesel is one of the renewable energy sources. Used cooking oil is one of the prospective feed-stock in biodiesel production. Used cooking oil contains 21.84% free fatty acid and 78.16% triglycerides. This study simulated the production of biodiesel from used cooking oil using the Aspen Plus v10 software. The production system used an Integrated Double Column Reactive Distillation (IDC-RD) system. The thermodynamic method employed in the simulation system was UNIQUAC. This study used the sensitivity analysis function in the Aspen Plus v10 application to analyze the effect of reflux ratio, the bottom to feed ratio, and the methanol to oil ratio on the reaction conversion. The reflux ratio applied in the simulation was 0.5 – 200, the bottom to feed ratio was 0.25 - 0.9, and the methanol to oil ratio was 1: 3 - 9:8. It was found that the esterification column with a reflux ratio of 0.5, a bottom to feed ratio of 0.5, and a methanol-oil ratio of 4: 1 resulted in a conversion of 96.59%. It was also demonstrated that the transesterification column with a reflux ratio of 0.5, a bottom to feed ratio of 0.5, and a methanol-oil ratio of 3: 1 resulted in a conversion of 99.98%.

1. Introduction

The availability of fossil energy, especially crude oil in Indonesia, has become increasingly scarce, causing Indonesia to become an importer of crude oil and its derivative products [1]. Based on data from the Indonesian Central Statistics Agency [2], it was stated that in 1996 Indonesia's oil imports amounted to 10.6893 million tons and in 2018 Indonesia's oil imports increased to 26.7371 million tons. Meanwhile, oil exports in Indonesia in 1996 amounted to 10.1338 million tons and in 2018 decreased to 3.1221 million tons. This shows that Indonesia experienced an oil balance surplus in 1996 of 555.5 thousand tons, while it experienced an oil balance deficit in 2018 of 23.615 million tons.

The increase in energy demand caused by the high rate of economic growth and population growth coupled with the depletion of world oil reserves and the problem of gas emissions caused by excess fossil fuels are strong reasons for every country to immediately develop and utilize renewable alternative energy. This alternative energy has advantages when compared to fossil energy currently in use, namely

that it will not run out if it is managed properly and is environmentally friendly, one of which is biodiesel [3].

Indonesia has created a new policy to address the problem of fossil energy and its increasing energy needs. The new national energy policy is regulated in Government Regulation No. 79/2014. The new regulation set a target for Indonesia's new and renewable energy target in 2025 which is 23% of the total national energy. One of the ways for Indonesian government to achieve the target of new and renewable energy is by issuing a mandatory policy of B30 (Biodiesel 30%)[4]. In addition to B30, the Government is starting to develop in achieving the B100 (Biodiesel 100%) program. Biodiesel is a conventional diesel engine fuel which is a mixture of fatty acid alkyl esters. Biodiesel can be produced through transesterification reactions of triglycerides contained in animal fats and plant oils with light alcohol and the presence of alkaline or acid catalysts. The direct transesterification process cannot be applied when the oil raw materials used contain high *free fatty acids* (FFA) ($> 2\%$). In the transesterification reaction, the FFA content in the raw material must be lower than 1-2% to avoid lathering reaction between FFA and alcohol which can result in increased catalyst consumption, reduce biodiesel yield, and inhibit product separation [5]. Esterification reaction must be done to reduce FFA levels by reacting FFA with alcohol.

The materials for producing biodiesel from vegetable oil consist of used cooking oil, *Calophyllum inophyllum* oil, castor oil, and many more. Used cooking oil has FFA levels of 21.84% [6], *Calophyllum inophyllum* oil and castor oil have 39% and 19.8%, respectively [7]. Biodiesel cannot have high viscosity because it will damage and interfere with engine performance so that in the selection of raw materials, viscosity is a major consideration. The viscosity of used cooking oil, *Calophyllum inophyllum* oil, and castor oil is 30 cst [8], 38.17 cst [9], and 162.8 cst [10], respectively. Used cooking oil compared to *Calophyllum inophyllum* oil and castor oil has more advantages in viscosity and FFA in used cooking oil is lower than that of *Calophyllum inophyllum* oil so that used cooking oil is suitable as a raw material for making biodiesel.

Used cooking oil is an alternative material that can be used as an ingredient for making biodiesel which can minimize environmental pollution due to the free and unmanaged disposal of used cooking oil. If left unchecked and prevented immediately, there will be a pile of carcinogenic waste oil which is detrimental for health and can also cause poisoning in the body [11]. Therefore, used cooking oil should be recycled and used as raw material for producing biodiesel. Used cooking oil production is related to the total consumption of palm oil in Indonesia. In 2018, there were 12.2 million tonnes of oil consumed domestically.

There are several advanced biodiesel manufacturing processes such as reactive distillation (RD) and ionic liquid (IL) application. The use of Ionic Liquid has disadvantages for its expensive price of Ionic Liquid and the long reaction time. On the other hand, reactive distillation integrates reaction and separation in one unit column [12]. It has advantages since it needs a small ratio of oil alcohol, low operating temperature, lower costs, less waste products, low reactant costs, increased conversion through product removal, and useful to limit the azeotropic conditions in the column [13].

To get the reactive distillation column modelling, a simulation is required by using Aspen Plus software version 10.0 in a steady state condition. Souza et al. [14] have optimized the process of making biodiesel using HYSYS v7.2 resulting in an increase in conversion of 18% and an error of 3.2%. Smejkal et al [15] has made a comparison between simulation using Aspen Plus and Hysys in the reactive distillation system. It was found that the error produced by Aspen Plus and Hysys were 1.2% and 2.8%, respectively. Based on the error parameter and the description above, Aspen Plus has more advantages in simulating the reactive distillation process. Therefore, in this work, Aspen Plus was employed for the simulation of reactive distillation to produce biodiesel. Process simulation is urgent for designing processing equipment to scale up and predict tool performance on an industrial scale. In this simulation, process optimization was carried out using the sensitivity analysis feature on the variable reflux ratio (RR), feed ratio (FR), feed stage (FS), and distillate rate (DR).


The thermodynamic model used in this study was the UNIQUAC model which was rarely used in other literature. The UNIQUAC model is more suitable for calculating the non-ideal characteristic of the liquid mixture such as the system in biodiesel synthesis [16]. Çağatay and Karacan [17]cagatay have performed a simulation using reactive distillation and heterogeneous catalysts for biodiesel production

using used cooking oil as raw material. However, the system used in the research was a single column which only involved a transesterification reaction while the esterification as pre-treatment step was carried out separately. This study offered a novelty in biodiesel manufacturing process technology which was Integrated Double Column Reactive Distillation (IDC-RD). IDC-RD used a two column reactive distillation system which integrated the esterification and transesterification processes in one set of equipment to produce biodiesel with a more optimal yield. This work revealed the effect of the main parameters on biodiesel manufacturing process using IDC-RD which will be useful for process design and scale-up.

2. Method

In this work, an integrated double column reactive distillation (IDR-RC) was applied to produce biodiesel. Two reactions, namely esterification and transesterification reactions, were performed consecutively in the two reactive distillation column. The esterification reaction was conducted as the pre-treatment step to reduce the free fatty acid (FFA) content in used cooking oil in the first column. Subsequently, transesterification reaction as the main reaction to produce biodiesel was carried out in the second reactive distillation column. The simulation process of biodiesel production from used cooking oil using IDC-RD was performed with ASPEN Plus V10.0.

The formula for the transesterification reaction is exhibited in Equation 1.

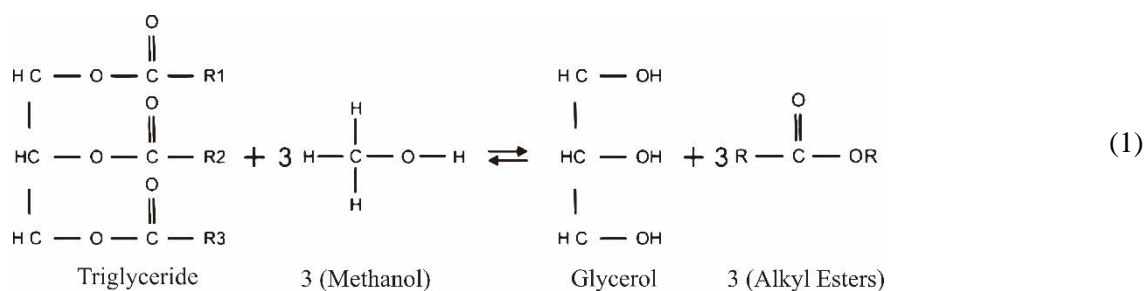

The feed-stock for biodiesel synthesis in this work was used cooking oil which contained 21.84% FFA and 78.16% triglycerides. Fatty acid composition of the raw material was presented in Table 1 [6].

Table 1. Fatty Acid Composition of the Used Cooking Oil

Component	% mole
Palmitic Acid	1.4196
Linoleic Acid	8.3429
Oleic Acid	8.8452
Stearic Acid	0.3058
Linolenic Acid	2.9266
Tripalmitate	5.0804
Trilinoleate	29.8571
Trioleate	31.6548
Tristearat	1.0942
Trilinolenic	10.4734

The kinetics data of the esterification reaction taken from the literature can be seen on Table 2 [18].

Table 2. Esterification reaction data of used cooking oil

Parameter	Collision Factor (A)	Activation Energy (Ea)
	$A^-_1 = 128.8$ /minute	$Ea^-_1 = 4.239$ kJ/mole
	$A^+_1 = 1.307 \times 10^3$ /minute	$Ea^+_1 = 18.59$ kJ/mole
T boiling point methanol	64.7°C	

The kinetics data of the transesterification reaction kinetics taken from the literature is demonstrated in Table 3 [19].

Table 3. Data of used cooking oil transesterification reactions

Parameter	Collision Factor	Activation Energy
	$A_2 = 2.9 \times 10^7$ / minute	$Ea_2 = 53.99$ kJ/mole
T boiling point methanol	64.7°C	

3. Results and Discussion

In this study, an Integrated Double Column Reactive Distillation (IDC-RD) simulation has been performed. IDC-RD applied two column reactive distillations which integrated in one set of equipment to accomplish the esterification and transesterification processes consecutively. Esterification reaction of used cooking oil with methanol is a crucial step to reduce the high FFA content prior to the main transesterification reaction to produce biodiesel. The process flow simulation is shown in Figure 1. The Basic simulation and sensitivity analysis was performed to examine the effect of the reflux ratio, the methanol to oil ratio, and the bottom to feed ratio on the reaction conversion.

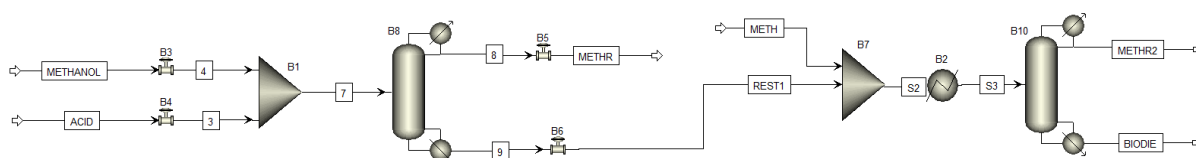


Figure 1. Steady State Aspen Plus v10.0 Simulation Flowsheet of the IDC-RC of Biodiesel Production

3.1. Basic Simulation of Steady State Reactive Distillation (RD) Esterification Column

Esterification is a crucial step for reducing the FFA content prior to transesterification reaction in order to avoid the undesired saponification side reaction [20]. The main parameters of the IDC-RD for the esterification process were inputted into the Aspen Plus V10.0 using the radfrac type device. The basic simulation parameters were as follows: the number of stages was 5, the reaction zone was at stage 3, the input feed zone was at stage 2, the feed temperature was 60 °C, the pressure was set at the atmospheric pressure, the feed (oil to methanol) ratio was 1: 4, the bottom to feed ratio was 0.5, and the reflux ratio was 0.5. The results showed that the FFA, which was composed of oleic acid, linoleic acid, palmitic acid, stearic acid, and linolenic acid, decreased up to 96.59 % due to the reaction process with methanol. Those fatty acids were converted into methyl oleate, methyl linoleate, methyl palmitate, methyl stearic, and methyl linolenic acid, correspondingly. This result was considerably higher than the similar reaction conducted using the other types of biodiesel synthesis technology. Agustian et al [21] reported that the esterification of used cooking oil using ultrasonic reactor resulted in a conversion of 42.08%. Another study conducted by Mengyu et al [18] conveyed that the esterification of used cooking oil using conventional methods in the presence of Fe_2SO_4/C catalyst resulted in 96% conversion.

3.1.1. Effect of the Reflux Ratio on the FFA Conversion

Figure 2 displays the effect of the reflux ratio on the FFA conversion. The higher reflux ratio led to the higher FFA conversion. This was due to the fact that the higher reflux denoted the longer reaction time. It implied that more intensive contact between the reactant molecules, yielding the higher conversion. Based on sensitivity analysis, the optimum result was obtained at the reflux ratio of 25 with a FFA conversion of 98.95%.

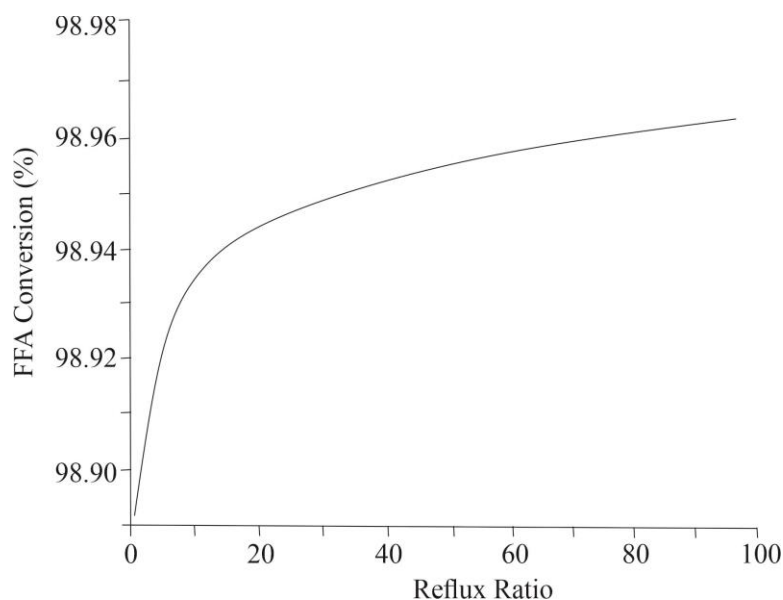


Figure 2. The Effect of Reflux Ratio on the FFA Conversion

3.1.2. The Effect of the Feed Ratio on the FFA Conversion

Figure 3 reveals the effect of feed (methanol to oil) ratio on the FFA conversion. It was revealed that the higher methanol to oil ratio brought about the higher FFA conversion. This phenomenon occurred since the addition of the methanol will caused the excess of the reactant, which improved the reaction conversion. The result of the sensitivity analysis disclosed that the highest conversion was achieved at the methanol to oil ratio of 13, resulting in the FFA conversion of 99.591. This result was higher to a great extent compared to the conversion provided by the conventional reactor for the identical value of the reactant molar ratio.

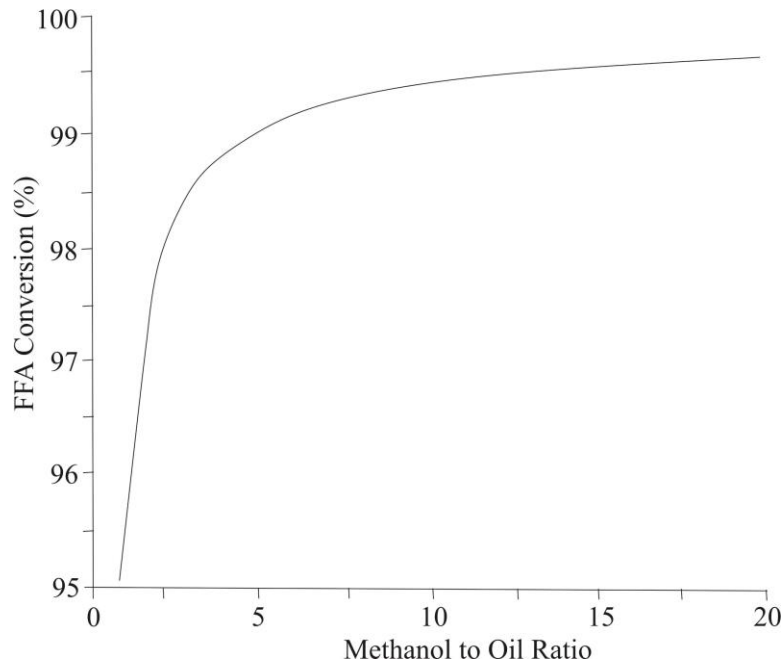


Figure 3. The Effect of the Methanol to Oil Ratio on the FFA Conversion

3.1.3. The Effect of Bottom to Feed Ratio on FFA Conversion

Figure 4 indicates that the higher bottom to feed ratio led to the higher FFA conversion. This arose since the higher methanol concentration at the bottom will cause a high excess methanol to FFA. On the other hand, esterification is an equilibrium limited reaction, where the far excess reactant will shift the reaction towards the product formation and precede a higher conversion. Based on sensitivity analysis, the optimum result was obtained at a bottom to feed ratio of 0.75 with a conversion of 98.828%.

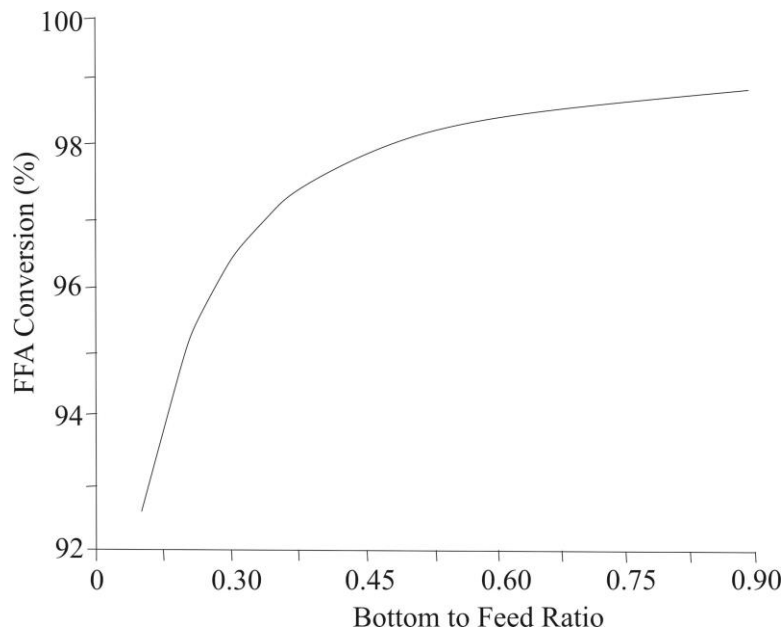


Figure 4. The Effect of Bottom to Feed Ratio on the FFA Conversion

3.2. Basic Simulation of Steady State Reactive Distillation (RD) Transesterification Column

The main parameters were inputted into the Aspen Plus V10.0 using the radfrac type device. The basic simulation parameters set up were as follows: the number of stages was 5, the reaction zone was at stage 3, feed point location was at stage 2, the feed temperature was 65°C, the operation was conducted at the

atmospheric pressure, the feed ratio of oil to methanol was 1: 3, the bottom to feed ratio was 0.5, and the reflux ratio was 0.5. The results exhibited that triglycerides in the form of tripalmitin, tristearin, triolein, trilinolein, and trilinolenin reacted with methanol almost completely. The conversion attained in the transesterification reaction using IDC-RD was 99.98%. It was notably superior compared to those resulted using conventional method and ultrasonic reactor which were 53.6% [22] and 92% [23].

3.2.1. The Effect of Reflux Ratio on Triglyceride Conversion

Figure 5 discloses the effect of reflux ratio on triglyceride conversion. It can be observed that the higher reflux ratio enhanced the triglyceride conversion. This fact occurred since more reflux generated a longer contact between the reactants, leading to the higher reaction conversion.

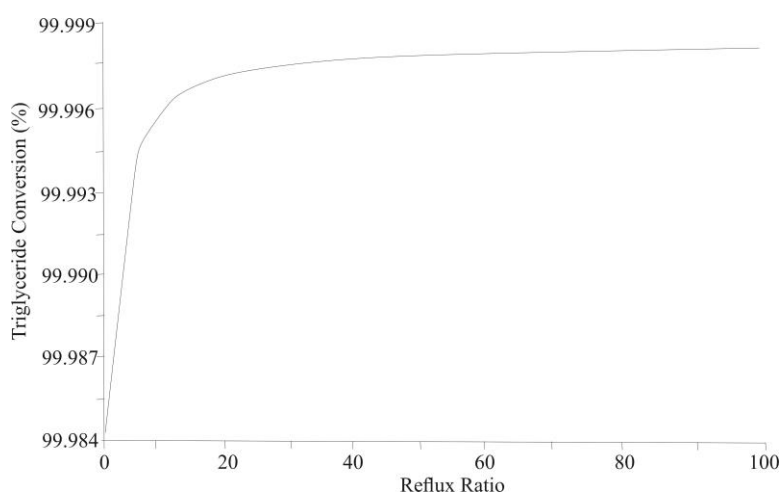


Figure 5. The Effect of Reflux Ratio on Triglyceride Conversion

3.2.2. The Effect of Methanol-Oil Ratio on Triglyceride Conversion

The effect of feed (methanol to oil) ratio on the triglyceride conversion was disclosed in Figure 6. The simulation show that the higher methanol to oil ratio promoted the triglyceride conversion. This was attributable to the fact that the higher excess of reactant will drive the equilibrium-limited reaction to right, affording a higher reaction conversion.

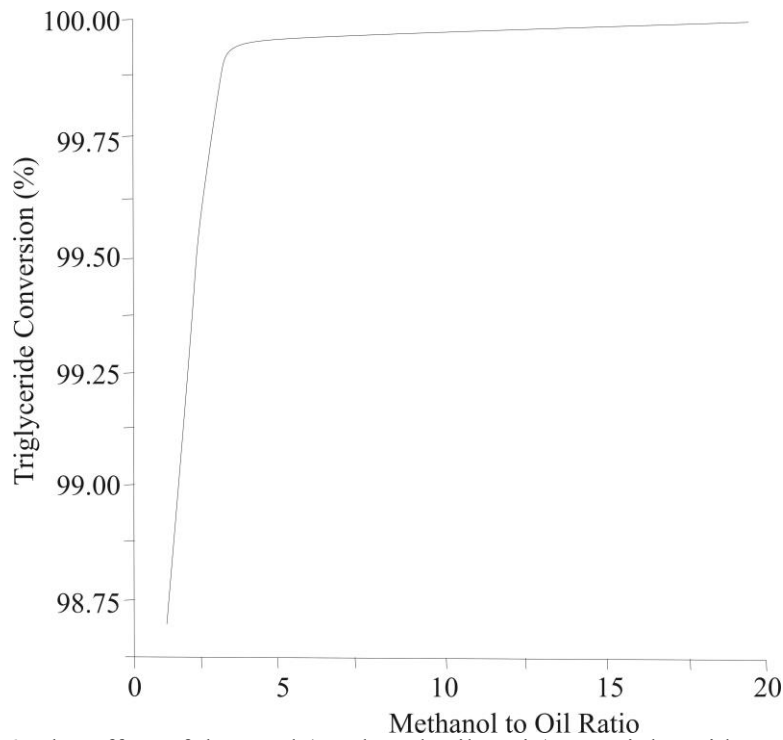


Figure 6. The Effect of the Feed (Methanol-Oil Ratio) on Triglyceride Conversion

3.2.3. Effect of Bottom to Feed Ratio on Triglyceride Conversion

Figure 7 shows that the higher bottom to feed ratio leads to the lower triglyceride conversion in the transesterification. This was because the higher bottom to feed ratio initiated the less reflux ratio in the distillate, thus reducing the conversion.

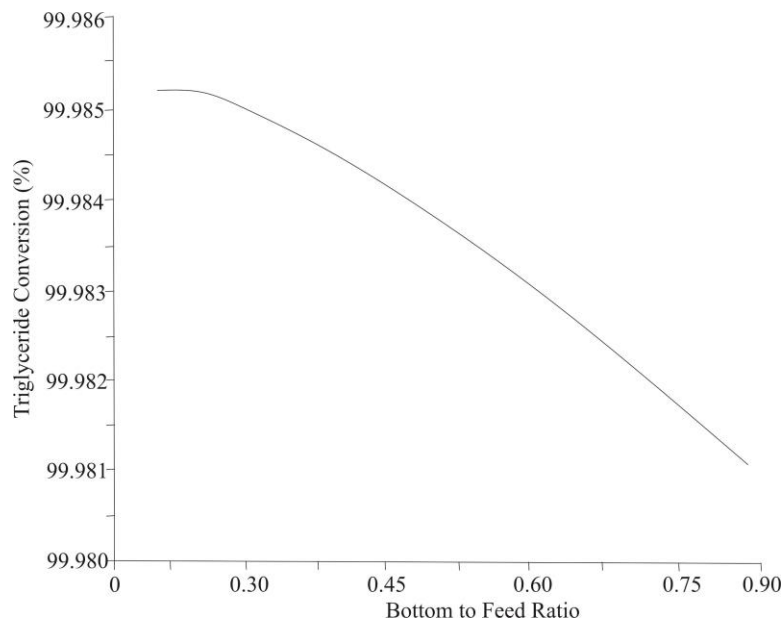


Figure 7. The Effect of the Bottom to Feed Ratio on the Triglyceride Conversion

4. Conclusion

Based on the results of the steady state simulation study of Integrated Double Column Reactive Distillation (IDC-RC) esterification and transesterification of used cooking oil into biodiesel using Aspen Plus V10 software, it can be inferred as follows. The basic simulation of FFA esterification

process of used cooking oil using IDC-RD provided a conversion of 96.59 % with a reflux ratio of 0.5, a bottom to feed ratio of 0.5, and a feed methanol-oil ratio of 4: 1. The effect of each parameter was evaluated independently using sensitivity analysis. The sensitivity analysis revealed that the higher reflux ratio, methanol to oil ratio, and bottom to feed ratio increased the FFA conversion. It was also discovered that esterification using a reflux ratio of 25 resulted in a conversion of 98.95%, a bottom to feed ratio of 0.75 gave a conversion of 98.828%, and a feed (methanol to oil) ratio of 13: 1 contributed to the conversion of 99.591%. The second column was assigned for the transesterification reaction. The basic simulation on the transesterification process of used cooking oil on IDC-RD denoted a conversion of 99.98% with a reflux ratio of 0.5, a bottom to feed ratio of 0.5, and a feed methanol-oil ratio of 3: 1. However, the results of sensitivity analysis on the IDC-RD transesterification demonstrated that changing of the process parameter slightly influenced the reaction conversion since a high conversion has been reach using basic parameter condition.

Acknowledgement

The funding resource from the Directorate of Research and Community Service – Ministry of Research, Technology and Higher Education (DRPM – Kemenristekdikti) through the Hibah Pasca Doktor Grant with the contract number of 078/SP2H/LT/DRPM/2019 (internal contract number of 15.18.3/UN37/PPK.3.1/2019).

Reference

- [1] Heyko E, Hasid Z and Priyagus P 2016 Strategi Pemanfaatan Energi Terbarukan Dalam Rangka Kemandirian Energi Daerah Provinsi Kalimantan Timur *Ekon. Keuangan, dan Manaj.* **12** 1–28
- [2] BPS 2019 *Statistik Kelapa Sawit Indonesia 2018* vol 1, ed S-D of E C Statistics (Jakarta: BPS-Statistics Indonesia)
- [3] Noshadi I, Amin N A S and Parnas R S 2012 Continuous production of biodiesel from waste cooking oil in a reactive distillation column catalyzed by solid heteropolyacid: Optimization using response surface methodology (RSM) *Fuel* **94** 156–64
- [4] EBTKE 2021 Kiprah Biodiesel Dalam Mendukung Pengembangan Energi Baru Terbarukan : Capaian Program B30 pada Semester I 2021 *Article* 1
- [5] Kusumaningtyas R D, Handayani P A, Rochmadi, Purwono S and Budiman A 2014 Tin (II) Chloride Catalyzed Esterification of High FFA Jatropha Oil: Experimental and Kinetics Study *Int. J. Renew. Energy Dev.* **3** 75–81
- [6] Jain S, Sharma M P and Rajvanshi S 2011 Acid base catalyzed transesterification kinetics of waste cooking oil *Fuel Process. Technol.* **92** 32–8
- [7] Kumar M and Sharma M P 2015 Assessment of potential of oils for biodiesel production *Renew. Sustain. Energy Rev.* **44** 814–23
- [8] Valente O S, Pasa V M D, Belchior C R P and Sodré J R 2011 Physical–chemical properties of waste cooking oil biodiesel and castor oil biodiesel blends *Fuel* **90** 1700–2
- [9] Elangovan T, Anbarasu G and Jeryraj Kumar L 2016 Development of calophyllum inophyllum biodiesel and analysis of its properties at different blends *Int. J. ChemTech Res.* **9** 220–9
- [10] T.I, O, K.A, A, M.O, D and K.O O 2015 Determination of Some Physical Properties of Jatropha (Jatropha Curcas) Oil. *Int. J. Eng. Res.* **4** 331–8
- [11] Hanafie A, Haslinah A, Qalaman Q and Made A 2019 Permodelan Karakteristik Biodiesel Dari Minyak Jelantah *ILTEK J. Teknol.* **12** 1775–9
- [12] Kusumaningtyas R D, Prasetyawan H, Pratama B R, Prasetya D and Hisyam A 2018 Esterification of non-edible oil mixture in reactive distillation column over solid acid catalyst: Experimental and simulation study *J. Phys. Sci.* **29** 212–26
- [13] Kumar A and Sharma S 2011 Potential non-edible oil resources as biodiesel feedstock: An Indian perspective *Renew. Sustain. Energy Rev.* **15** 1791–800
- [14] Souza T P C, Stragevitch L, Knoechelmann A, Pacheco J G A and Silva J M F 2014 Simulation and preliminary economic assessment of a biodiesel plant and comparison with reactive distillation *Fuel Process. Technol.* **123** 75–81

- [15] Smejkal Q and Šoš M 2002 Comparison of computer simulation of reactive distillation using aspen plus and hysys software *Chem. Eng. Process. Process Intensif.* **41** 413–8
- [16] Pirola C, Galli F, Corbetta M and Manenti F 2015 Robust kinetic modeling of heterogeneously catalyzed free fatty acids esterification in monophasic liquid/solid packed bed reactor: rival model discrimination *Clean Technol. Environ. Policy* **17** 1139–47
- [17] Gerbaud V and Rodriguez-Donis I 2019 *Advances in Extractive Distillation* (Elsevier Inc.)
- [18] GAN M, PAN D, MA L, YUE E and HONG J 2009 The Kinetics of the Esterification of Free Fatty Acids in Waste Cooking Oil Using $\text{Fe}_2(\text{SO}_4)_3/\text{C}$ Catalyst *Chinese J. Chem. Eng.* **17** 83–7
- [19] Talebian-Kiakalaieh A, Amin N A S, Zarei A and Noshadi I 2013 Transesterification of waste cooking oil by heteropoly acid (HPA) catalyst: Optimization and kinetic model *Appl. Energy* **102** 283–92
- [20] Kusumaningtyas R D, Ratrianti N, Purnamasari I and Budiman A 2017 Kinetics study of *Jatropha* oil esterification with ethanol in the presence of tin (II) chloride catalyst for biodiesel production *AIP Conf. Proc.* **1788** 30086
- [21] Agustian E, Jessica J, Untoro P and Sulaswatty A 2019 Esterification of Waste Cooking Oil Using Ultrasonic: Kinetic Study *J. Kim. Terap. Indones.* **20** 57–68
- [22] Hsiao M C, Hou S S, Kuo J Y and Hsieh P H 2018 Optimized conversion of waste cooking oil to biodiesel using calcium methoxide as catalyst under homogenizer system conditions *Energies* **11**
- [23] Pukale D D, Maddikeri G L, Gogate P R, Pandit A B and Pratap A P 2015 Ultrasound assisted transesterification of waste cooking oil using heterogeneous solid catalyst *Ultrason. Sonochem.* **22** 278–86

[J. Adv. Res. Fluid Mech. Therm. Sc.] Editor Decision

Nor Azwadi <azwadi@semarakilmu.com.my>

Mon, Oct 25, 2021 at 10:54 PM

To: Ratna Dewi Kusumaningtyas <ratnadewi.kusumaningtyas@mail.unnes.ac.id>

Ratna Dewi Kusumaningtyas:

We have reached a decision regarding your submission to Journal of Advanced Research in Fluid Mechanics and Thermal Sciences, "EIC-Biodiesel Production from Used Cooking Oil Using Integrated Double Column Reactive Distillation: Simulation Study".

Our decision is: Revisions Required

Please submit the revised article by 5 Nov 2021__

Editorial Comments:

Please cite few articles from

<http://www.akademiabaru.com/submit/index.php/araset><http://www.akademiabaru.com/submit/index.php/cfdl><http://www.akademiabaru.com/submit/index.php/armne><http://www.akademiabaru.com/submit/index.php/arnht><http://www.akademiabaru.com/submit/index.php/arefmht><http://www.akademiabaru.com/submit/index.php/aram>-----
Reviewer A:

Grammar and Spelling:

No language mistakes. Good sentence and paragraph structure and transitions.

Abstract:

Abstract section is excellently written. The abstract has all the required elements. Points are connected properly.

Quality of Tables and Figures:

Tables and figures have excellent clarity and numbered. All tables and figures are mentioned in text and properly discussed.

Conclusion:

Conclusion related to objective. Well written.

References:

Citing related and recent articles. Most of the references are updated and reliable.

Recommendation: Accept Submission

Journal of Advanced Research in Fluid Mechanics and Thermal Sciences

Notifications**[J. Adv. Res. Fluid Mech. Therm. Sc.] Editor Decision**

2021-10-25 03:54 PM

Ratna Dewi Kusumaningtyas:

We have reached a decision regarding your submission to Journal of Advanced Research in Fluid Mechanics and Thermal Sciences, "EIC-Biodiesel Production from Used Cooking Oil Using Integrated Double Column Reactive Distillation: Simulation Study".

Our decision is: Revisions Required

Please submit the revised article by 5 Nov 2021__

Editorial Comments:

Please cite few articles from

<http://www.akademiabaru.com/submit/index.php/araset>

<http://www.akademiabaru.com/submit/index.php/cfdl>

<http://www.akademiabaru.com/submit/index.php/armne>

<http://www.akademiabaru.com/submit/index.php/arnht>

<http://www.akademiabaru.com/submit/index.php/arefmht>

<http://www.akademiabaru.com/submit/index.php/aram>

Reviewer A:

Grammar and Spelling:

No language mistakes. Good sentence and paragraph structure and transitions.

Notifications**[J. Adv. Res. Fluid Mech. Therm. Sc.] Editor Decision**

2021-10-25 03:54 PM

Ratna Dewi Kusumaningtyas:

We have reached a decision regarding your submission to Journal of Advanced Research in Fluid Mechanics and Thermal Sciences, "EIC-Biodiesel Production from Used Cooking Oil Using Integrated Double Column Reactive Distillation: Simulation Study".

Our decision is: Revisions Required

Please submit the revised article by 5 Nov 2021__

Editorial Comments:

Please cite few articles from

<http://www.akademiabaru.com/submit/index.php/araset>

<http://www.akademiabaru.com/submit/index.php/cfdl>

<http://www.akademiabaru.com/submit/index.php/armne>

<http://www.akademiabaru.com/submit/index.php/arnht>

<http://www.akademiabaru.com/submit/index.php/arefmht>

<http://www.akademiabaru.com/submit/index.php/aram>

Reviewer A:

Grammar and Spelling:

No language mistakes. Good sentence and paragraph structure and transitions.



Biodiesel Production from Used Cooking Oil Using Integrated Double Column Reactive Distillation: Simulation Study

Ratna Dewi Kusumaningtyas^{1*}, Andre Dianata Hogi Kusuma¹, Yoshua Wira Putra Budiono¹, Haniif Prasetiawan¹, Pragusti Lintang Adhi Nanggala¹, I Istadi²

¹ Chemical Engineering Department, Faculty of Engineering, Universitas Negeri Semarang Sekaran, Gunungpati, Semarang 50229 Indonesia

² Department of Chemical Engineering, Diponegoro University, Jln. Prof. Soedarto, Kampus UNDIP Tembalang, Semarang, Central Java, 50275 Indonesia

ARTICLE INFO

ABSTRACT

Article history:

Received 29 October XXXX

Received in revised form 1 December XXXX

Accepted 9 December XXXX

Available online 10 December XXXX

Keywords:

Reactive distillation, Biodiesel,
Simulation, Aspen, UNIQUAC

Dependency on fossil – based energy has become a global problem. Indonesia has started a movement in changing energy sources from fossil to new and renewable energy. Biodiesel is one of the renewable energy sources. Used cooking oil is one of the prospective feed-stock in biodiesel production. Used cooking oil contains 21.84% free fatty acid and 78.16% triglycerides. This study simulated the production of biodiesel from used cooking oil using the Aspen Plus v10 software. The production system used an Integrated Double Column Reactive Distillation (IDC-RD) system. The thermodynamic method employed in the simulation system was UNIQUAC. This study used the sensitivity analysis function in the Aspen Plus v10 application to analyze the effect of reflux ratio, the bottom to feed ratio, and the methanol to oil ratio on the reaction conversion. The reflux ratio applied in the simulation was 0.5 – 200, the bottom to feed ratio was 0.25 - 0.9, and the methanol to oil ratio was 1: 3 - 9:8. It was found that the esterification column with a reflux ratio of 0.5, a bottom to feed ratio of 0.5, and a methanol-oil ratio of 4: 1 resulted in a conversion of 96.59%. It was also demonstrated that the transesterification column with a reflux ratio of 0.5, a bottom to feed ratio of 0.5, and a methanol-oil ratio of 3: 1 resulted in a conversion of 99.98%.

1. Introduction

The availability of fossil energy, especially crude oil in Indonesia, has become increasingly scarce, causing Indonesia to become an importer of crude oil and its derivative products [1]. Based on data from the Indonesian Central Statistics Agency [2], it was stated that in 1996 Indonesia's oil imports amounted to 10.6893 million tons and in 2018 Indonesia's oil imports increased to 26.7371 million tons. Meanwhile, oil exports in Indonesia in 1996 amounted to 10.1338 million tons and in 2018 decreased to 3.1221 million tons. This shows that Indonesia experienced an oil balance surplus in

* Corresponding author.

E-mail address: ratnadewi.kusumaningtyas@mail.unnes.ac.id

<https://doi.org/10.37934/arfmts.XX.X.XX>

1996 of 555.5 thousand tons, while it experienced an oil balance deficit in 2018 of 23.615 million tons.

The increase in energy demand caused by the high rate of economic growth and population growth coupled with the depletion of world oil reserves and the problem of gas emissions caused by excess fossil fuels are strong reasons for every country to immediately develop and utilize renewable alternative energy. This alternative energy has advantages when compared to fossil energy currently in use, namely that it will not run out if it is managed properly and is environmentally friendly, one of which is biodiesel [3]. Based on the environmental perspective, biodiesel is an interesting renewable energy to be widely applied since it is non-toxic, has a low aromatic content, and release a lower greenhouse gases such as unburned hydrocarbon, carbon monoxide, and particulate matters [4].

Indonesia has created a new policy to address the problem of fossil energy and its increasing energy needs. The new national energy policy is regulated in Government Regulation No. 79/2014. The new regulation set a target for Indonesia's new and renewable energy target in 2025 which is 23% of the total national energy. One of the ways for Indonesian government to achieve the target of new and renewable energy is by issuing a mandatory policy of B30 (Biodiesel 30%) [5]. In addition to B30, the Government is starting to develop in achieving the B100 (Biodiesel 100%) program.

Biodiesel is an alternative diesel engine fuel which consists of a mixture of fatty acid alkyl esters. Biodiesel can be produced through transesterification reactions of triglycerides contained in animal fats and plant oils with light alcohol and the presence of alkaline or acid catalysts. The reaction results in biodiesel as main product and glycerine as the by-product [6]. The direct transesterification process cannot be applied when the oil raw materials used contain high *free fatty acids* (FFA) (> 2%). In the transesterification reaction, the FFA content in the raw material must be lower than 1-2% to avoid lathering reaction between FFA and alcohol which can result in increased catalyst consumption, reduce biodiesel yield, and inhibit product separation [7]. Esterification reaction must be done to reduce FFA levels by reacting FFA with alcohol.

The materials for producing biodiesel from vegetable oil consist of used cooking oil, *Calophyllum inophyllum* oil, castor oil, and many more. Used cooking oil has FFA levels of 21.84% [8], *Calophyllum inophyllum* oil and castor oil have 39% and 19.8%, respectively [9]. Biodiesel cannot have high viscosity because it will damage and interfere with engine performance so that in the selection of raw materials, viscosity is a major consideration. The viscosity of used cooking oil, *Calophyllum inophyllum* oil, and castor oil is 30 cst [10], 38.17 cst [11], and 162.8 cst [12], respectively. Used cooking oil compared to *Calophyllum inophyllum* oil and castor oil has more advantages in viscosity and FFA in used cooking oil is lower than that of *Calophyllum inophyllum* oil so that used cooking oil is suitable as a raw material for making biodiesel.

Used cooking oil is an alternative material that can be used as an ingredient for making biodiesel which can minimize environmental pollution due to the free and unmanaged disposal of used cooking oil. If left unchecked and prevented immediately, there will be a pile of carcinogenic waste oil which is detrimental for health and can also cause poisoning in the body [13]. Therefore, used cooking oil should be recycled and used as raw material for producing biodiesel. Used cooking oil production is related to the total consumption of palm oil in Indonesia. In 2018, there were 12.2 million tonnes of oil consumed domestically.

There are several advanced biodiesel manufacturing processes such as reactive distillation (RD) and ionic liquid (IL) application. The use of Ionic Liquid has disadvantages for its expensive price of Ionic Liquid and the long reaction time. On the other hand, reactive distillation integrates reaction and separation in one unit column [14]. It has advantages since it needs a small ratio of oil

alcohol, low operating temperature, lower costs, less waste products, low reactant costs, increased conversion through product removal, and useful to limit the azeotropic conditions in the column [15].

There are some parameters that affect the performance of the reactive distillation for biodiesel production. Modeling and simulation is often used for determining the effect of main parameters on the biodiesel conversion to reduce the number of experimental investigation which is usually costly. Modeling, simulation and numerical method are widely applied in engineering area. Many work related to the simulation using various tools have been reported in literature [16,17,18,19].


In this work, reactive distillation simulation was conducted using Aspen Plus software version 10.0 in a steady state condition. Souza *et al.* [20] have optimized the process of making biodiesel using HYSYS v7.2 resulting in an increase in conversion of 18% and an error of 3.2%. Smejkal *et al* [21] has made a comparison between simulation using Aspen Plus and Hysis in the reactive distillation system. It was found that the error produced by Aspen Plus and Hysis were 1.2% and 2.8%, respectively. Based on the error parameter and the description above, Aspen Plus has more advantages in simulating the reactive distillation process. Therefore, in this work, Aspen Plus was employed for the simulation of reactive distillation to produce biodiesel. Process simulation is urgent for designing processing equipment to scale up and predict tool performance on an industrial scale. In this simulation, process optimization was carried out using the sensitivity analysis feature on the variable reflux ratio (RR), feed ratio (FR), feed stage (FS), and distillate rate (DR).

The thermodynamic model used in this study was the UNIQUAC model which was rarely used in other literature. The UNIQUAC model is more suitable for calculating the non-ideal characteristic of the liquid mixture such as the system in biodiesel synthesis [22]. Çağatay and Karacan [23] cagatay have performed a simulation using reactive distillation and heterogeneous catalysts for biodiesel production using used cooking oil as raw material. However, the system used in the research was a single column which only involved a transesterification reaction while the esterification as pre-treatment step was carried out separately. This study offered a novelty in biodiesel manufacturing process technology which was Integrated Double Column Reactive Distillation (IDC-RD). IDC-RD used a two column reactive distillation system which integrated the esterification and transesterification processes in one set of equipment to produce biodiesel with a more optimal yield. This work revealed the effect of the main parameters on biodiesel manufacturing process using IDC-RD which will be useful for process design and scale-up.

2. Methodology

In this work, an integrated double column reactive distillation (IDR-RC) was applied to produce biodiesel. Two reactions, namely esterification and transesterification reactions, were performed consecutively in the two reactive distillation column. The esterification reaction was conducted as the pre-treatment step to reduce the free fatty acid (FFA) content in used cooking oil in the first column. Subsequently, transesterification reaction as the main reaction to produce biodiesel was carried out in the second reactive distillation column. The simulation process of biodiesel production from used cooking oil using IDC-RD was performed with ASPEN Plus V10.0.

The formula for the transesterification reaction is exhibited in Equation 1.

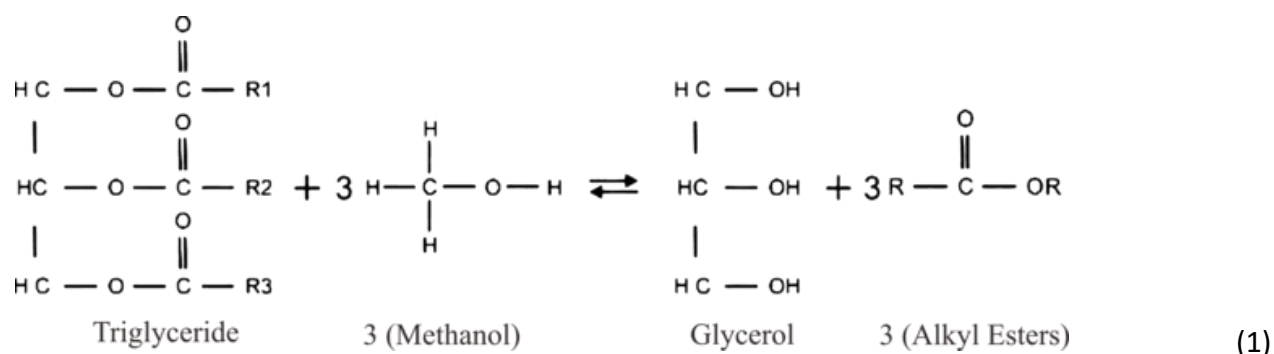

The feed-stock for biodiesel synthesis in this work was used cooking oil which contained 21.84% FFA and 78.16% triglycerides. Fatty acid composition of the raw material was presented in Table 1 [8].

Table 1
 Fatty Acid Composition of the Used Cooking Oil

Component	% mole
Palmitic Acid	1.4196
Linoleic Acid	8.3429
Oleic Acid	8.8452
Stearic Acid	0.3058
Linolenic Acid	2.9266
Tripalmitate	5.0804
Trilinoleate	29.8571
Trioleate	31.6548
Tristearat	1.0942
Trilinolenic	10.4734

The kinetics data of the esterification reaction taken from the literature can be seen on Table 2 [24].

Table 2
 Esterification reaction data of used cooking oil

Parameter	Collision Factor (A)	Activation Energy (Ea)
	$A_1^- = 128.8 / \text{minute}$	$Ea_1^- = 4.239 \text{ kJ/mole}$
	$A_1^+ = 1.307 \times 10^3 / \text{minute}$	$Ea_1^+ = 18.59 \text{ kJ/mole}$
T boiling point methanol	64.7°C	

The kinetics data of the transesterification reaction kinetics taken from the literature is demonstrated in Table 3 [25].

Table 3
 Data of used cooking oil transesterification reactions

Parameter	Collision Factor	Activation Energy
	$A_2 = 2.9 \times 10^7 / \text{minute}$	$Ea_2 = 53.99 \text{ kJ/mole}$
T boiling point methanol	64.7°C	

3. Results

In this study, an Integrated Double Column Reactive Distillation (IDC-RD) simulation has been performed. IDC-RD applied two column reactive distillations which integrated in one set of equipment to accomplish the esterification and transesterification processes consecutively. Esterification reaction of used cooking oil with methanol is a crucial step to reduce the high FFA content prior to the main transesterification reaction to produce biodiesel. The process flow simulation is shown in Figure 1. The Basic simulation and sensitivity analysis was performed to examine the effect of the reflux ratio, the methanol to oil ratio, and the bottom to feed ratio on the reaction conversion.

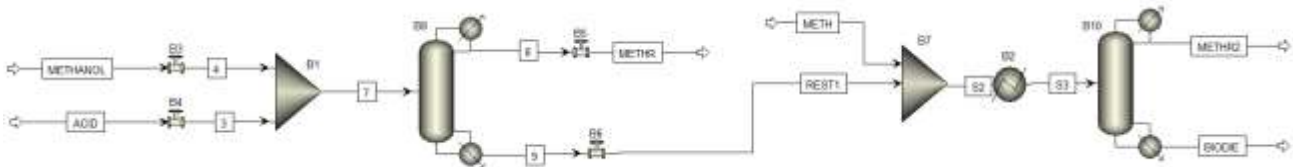


Fig. 1. Steady State Aspen Plus v10.0 Simulation Flowsheet of the IDC-RC of Biodiesel Production

3.1. Basic Simulation of Steady State Reactive Distillation (RD) Esterification Column

Esterification is a crucial step for reducing the FFA content prior to transesterification reaction in order to avoid the undesired saponification side reaction [26]. The main parameters of the IDC-RD for the esterification process were inputted into the Aspen Plus V10.0 using the radfrac type device. The basic simulation parameters were as follows: the number of stages was 5, the reaction zone was at stage 3, the input feed zone was at stage 2, the feed temperature was 60 °C, the pressure was set at the atmospheric pressure, the feed (oil to methanol) ratio was 1: 4, the bottom to feed ratio was 0.5, and the reflux ratio was 0.5. The results showed that the FFA, which was composed of oleic acid, linoleic acid, palmitic acid, stearic acid, and linolenic acid, decreased up to 96.59 % due to the reaction process with methanol. Those fatty acids were converted into methyl oleate, methyl linoleate, methyl palmitate, methyl stearic, and methyl linolenic acid, correspondingly. This result was considerably higher than the similar reaction conducted using the other types of biodiesel synthesis technology. Agustian *et al* [27] reported that the esterification of used cooking oil using ultrasonic reactor resulted in a conversion of 42.08%. Another study conducted by Mengyu *et al* [24] conveyed that the esterification of used cooking oil using conventional methods in the presence of Fe_2SO_4/C catalyst resulted in 96% conversion.

3.1.1. Effect of the Reflux Ratio on the FFA Conversion

Figure 2 displays the effect of the reflux ratio on the FFA conversion. The higher reflux ratio led to the higher FFA conversion. This was due to the fact that the higher reflux denoted the longer reaction time. It implied that more intensive contact between the reactant molecules, yielding the higher conversion. Based on sensitivity analysis, the optimum result was obtained at the reflux ratio of 25 with a FFA conversion of 98.95%.

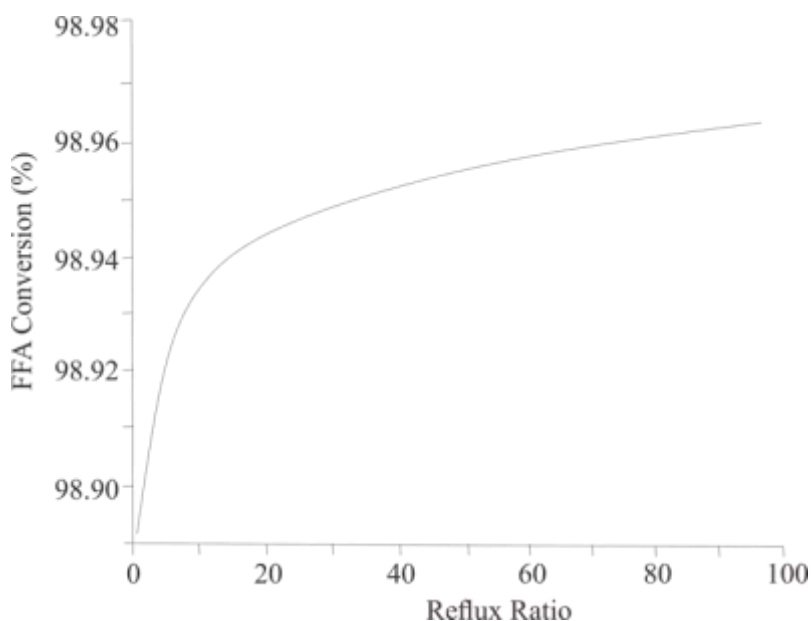


Fig. 2. The Effect of Reflux Ratio on the FFA Conversion

3.1.2. The Effect of the Feed Ratio on the FFA Conversion

Figure 3 reveals the effect of feed (methanol to oil) ratio on the FFA conversion. It was revealed that the higher methanol to oil ratio brought about the higher FFA conversion. This phenomenon occurred since the addition of the methanol will caused the excess of the reactant, which improved the reaction conversion. The result of the sensitivity analysis disclosed that the highest conversion was achieved at the methanol to oil ratio of 13, resulting in the FFA conversion of 99.591. This result was higher to a great extent compared to the conversion provided by the conventional reactor for the identical value of the reactant molar ratio.

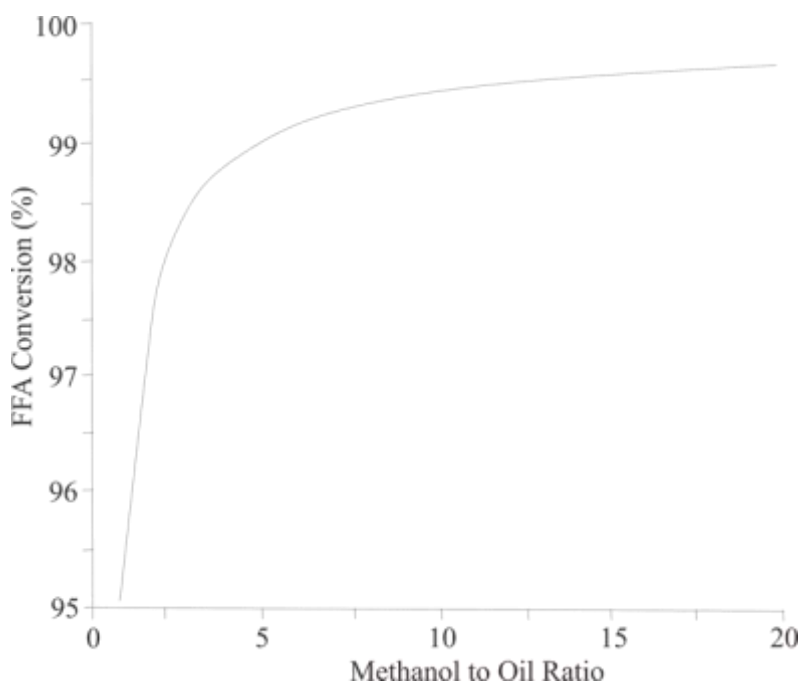


Fig. 3. The Effect of the Methanol to Oil Ratio on the FFA Conversion

3.1.3. The Effect of Bottom to Feed Ratio on FFA Conversion

Figure 4 indicates that the higher bottom to feed ratio led to the higher FFA conversion. This arose since the higher methanol concentration at the bottom will cause a high excess methanol to FFA. On the other hand, esterification is an equilibrium limited reaction, where the far excess reactant will shift the reaction towards the product formation and precede a higher conversion. Based on sensitivity analysis, the optimum result was obtained at a bottom to feed ratio of 0.75 with a conversion of 98.828%.

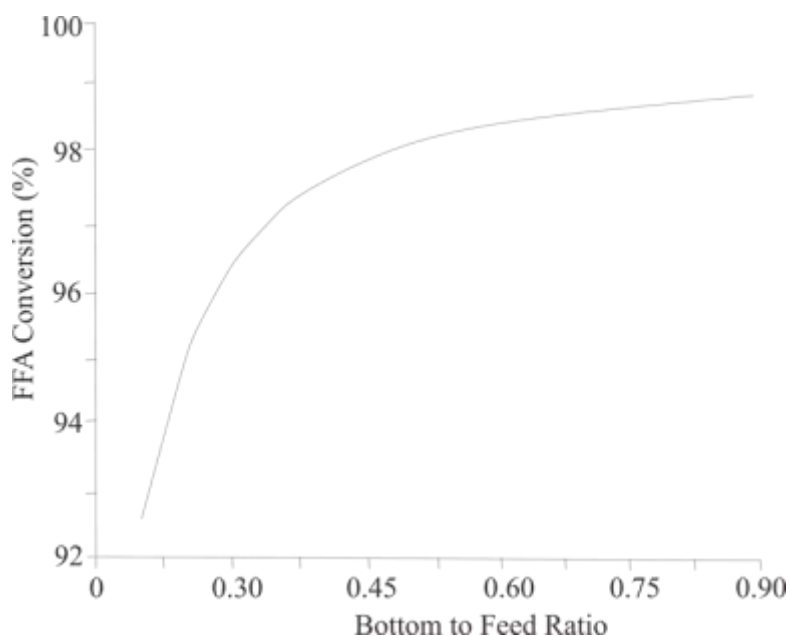


Fig. 4. The Effect of Bottom to Feed Ratio on the FFA Conversion

3.2. Basic Simulation of Steady State Reactive Distillation (RD) Transesterification Column

The main parameters were inputted into the Aspen Plus V10.0 using the radfrac type device. The basic simulation parameters set up were as follows: the number of stages was 5, the reaction zone was at stage 3, feed point location was at stage 2, the feed temperature was 65°C, the operation was conducted at the atmospheric pressure, the feed ratio of oil to methanol was 1: 3, the bottom to feed ratio was 0.5, and the reflux ratio was 0.5. The results exhibited that triglycerides in the form of tripalmitin, tristearin, triolein, trilinolein, and trilinolenin reacted with methanol almost completely. The conversion attained in the transesterification reaction using IDC-RD was 99.98%. It was notably superior compared to those resulted using conventional method and ultrasonic reactor which were 53.6% [28] and 92% [29].

3.2.1. The Effect of Reflux Ratio on Triglyceride Conversion

Figure 5 discloses the effect of reflux ratio on triglyceride conversion. It can be observed that the higher reflux ratio enhanced the triglyceride conversion. This fact occurred since more reflux generated a longer contact between the reactants, leading to the higher reaction conversion.

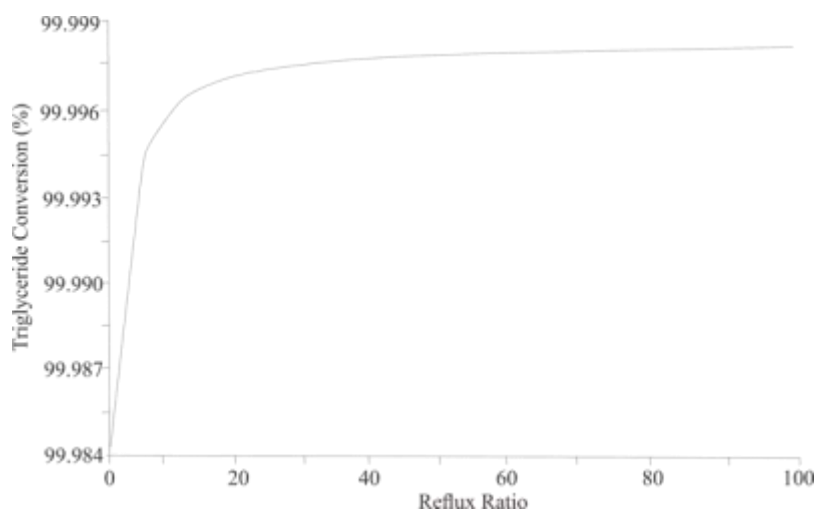


Fig. 5. The Effect of Reflux Ratio on Triglyceride Conversion

3.2.2. The Effect of Methanol-Oil Ratio on Triglyceride Conversion

The effect of feed (methanol to oil) ratio on the triglyceride conversion was disclosed in Figure 6. The simulation show that the higher methanol to oil ratio promoted the triglyceride conversion. This was attributable to the fact that the higher excess of reactant will drive the equilibrium-limited reaction to right, affording a higher reaction conversion.

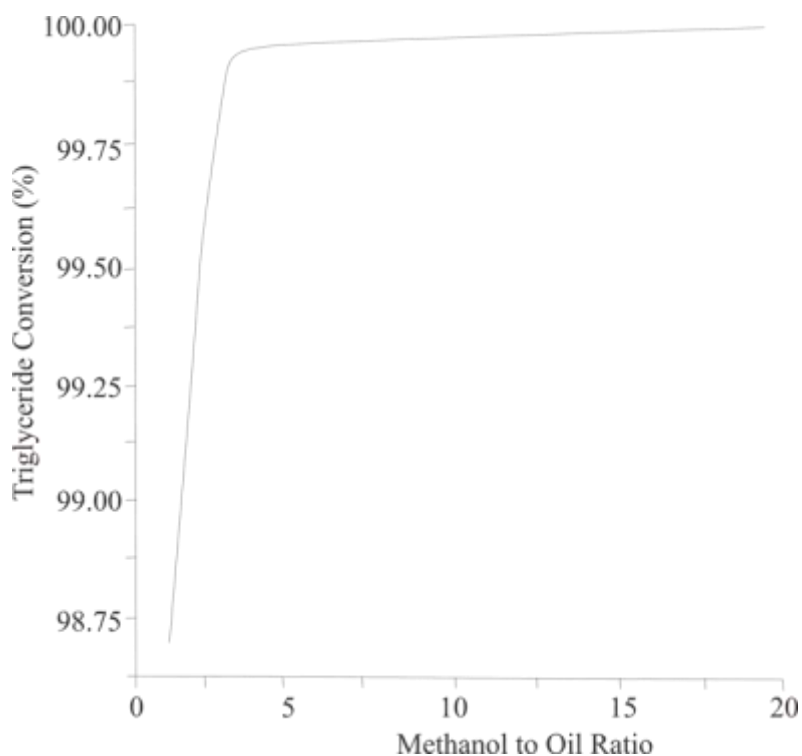


Fig. 6. The Effect of the Feed (Methanol-Oil Ratio) on Triglyceride Conversion

3.2.3. Effect of Bottom to Feed Ratio on Triglyceride Conversion

Figure 7 shows that the higher bottom to feed ratio leads to the lower triglyceride conversion in the transesterification. This was because the higher bottom to feed ratio initiated the less reflux ratio in the distillate, thus reducing the conversion.

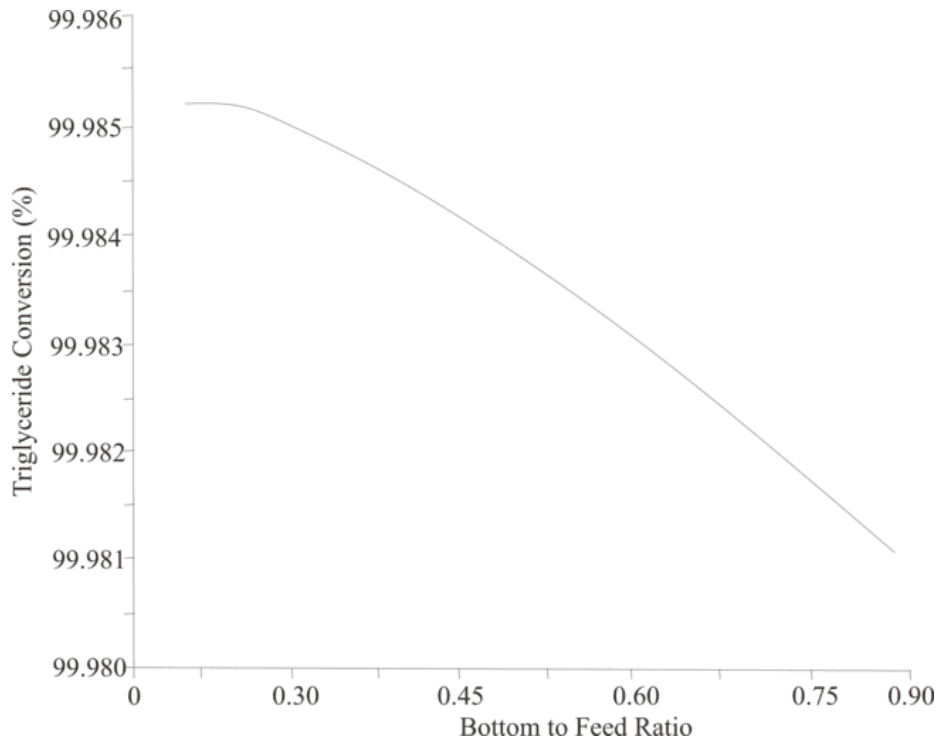


Fig. 7. The Effect of the Bottom to Feed Ratio on the Triglyceride Conversion

4. Conclusions

Based on the results of the steady state simulation study of Integrated Double Column Reactive Distillation (IDC-RC) esterification and transesterification of used cooking oil into biodiesel using Aspen Plus V10 software, it can be inferred as follows. The basic simulation of FFA esterification process of used cooking oil using IDC-RD provided a conversion of 96.59 % with a reflux ratio of 0.5, a bottom to feed ratio of 0.5, and a feed methanol-oil ratio of 4: 1. The effect of each parameter was evaluated independently using sensitivity analysis. The sensitivity analysis revealed that the higher reflux ratio, methanol to oil ratio, and bottom to feed ratio increased the FFA conversion. It was also discovered that esterification using a reflux ratio of 25 resulted in a conversion of 98.95%, a bottom to feed ratio of 0.75 gave a conversion of 98.828%, and a feed (methanol to oil) ratio of 13: 1 contributed to the conversion of 99.591%. The second column was assigned for the transesterification reaction. The basic simulation on the transesterification process of used cooking oil on IDC-RD denoted a conversion of 99.98% with a reflux ratio of 0.5, a bottom to feed ratio of 0.5, and a feed methanol-oil ratio of 3: 1. However, the results of sensitivity analysis on the IDC-RD transesterification demonstrated that changing of the process parameter slightly influenced the reaction conversion since a high conversion has been reach using basic parameter condition.

Acknowledgement

The funding resource from the Directorate of Research and Community Service – Ministry of Research, Technology and Higher Education (*DRPM – Kemenristekdikti*) through the Hibah Pasca Doktor Grant with the contract number of 078/SP2H/LT/DRPM/2019 (internal contract number of 15.18.3/UN37/ PPK.3.1/2019).

References

- [1] Heyko, Eduardo, Zamruddin Hasid, and Priyagus Priyagus. "Strategi Pemanfaatan Energi Terbarukan Dalam Rangka Kemandirian Energi Daerah Provinsi Kalimantan Timur." *Ekonomi Keuangan, Dan Manajemen* 12, no. 1 (2016): 1–28.
- [2] BPS. *Statistik Kelapa Sawit Indonesia 2018*. Edited by Sub-Directorate of Estate Crops Statistics. 1st ed. Vol. 1. Jakarta: BPS-Statistics Indonesia, 2019.
- [3] Noshadi, I, N A S Amin, and Richard S Parnas. "Continuous Production of Biodiesel from Waste Cooking Oil in a Reactive Distillation Column Catalyzed by Solid Heteropolyacid: Optimization Using Response Surface Methodology (RSM)." *Fuel* 94 (2012): 156–64. <https://doi.org/10.1016/j.fuel.2011.10.018>.
- [4] Jaat, Norrizam, Amir Khalid, Norrizal Mustaffa, Fathul Hakim Zulkifli, Norshuhaila Mohamed Sunar, Ridwan Saputra Nursal, Mahmud Abd Hakim Mohamad, and Djamal Didane. "Analysis of Injection Pressure and High Ambient Density of Biodiesel Spray Using Computational Fluid Dynamics." *CFD Letters* 11, no. 1 (2019): 28–39.
- [5] EBTKE. "Kiprah Biodiesel Dalam Mendukung Pengembangan Energi Baru Terbarukan : Capaian Program B30 Pada Semester I 2021." Article, 2021.
- [6] Hayder, G, P Puniyarsen, and Putrajaya Campus. "Identification and Evaluation of Wastes from Biodiesel Production Process." *Journal of Advanced Research in Applied Sciences and Engineering Technology* 3, no. 1 (2016): 21–29.
- [7] Kusumaningtyas, Ratna Dewi, Prima Astuti Handayani, Rochmadi, Suryo Purwono, and Arief Budiman. "Tin (II) Chloride Catalyzed Esterification of High Ffa Jatropha Oil: Experimental and Kinetics Study." *International Journal of Renewable Energy Development* 3, no. 2 (2014): 75–81. <https://doi.org/10.14710/ijred.3.2.75-81>.
- [8] Jain, Siddharth, M P Sharma, and Shalini Rajvanshi. "Acid Base Catalyzed Transesterification Kinetics of Waste Cooking Oil." *Fuel Processing Technology* 92, no. 1 (2011): 32–38. <https://doi.org/10.1016/j.fuproc.2010.08.017>.
- [9] Kumar, Mukesh, and M P Sharma. "Assessment of Potential of Oils for Biodiesel Production." *Renewable and Sustainable Energy Reviews* 44 (2015): 814–23. <https://doi.org/10.1016/j.rser.2015.01.013>.
- [10] Valente, Osmano Souza, Vanya Márcia Duarte Pasa, Carlos Rodrigues Pereira Belchior, and José Ricardo Sodr . "Physical–Chemical Properties of Waste Cooking Oil Biodiesel and Castor Oil Biodiesel Blends." *Fuel* 90, no. 4 (2011): 1700–1702. <https://doi.org/https://doi.org/10.1016/j.fuel.2010.10.045>.
- [11] Elangovan, T., G. Anbarasu, and L. Jeryraj Kumar. "Development of Calophyllum Inophyllum Biodiesel and Analysis of Its Properties at Different Blends." *International Journal of ChemTech Research* 9, no. 4 (2016): 220–29. <https://doi.org/10.1016/j.matpr.2020.02.546>
- [12] T.I, Olasheu, Adebiyi K.A, Durowoju M.O, and Odesanya K.O. "Determination of Some Physical Properties of Jatropha (Jatropha Curcas) Oil." *International Journal of Engineering Research* 4, no. 6 (2015): 331–38. <https://doi.org/10.17950/ijer/v4s6/612>.
- [13] Hanafie, Ahmad, Andi Haslinah, Qalaman Qalaman, and Akbar Made. "Permodelan Karakteristik Biodiesel Dari Minyak Jelantah." *ILTEK : Jurnal Teknologi* 12, no. 02 (2019): 1775–79. <https://doi.org/10.47398/iltek.v12i02.89>.
- [14] Kusumaningtyas, Ratna Dewi, Haniif Prasetiawan, Brylian Rizky Pratama, Dani Prasetya, and Anwaruddin Hisyam. "Esterification of Non-Edible Oil Mixture in Reactive Distillation Column over Solid Acid Catalyst: Experimental and Simulation Study." *Journal of Physical Science* 29, no. li (2018): 212–26. <https://doi.org/10.21315/jps2018.29.s2.17>.
- [15] Kumar, Ashwani, and Satyawati Sharma. "Potential Non-Edible Oil Resources as Biodiesel Feedstock: An Indian Perspective." *Renewable and Sustainable Energy Reviews* 15, no. 4 (2011): 1791–1800. <https://doi.org/10.1016/j.rser.2010.11.020>.
- [16] Oo, Ye Min, Makatar Wae-hayee, and Chayut Nuntadusit. "Experimental and Numerical Study on the Effect of Teardrop Dimple / Protrusion Spacing on Flow Structure and Heat Transfer Characteristics" *International Journal of Heat and Mass Transfer* 1, no. 1 (2020): 17–32.

- <https://doi.org/10.1016/j.ijheatmasstransfer.2015.01.055>
- [17] Alawi, Omer A, and Haslinda Mohamed Kamar. "Performance of Solar Thermal Collector Using Multi-Walled Carbon Nanotubes : Simulation Study" 1, no. 1 (2020): 12–21.
- [18] Mat Taib, Norhidayah, Mohd Radzi Abu Mansor, and Wan Mohd Faizal Wan Mahmood. "Simulation of Hydrogen Combustion in Neon-Oxygen Compression Ignition Engine." *CFD Letters* 12, no. 12 (2020): 1–16. <https://doi.org/10.37934/cfdl.12.12.116>.
- [19] Kadhim Sharaf, Hussein, Nawal Aswan, Abdul Jalil, and Sadeq Salman. "A Simulation on the Effect of Ultrasonic Vibration on Ultrasonic Assisted Soldering of Cu/SAC305/Cu Joint." *Journal of Advanced Research in Applied Mechanics Journal Homepage* 36, no. 1 (2017): 1–9. <https://doi.org/10.1016/j.ultsonch.2016.06.039>
- [20] Souza, Thibério P C, Luiz Stragevitch, Augusto Knoechelmann, Jose G A Pacheco, and Jose M F Silva. "Simulation and Preliminary Economic Assessment of a Biodiesel Plant and Comparison with Reactive Distillation." *Fuel Processing Technology* 123 (2014): 75–81. <https://doi.org/10.1016/j.fuproc.2014.02.004>.
- [21] Smejkal, Q, and M Šoóš. "Comparison of Computer Simulation of Reactive Distillation Using Aspen plus and Hysys Software." *Chemical Engineering and Processing: Process Intensification* 41, no. 5 (2002): 413–18. [https://doi.org/10.1016/S0255-2701\(01\)00160-X](https://doi.org/10.1016/S0255-2701(01)00160-X).
- [22] Pirola, Carlo, Federico Galli, Michele Corbetta, and Flavio Manenti. "Robust Kinetic Modeling of Heterogeneously Catalyzed Free Fatty Acids Esterification in Monophasic Liquid/Solid Packed Bed Reactor: Rival Model Discrimination." *Clean Technologies and Environmental Policy* 17, no. 5 (2015): 1139–47. <https://doi.org/10.1007/s10098-015-0925-x>.
- [23] Gerbaud, Vincent, and Ivonne Rodriguez-Donis. *Advances in Extractive Distillation. Reference Module in Chemistry, Molecular Sciences and Chemical Engineering*. Elsevier Inc., 2019. <https://doi.org/10.1016/b978-0-12-409547-2.05949-7>.
- [24] GAN, Mengyu, Deng PAN, Li MA, En YUE, and Jianbing HONG. "The Kinetics of the Esterification of Free Fatty Acids in Waste Cooking Oil Using Fe₂(SO₄)₃/C Catalyst." *Chinese Journal of Chemical Engineering* 17, no. 1 (2009): 83–87. [https://doi.org/10.1016/S1004-9541\(09\)60037-9](https://doi.org/10.1016/S1004-9541(09)60037-9).
- [25] Talebian-Kiakalaieh, Amin, Nor Aishah Saidina Amin, Alireza Zarei, and Iman Noshadi. "Transesterification of Waste Cooking Oil by Heteropoly Acid (HPA) Catalyst: Optimization and Kinetic Model." *Applied Energy* 102 (2013): 283–92. <https://doi.org/https://doi.org/10.1016/j.apenergy.2012.07.018>.
- [26] Kusumaningtyas, Ratna Dewi, Naomi Ratrianti, Indah Purnamasari, and Arief Budiman. "Kinetics Study of Jatropha Oil Esterification with Ethanol in the Presence of Tin (II) Chloride Catalyst for Biodiesel Production." *AIP Conference Proceedings* 1788, no. 1 (January 2017): 30086. <https://doi.org/10.1063/1.4968339>.



Ratna Dewi Kusumaningtyas <ratnadewi.kusumaningtyas@mail.unnes.ac.id>

[J. Adv. Res. Fluid Mech. Therm. Sc.] Editor Decision

Nor Azwadi <azwadi@semarakilmu.com.my>

Sun, Nov 7, 2021 at 6:23 AM

To: Ratna Dewi Kusumaningtyas <ratnadewi.kusumaningtyas@mail.unnes.ac.id>

Ratna Dewi Kusumaningtyas:

We have reached a decision regarding your submission to Journal of Advanced Research in Fluid Mechanics and Thermal Sciences, "EIC-Biodiesel Production from Used Cooking Oil Using Integrated Double Column Reactive Distillation: Simulation Study".

Our decision is to: Accept Submission

Thank you

Truly

Editor-in-chief, Journal of Advanced Research in Fluid Mechanics and Thermal Sciences

[Journal of Advanced Research in Fluid Mechanics and Thermal Sciences](#)

Notifications**[J. Adv. Res. Fluid Mech. Therm. Sc.] Editor Decision**

2021-11-06 11:23 PM

Ratna Dewi Kusumaningtyas:

We have reached a decision regarding your submission to Journal of Advanced Research in Fluid Mechanics and Thermal Sciences, "EIC-Biodiesel Production from Used Cooking Oil Using Integrated Double Column Reactive Distillation: Simulation Study".

Our decision is to: Accept Submission

Thank you

Truly

Editor-in-chief, Journal of Advanced Research in Fluid Mechanics and Thermal Sciences

[Journal of Advanced Research in Fluid Mechanics and Thermal Sciences](https://semarakilmu.com.my/journals/index.php/fluid_mechanics_thermal_sciences)

Notifications**[J. Adv. Res. Fluid Mech. Therm. Sc.] Editor Decision**

2021-11-06 11:23 PM

Ratna Dewi Kusumaningtyas:

We have reached a decision regarding your submission to Journal of Advanced Research in Fluid Mechanics and Thermal Sciences, "EIC-Biodiesel Production from Used Cooking Oil Using Integrated Double Column Reactive Distillation: Simulation Study".

Our decision is to: Accept Submission

Thank you

Truly

Editor-in-chief, Journal of Advanced Research in Fluid Mechanics and Thermal Sciences

[Journal of Advanced Research in Fluid Mechanics and Thermal Sciences](https://semarakilmu.com.my/journals/index.php/fluid_mechanics_thermal_sciences)

Notifications**[J. Adv. Res. Fluid Mech. Therm. Sc.] Editor Decision**

2022-04-26 04:16 AM

Ratna Dewi Kusumaningtyas:

The editing of your submission, "EIC-Biodiesel Production from Used Cooking Oil Using Integrated Double Column Reactive Distillation: Simulation Study," is complete. We are now sending it to production. Kindly refer the copy-edited manuscript for your perusal.

In addition, please provide the email addresses of all authors in order for us to complete the system database prior to publication.

Submission URL:

https://semarakilmu.com.my/journals/index.php/fluid_mechanics_thermal_sciences/authorDashboard

[Journal of Advanced Research in Fluid Mechanics and Thermal Sciences](#)

Notifications**[J. Adv. Res. Fluid Mech. Therm. Sc.] Editor Decision**

2022-04-26 04:16 AM

Ratna Dewi Kusumaningtyas:

The editing of your submission, "EIC-Biodiesel Production from Used Cooking Oil Using Integrated Double Column Reactive Distillation: Simulation Study," is complete. We are now sending it to production. Kindly refer the copy-edited manuscript for your perusal.

In addition, please provide the email addresses of all authors in order for us to complete the system database prior to publication.

Submission URL:

https://semarakilmu.com.my/journals/index.php/fluid_mechanics_thermal_sciences/authorDashboard

[Journal of Advanced Research in Fluid Mechanics and Thermal Sciences](https://semarakilmu.com.my/journals/index.php/fluid_mechanics_thermal_sciences)



Biodiesel Production from Used Cooking Oil Using Integrated Double Column Reactive Distillation: Simulation Study

Ratna Dewi Kusumaningtyas^{1,*}, Andre Dianata Hogi Kusuma¹, Yoshua Wira Putra Budiono¹, Haniif Prasetiawan¹, Pragusti Lintang Adhi Nanggala¹, I Istadi²

¹ Chemical Engineering Department, Faculty of Engineering, Universitas Negeri Semarang Sekaran, Gunungpati, Semarang 50229 Indonesia

² Department of Chemical Engineering, Diponegoro University, Jln. Prof. Soedarto, Kampus UNDIP Tembalang, Semarang, Central Java, 50275 Indonesia

ARTICLE INFO

Article history:

Received 10 November 2021

Received in revised form 6 March 2022

Accepted 9 March 2022

Available online

Keywords:

Reactive distillation; Biodiesel;
Simulation; Aspen; UNIQUAC

ABSTRACT

Dependency on fossil – based energy has become a global problem. Indonesia has started a movement in changing energy sources from fossil to new and renewable energy. Biodiesel is one of the renewable energy sources. Used cooking oil is one of the prospective feed-stock in biodiesel production. Used cooking oil contains 21.84% free fatty acid and 78.16% triglycerides. This study simulated the production of biodiesel from used cooking oil using the Aspen Plus v10 software. The production system used an Integrated Double Column Reactive Distillation (IDC-RD) system. The thermodynamic method employed in the simulation system was UNIQUAC. This study used the sensitivity analysis function in the Aspen Plus v10 application to analyze the effect of reflux ratio, the bottom to feed ratio, and the methanol to oil ratio on the reaction conversion. The reflux ratio applied in the simulation was 0.5 – 200, the bottom to feed ratio was 0.25 - 0.9, and the methanol to oil ratio was 1: 3 - 9:8. It was found that the esterification column with a reflux ratio of 0.5, a bottom to feed ratio of 0.5, and a methanol-oil ratio of 4: 1 resulted in a conversion of 96.59%. It was also demonstrated that the transesterification column with a reflux ratio of 0.5, a bottom to feed ratio of 0.5, and a methanol-oil ratio of 3: 1 resulted in a conversion of 99.98%.

1. Introduction

The availability of fossil energy, especially crude oil in Indonesia, has become increasingly scarce, causing Indonesia to become an importer of crude oil and its derivative products [1]. Based on data from the Indonesian Central Statistics Agency [2], it was stated that in 1996 Indonesia's oil imports amounted to 10.6893 million tons and in 2018 Indonesia's oil imports increased to 26.7371 million tons. Meanwhile, oil exports in Indonesia in 1996 amounted to 10.1338 million tons and in 2018 decreased to 3.1221 million tons. This shows that Indonesia experienced an oil balance surplus in 1996 of 555.5 thousand tons, while it experienced an oil balance deficit in 2018 of 23.615 million tons.

* Corresponding author.

E-mail address: ratnadewi.kusumaningtyas@mail.unnes.ac.id

<https://doi.org/10.37934/arfmts.94.1.XX>

The increase in energy demand caused by the high rate of economic growth and population growth coupled with the depletion of world oil reserves and the problem of gas emissions caused by excess fossil fuels are strong reasons for every country to immediately develop and utilize renewable alternative energy. This alternative energy has advantages when compared to fossil energy currently in use, namely that it will not run out if it is managed properly and is environmentally friendly, one of which is biodiesel [3]. Based on the environmental perspective, biodiesel is an interesting renewable energy to be widely applied since it is non-toxic, has a low aromatic content, and releases lower greenhouse gases such as unburned hydrocarbon, carbon monoxide, and particulate matters [4].

Indonesia has created a new policy to address the problem of fossil energy and its increasing energy needs. The new national energy policy is regulated in Government Regulation No. 79/2014. The new regulation set a target for Indonesia's new and renewable energy target in 2025 which is 23% of the total national energy. One of the ways for Indonesian government to achieve the target of new and renewable energy is by issuing a mandatory policy of B30 (Biodiesel 30%) [5]. In addition to B30, the Government is starting to develop in achieving the B100 (Biodiesel 100%) program.

Biodiesel is an alternative diesel engine fuel which consists of a mixture of fatty acid alkyl esters. Biodiesel can be produced through transesterification reactions of triglycerides contained in animal fats and plant oils with light alcohol and the presence of alkaline or acid catalysts. The reaction results in biodiesel as main product and glycerine as the by-product [6]. The direct transesterification process cannot be applied when the oil raw materials used contain high *free fatty acids* (FFA) (> 2%). In the transesterification reaction, the FFA content in the raw material must be lower than 1-2% to avoid lathering reaction between FFA and alcohol which can result in increased catalyst consumption, reduce biodiesel yield, and inhibit product separation [7]. Esterification reaction must be done to reduce FFA levels by reacting FFA with alcohol.

The materials for producing biodiesel from vegetable oil consist of used cooking oil, *Calophyllum inophyllum* oil, castor oil, and many more. Used cooking oil has FFA levels of 21.84% [8], *Calophyllum inophyllum* oil and castor oil have 39% and 19.8%, respectively [9]. Biodiesel cannot have high viscosity because it will damage and interfere with engine performance so that in the selection of raw materials, viscosity is a major consideration. The viscosity of used cooking oil, *Calophyllum inophyllum* oil, and castor oil is 30 cst [10], 38.17 cst [11], and 162.8 cst [12], respectively. Used cooking oil compared to *Calophyllum inophyllum* oil and castor oil has more advantages in viscosity and FFA in used cooking oil is lower than that of *Calophyllum inophyllum* oil so that used cooking oil is suitable as a raw material for making biodiesel.

Used cooking oil is an alternative material that can be used as an ingredient for making biodiesel which can minimize environmental pollution due to the free and unmanaged disposal of used cooking oil. If left unchecked and prevented immediately, there will be a pile of carcinogenic waste oil which is detrimental for health and can also cause poisoning in the body [13]. Therefore, used cooking oil should be recycled and used as raw material for producing biodiesel. Used cooking oil production is related to the total consumption of palm oil in Indonesia. In 2018, there were 12.2 million tonnes of oil consumed domestically.

There are several advanced biodiesel manufacturing processes such as reactive distillation (RD) and ionic liquid (IL) application. The use of Ionic Liquid has disadvantages for its expensive price of Ionic Liquid and the long reaction time. On the other hand, reactive distillation integrates reaction and separation in one unit column [14]. It has advantages since it needs a small ratio of oil alcohol, low operating temperature, lower costs, less waste products, low reactant costs, increased

conversion through product removal, and useful to limit the azeotropic conditions in the column [15].

There are some parameters that affect the performance of the reactive distillation for biodiesel production. Modeling and simulation is often used for determining the effect of main parameters on the biodiesel conversion to reduce the number of experimental investigation which is usually costly. Modeling, simulation and numerical method are widely applied in engineering area. Many work related to the simulation using various tools have been reported in literature [16,17,18,19].


In this work, reactive distillation simulation was conducted using Aspen Plus software version 10.0 in a steady state condition. Souza *et al.*, [20] have optimized the process of making biodiesel using HYSYS v7.2 resulting in an increase in conversion of 18% and an error of 3.2%. Smejkal *et al.*, [21] has made a comparison between simulation using Aspen Plus and Hysys in the reactive distillation system. It was found that the error produced by Aspen Plus and Hysys were 1.2% and 2.8%, respectively. Based on the error parameter and the description above, Aspen Plus has more advantages in simulating the reactive distillation process. Therefore, in this work, Aspen Plus was employed for the simulation of reactive distillation to produce biodiesel. Process simulation is urgent for designing processing equipment to scale up and predict tool performance on an industrial scale. In this simulation, process optimization was carried out using the sensitivity analysis feature on the variable reflux ratio (RR), feed ratio (FR), feed stage (FS), and distillate rate (DR).

The thermodynamic model used in this study was the UNIQUAC model which was rarely used in other literature. The UNIQUAC model is more suitable for calculating the non-ideal characteristic of the liquid mixture such as the system in biodiesel synthesis [22]. Çağatay and Karacan [23] cagatay have performed a simulation using reactive distillation and heterogeneous catalysts for biodiesel production using used cooking oil as raw material. However, the system used in the research was a single column which only involved a transesterification reaction while the esterification as pre-treatment step was carried out separately. This study offered a novelty in biodiesel manufacturing process technology which was Integrated Double Column Reactive Distillation (IDC-RD). IDC-RD used a two column reactive distillation system which integrated the esterification and transesterification processes in one set of equipment to produce biodiesel with a more optimal yield. This work revealed the effect of the main parameters on biodiesel manufacturing process using IDC-RD which will be useful for process design and scale-up.

2. Methodology

In this work, an integrated double column reactive distillation (IDR-RC) was applied to produce biodiesel. Two reactions, namely esterification and transesterification reactions, were performed consecutively in the two reactive distillation column. The esterification reaction was conducted as the pre-treatment step to reduce the free fatty acid (FFA) content in used cooking oil in the first column. Subsequently, transesterification reaction as the main reaction to produce biodiesel was carried out in the second reactive distillation column. The simulation process of biodiesel production from used cooking oil using IDC-RD was performed with ASPEN Plus V10.0.

The formula for the transesterification reaction is exhibited in Eq. (1).

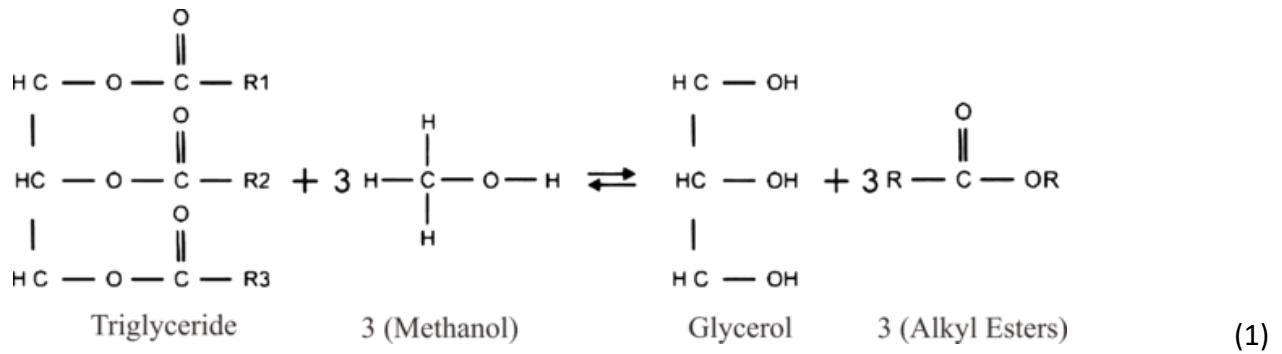

The feed-stock for biodiesel synthesis in this work was used cooking oil which contained 21.84% FFA and 78.16% triglycerides. Fatty acid composition of the raw material was presented in Table 1 [8].

Table 1
 Fatty Acid Composition of the Used Cooking Oil

Component	% mole
Palmitic Acid	1.4196
Linoleic Acid	8.3429
Oleic Acid	8.8452
Stearic Acid	0.3058
Linolenic Acid	2.9266
Tripalmitate	5.0804
Trilinoleate	29.8571
Trioleate	31.6548
Tristearat	1.0942
Trilinolenic	10.4734

The kinetics data of the esterification reaction taken from the literature can be seen on Table 2 [24].

Table 2
 Esterification reaction data of used cooking oil

Parameter	Collision Factor (A)	Activation Energy (Ea)
	$A_1^- = 128.8 / \text{minute}$	$Ea_1^- = 4.239 \text{ kJ/mole}$
	$A_1^+ = 1.307 \times 10^3 / \text{minute}$	$Ea_1^+ = 18.59 \text{ kJ/mole}$
T boiling point methanol	64.7°C	

The kinetics data of the transesterification reaction kinetics taken from the literature is demonstrated in Table 3 [25].

Table 3
 Data of used cooking oil transesterification reactions

Parameter	Collision Factor	Activation Energy
	$A_2 = 2.9 \times 10^7 / \text{minute}$	$Ea_2 = 53.99 \text{ kJ/mole}$
T boiling point methanol	64.7°C	

3. Results

In this study, an Integrated Double Column Reactive Distillation (IDC-RD) simulation has been performed. IDC-RD applied two column reactive distillations which integrated in one set of equipment to accomplish the esterification and transesterification processes consecutively. Esterification reaction of used cooking oil with methanol is a crucial step to reduce the high FFA content prior to the main transesterification reaction to produce biodiesel. The process flow simulation is shown in Figure 1. The Basic simulation and sensitivity analysis was performed to examine the effect of the reflux ratio, the methanol to oil ratio, and the bottom to feed ratio on the reaction conversion.

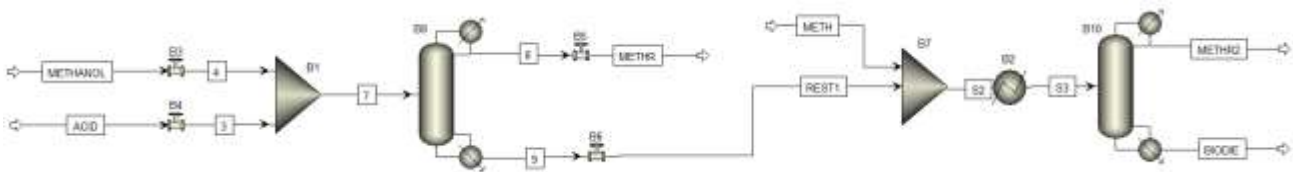


Fig. 1. Steady State Aspen Plus v10.0 Simulation Flowsheet of the IDC-RC of Biodiesel Production

3.1 Basic Simulation of Steady State Reactive Distillation (RD) Esterification Column

Esterification is a crucial step for reducing the FFA content prior to transesterification reaction in order to avoid the undesired saponification side reaction [26]. The main parameters of the IDC-RD for the esterification process were inputted into the Aspen Plus V10.0 using the radfrac type device. The basic simulation parameters were as follows: the number of stages was 5, the reaction zone was at stage 3, the input feed zone was at stage 2, the feed temperature was 60 °C, the pressure was set at the atmospheric pressure, the feed (oil to methanol) ratio was 1: 4, the bottom to feed ratio was 0.5, and the reflux ratio was 0.5. The results showed that the FFA, which was composed of oleic acid, linoleic acid, palmitic acid, stearic acid, and linolenic acid, decreased up to 96.59 % due to the reaction process with methanol. Those fatty acids were converted into methyl oleate, methyl linoleate, methyl palmitate, methyl stearic, and methyl linolenic acid, correspondingly. This result was considerably higher than the similar reaction conducted using the other types of biodiesel synthesis technology. Agustian *et al.*, [27] reported that the esterification of used cooking oil using ultrasonic reactor resulted in a conversion of 42.08%. Another study conducted by Mengyu *et al.*, [24] conveyed that the esterification of used cooking oil using conventional methods in the presence of Fe_2SO_4/C catalyst resulted in 96% conversion.

3.1.1 Effect of the reflux ratio on the FFA conversion

Figure 2 displays the effect of the reflux ratio on the FFA conversion. The higher reflux ratio led to the higher FFA conversion. This was due to the fact that the higher reflux denoted the longer reaction time. It implied that more intensive contact between the reactant molecules, yielding the higher conversion. Based on sensitivity analysis, the optimum result was obtained at the reflux ratio of 25 with a FFA conversion of 98.95%.

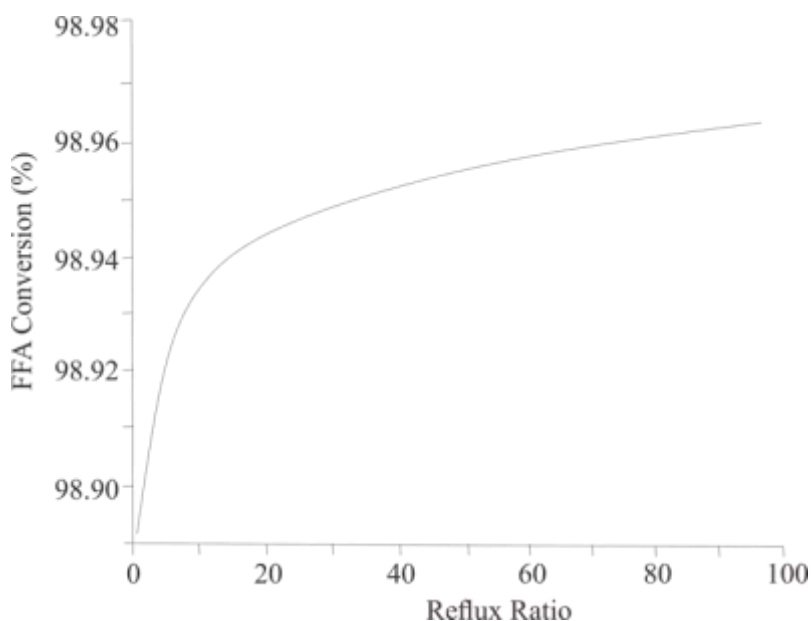


Fig. 2. The Effect of Reflux Ratio on the FFA Conversion

3.1.2 The effect of the feed ratio on the FFA conversion

Figure 3 reveals the effect of feed (methanol to oil) ratio on the FFA conversion. It was revealed that the higher methanol to oil ratio brought about the higher FFA conversion. This phenomenon occurred since the addition of the methanol will caused the excess of the reactant, which improved the reaction conversion. The result of the sensitivity analysis disclosed that the highest conversion was achieved at the methanol to oil ratio of 13, resulting in the FFA conversion of 99.591. This result was higher to a great extent compared to the conversion provided by the conventional reactor for the identical value of the reactant molar ratio.

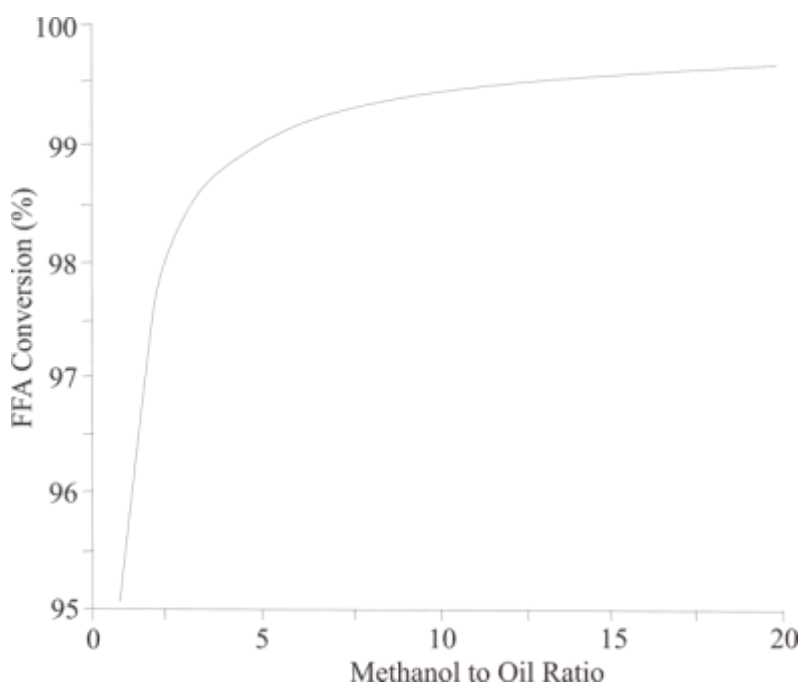


Fig. 3. The Effect of the Methanol to Oil Ratio on the FFA Conversion

3.1.3 The Effect of Bottom to Feed Ratio on FFA Conversion

Figure 4 indicates that the higher bottom to feed ratio led to the higher FFA conversion. This arose since the higher methanol concentration at the bottom will cause a high excess methanol to FFA. On the other hand, esterification is an equilibrium limited reaction, where the far excess reactant will shift the reaction towards the product formation and precede a higher conversion. Based on sensitivity analysis, the optimum result was obtained at a bottom to feed ratio of 0.75 with a conversion of 98.828%.

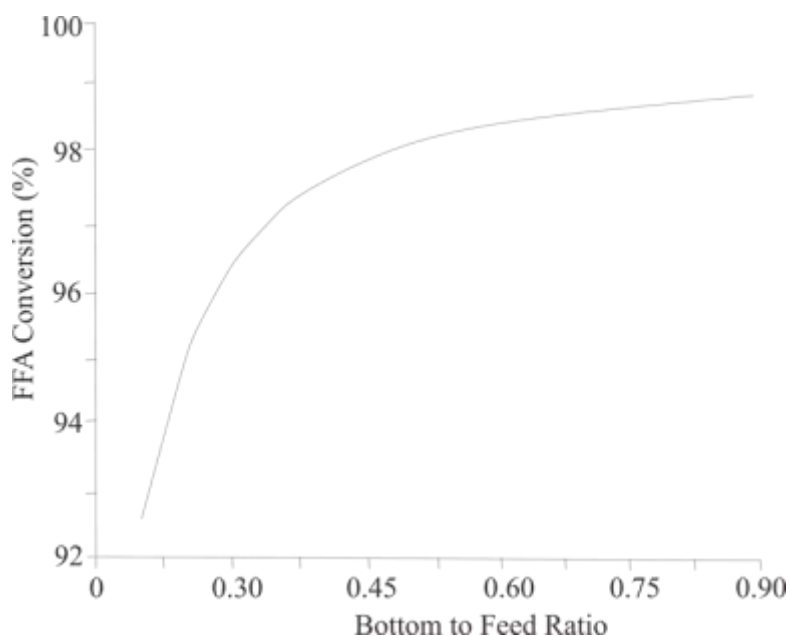


Fig. 4. The Effect of Bottom to Feed Ratio on the FFA Conversion

3.2 Basic Simulation of Steady State Reactive Distillation (RD) Transesterification Column

The main parameters were inputted into the Aspen Plus V10.0 using the radfrac type device. The basic simulation parameters set up were as follows: the number of stages was 5, the reaction zone was at stage 3, feed point location was at stage 2, the feed temperature was 65°C, the operation was conducted at the atmospheric pressure, the feed ratio of oil to methanol was 1: 3, the bottom to feed ratio was 0.5, and the reflux ratio was 0.5. The results exhibited that triglycerides in the form of tripalmitin, tristearin, triolein, trilinolein, and trilinolenin reacted with methanol almost completely. The conversion attained in the transesterification reaction using IDC-RD was 99.98%. It was notably superior compared to those resulted using conventional method and ultrasonic reactor which were 53.6% [28] and 92% [29].

3.2.1 The effect of reflux ratio on triglyceride conversion

Figure 5 discloses the effect of reflux ratio on triglyceride conversion. It can be observed that the higher reflux ratio enhanced the triglyceride conversion. This fact occurred since more reflux generated a longer contact between the reactants, leading to the higher reaction conversion.

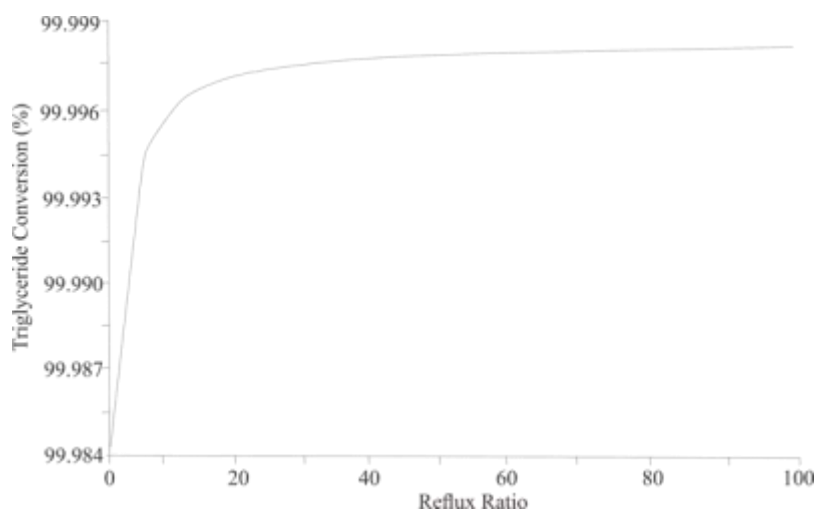


Fig. 5. The Effect of Reflux Ratio on Triglyceride Conversion

3.2.2 The effect of methanol-oil ratio on triglyceride conversion

The effect of feed (methanol to oil) ratio on the triglyceride conversion was disclosed in Figure 6. The simulation shows that the higher methanol to oil ratio promoted the triglyceride conversion. This was attributable to the fact that the higher excess of reactant will drive the equilibrium-limited reaction to right, affording a higher reaction conversion.

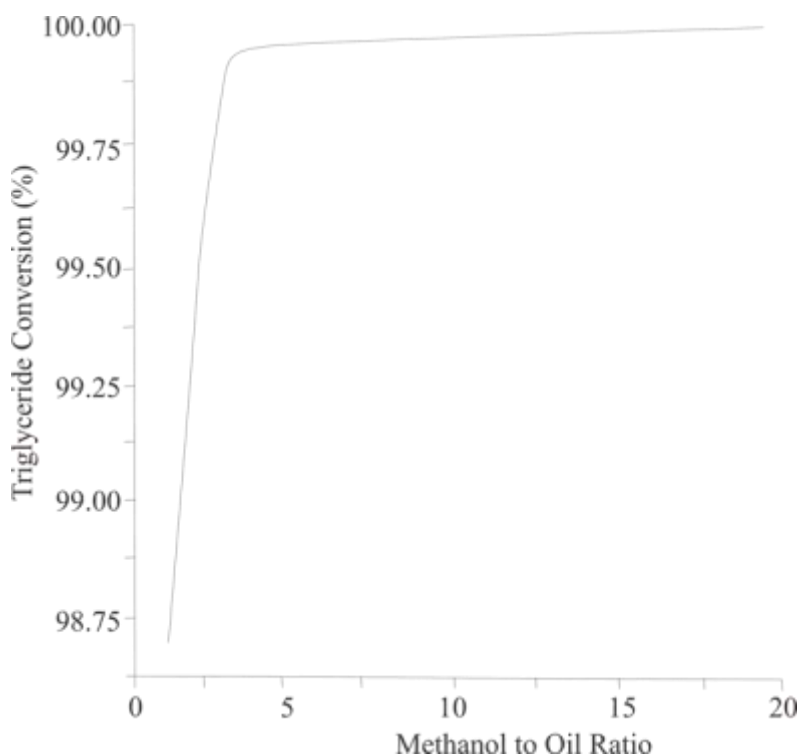


Fig. 6. The Effect of the Feed (Methanol-Oil Ratio) on Triglyceride Conversion

3.2.3 Effect of bottom to feed ratio on triglyceride conversion

Figure 7 shows that the higher bottom to feed ratio leads to the lower triglyceride conversion in the transesterification. This was because the higher bottom to feed ratio initiated the less reflux ratio in the distillate, thus reducing the conversion.

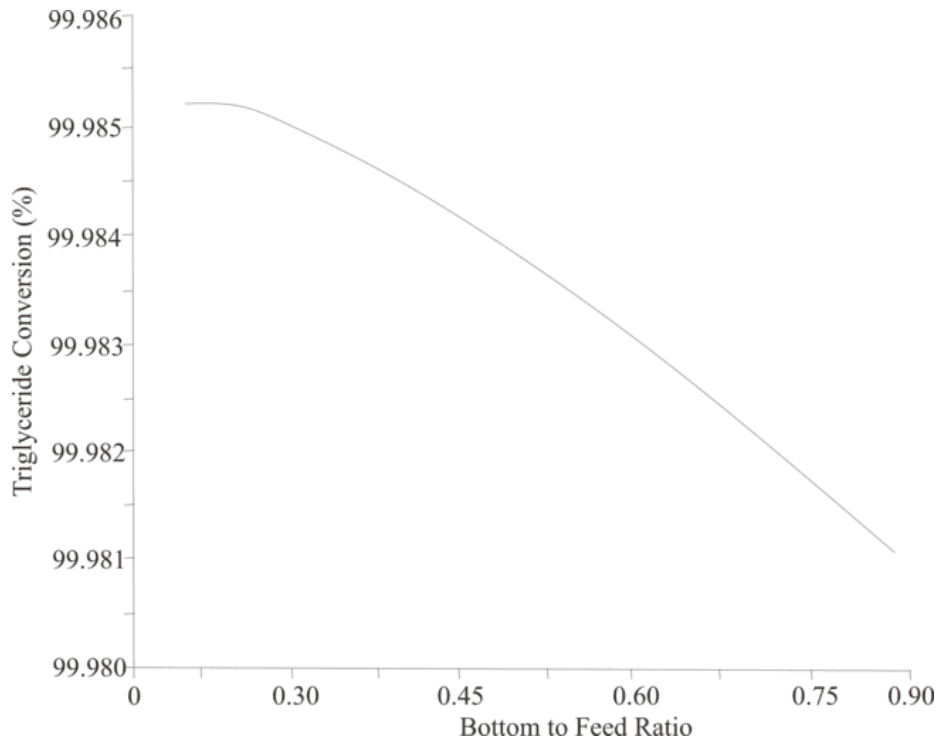


Fig. 7. The Effect of the Bottom to Feed Ratio on the Triglyceride Conversion

4. Conclusions

Based on the results of the steady state simulation study of Integrated Double Column Reactive Distillation (IDC-RC) esterification and transesterification of used cooking oil into biodiesel using Aspen Plus V10 software, it can be inferred as follows. The basic simulation of FFA esterification process of used cooking oil using IDC-RD provided a conversion of 96.59 % with a reflux ratio of 0.5, a bottom to feed ratio of 0.5, and a feed methanol-oil ratio of 4: 1. The effect of each parameter was evaluated independently using sensitivity analysis. The sensitivity analysis revealed that the higher reflux ratio, methanol to oil ratio, and bottom to feed ratio increased the FFA conversion. It was also discovered that esterification using a reflux ratio of 25 resulted in a conversion of 98.95%, a bottom to feed ratio of 0.75 gave a conversion of 98.828%, and a feed (methanol to oil) ratio of 13: 1 contributed to the conversion of 99.591%. The second column was assigned for the transesterification reaction. The basic simulation on the transesterification process of used cooking oil on IDC-RD denoted a conversion of 99.98% with a reflux ratio of 0.5, a bottom to feed ratio of 0.5, and a feed methanol-oil ratio of 3: 1. However, the results of sensitivity analysis on the IDC-RD transesterification demonstrated that changing of the process parameter slightly influenced the reaction conversion since a high conversion has been reach using basic parameter condition.

Acknowledgement

The funding resource from the Directorate of Research and Community Service – Ministry of Research, Technology and Higher Education (DRPM – Kemenristekdikti) through the Hibah Pasca Doktor Grant with the contract number of 078/SP2H/LT/DRPM/2019 (internal contract number of 15.18.3/UN37/ PPK.3.1/2019).

References

- [1] Heyko, Eduardo, Zamruddin Hasid, and Priyagus Priyagus. "Strategi pemanfaatan energi terbarukan dalam rangka kemandirian energi daerah provinsi kalimantan timur." *INOVASI* 12, no. 1 (2016): 01-28.
- [2] Statistik, Badan Pusat. "Statistik kelapa sawit Indonesia 2017." *Jakarta (ID): Badan Pusat Statistik* (2018).
- [3] Noshadi, I., N. A. S. Amin, and Richard S. Parnas. "Continuous production of biodiesel from waste cooking oil in a reactive distillation column catalyzed by solid heteropolyacid: optimization using response surface methodology (RSM)." *Fuel* 94 (2012): 156-164. <https://doi.org/10.1016/j.fuel.2011.10.018>
- [4] Jaat, Norrizam, Amir Khalid, Norrizal Mustafa, Fathul Hakim Zulkifli, Norshuhaila Mohamed Sunar, Ridwan Saputra Nursal, Mahmod Abd Hakim Mohamad, and Djamal Didane. "Analysis of injection pressure and high ambient density of biodiesel spray using computational fluid dynamics." *CFD Letters* 11, no. 1 (2019): 28-39.
- [5] "Kiprah Biodiesel Dalam Mendukung Pengembangan Energi Baru Terbarukan : Capaian Program B30 Pada Semester I 2021." Direktorat Jenderal EBTKE - Kementerian ESDM, July 25, 2021.
- [6] Hayder, G., and P. Puniyarsen. "Identification and evaluation of wastes from biodiesel production process." *Journal of Advanced Research in Applied Sciences and Engineering Technology* 3, no. 1 (2016): 21-29.
- [7] Kusumaningtyas, Ratna Dewi, Prima Astuti Handayani, Rochmadi Rochmadi, Suryo Purwono, and Arief Budiman. "Tin (II) chloride catalyzed esterification of high FFA jatropha oil: Experimental and kinetics study." *International Journal of Renewable Energy Development* 3, no. 2 (2014): 75-81. <https://doi.org/10.14710/ijred.3.2.75-81>
- [8] Jain, Siddharth, M. P. Sharma, and Shalini Rajvanshi. "Acid base catalyzed transesterification kinetics of waste cooking oil." *Fuel Processing Technology* 92, no. 1 (2011): 32-38. <https://doi.org/10.1016/j.fuproc.2010.08.017>
- [9] Kumar, Mukesh, and M. P. Sharma. "Assessment of potential of oils for biodiesel production." *Renewable and Sustainable Energy Reviews* 44 (2015): 814-823. <https://doi.org/10.1016/j.rser.2015.01.013>
- [10] Valente, Osmano Souza, Vanya Márcia Duarte Pasa, Carlos Rodrigues Pereira Belchior, and José Ricardo Sodr . "Physical–chemical properties of waste cooking oil biodiesel and castor oil biodiesel blends." *Fuel* 90, no. 4 (2011): 1700-1702. <https://doi.org/https://doi.org/10.1016/j.fuel.2010.10.045>
- [11] Elangovan, T., G. Anbarasu, and L. Jeryraj Kumar. "Development of Calophyllum inophyllum biodiesel and analysis of its properties at different blends." *International Journal of ChemTech Research* 9, no. 4 (2016): 220-229.
- [12] Olasheu, T. I., K. A. Adebisi, M. O. Durowoju, and K. O. Odesanya. "Determination of Some Physical Properties of Jatropha (Jatropha Curcas) Oil." *International Journal of Engineering Research* 4, no. 6 (2015): 331-338. <https://doi.org/10.17950/ijer/v4s6/612>
- [13] Hanafie, Ahmad, Andi Haslinah, Qalaman Qalaman, and Akbar Made. "PERMODELAN KARAKTERISTIK BIODIESEL DARI MINYAK JELANTAH." *ILTEK: Jurnal Teknologi* 12, no. 02 (2017): 1775-1779. <https://doi.org/10.47398/iltek.v12i02.89>
- [14] Kusumaningtyas, Ratna Dewi, Haniif Prasatiawan, Brylian Rizky Pratama, Dani Prasetya, and Anwaruddin Hisyam. "Esterification of Non-edible Oil Mixture in Reactive Distillation Column over Solid Acid Catalyst: Experimental and Simulation Study." *Journal of Physical Science* 29 (2018): 215-226. <https://doi.org/10.21315/jps2018.29.s2.17>
- [15] Kumar, Ashwani, and Satyawati Sharma. "Potential non-edible oil resources as biodiesel feedstock: an Indian perspective." *Renewable and Sustainable Energy Reviews* 15, no. 4 (2011): 1791-1800. <https://doi.org/10.1016/j.rser.2010.11.020>
- [16] Oo, Ye Min, Makatar Wae-hayee, and Chayut Nuntadusit. "Experimental and Numerical Study on the Effect of Teardrop Dimple/Protrusion Spacing on Flow Structure and Heat Transfer Characteristics." *Journal of Advanced Research in Experimental Fluid Mechanics and Heat Transfer* 2, no. 1 (2020): 17-32. <https://doi.org/10.1016/j.ijheatmasstransfer.2015.01.055>
- [17] Alawi, Omer A., and Haslinda Mohamed Kamar. "Performance of Solar Thermal Collector Using Multi-Walled Carbon Nanotubes: Simulation Study." *Journal of Advanced Research in Micro and Nano Engineering* 2, no. 1 (2020): 12-21.
- [18] Taib, Norhidayah Mat, Mohd Radzi Abu Mansor, and Wan Mohd Faizal Wan Mahmood. "Simulation of Hydrogen Combustion in Neon-Oxygen Compression Ignition Engine." *CFD Letters* 12, no. 12 (2020): 1-16. <https://doi.org/10.37934/cfdl.12.12.116>

- [19] kadhim Sharaf, Hussein, Nawal Aswan Abdul Jalil, and Sadeq Salman. "A simulation on the effect of ultrasonic vibration on ultrasonic assisted soldering of Cu/SAC305/Cu joint." *Journal of Advanced Research in Applied Mechanics* 36, no. 1 (2017): 1-9.
- [20] Souza, Thibério PC, Luiz Stragevitch, Augusto Knoechelmann, Jose GA Pacheco, and Jose MF Silva. "Simulation and preliminary economic assessment of a biodiesel plant and comparison with reactive distillation." *Fuel processing technology* 123 (2014): 75-81. <https://doi.org/10.1016/j.fuproc.2014.02.004>
- [21] Smejkal, Quido, and M. Šoóš. "Comparison of computer simulation of reactive distillation using ASPEN PLUS and HYSYS software." *Chemical Engineering and Processing: Process Intensification* 41, no. 5 (2002): 413-418. [https://doi.org/10.1016/S0255-2701\(01\)00160-X](https://doi.org/10.1016/S0255-2701(01)00160-X)
- [22] Pirola, Carlo, Federico Galli, Michele Corbetta, and Flavio Manenti. "Robust kinetic modeling of heterogeneously catalyzed free fatty acids esterification in monophasic liquid/solid packed bed reactor: rival model discrimination." *Clean Technologies and Environmental Policy* 17, no. 5 (2015): 1139-1147. <https://doi.org/10.1007/s10098-015-0925-x>
- [23] Gerbaud, Vincent, and Ivonne Rodriguez-Donis. "Advances in Extractive Distillation." *Reference Module in Chemistry, Molecular Sciences and Chemical Engineering*, 2019. <https://doi.org/10.1016/b978-0-12-409547-2.05949-7>
- [24] Mengyu, G. A. N., P. A. N. Deng, M. A. Li, Y. U. E. En, and H. O. N. G. Jianbing. "The kinetics of the esterification of free fatty acids in waste cooking oil using Fe₂(SO₄)₃/C catalyst." *Chinese Journal of Chemical Engineering* 17, no. 1 (2009): 83-87. [https://doi.org/10.1016/S1004-9541\(09\)60037-9](https://doi.org/10.1016/S1004-9541(09)60037-9)
- [25] Talebian-Kiakalaieh, Amin, Nor Aishah Saidina Amin, Alireza Zarei, and Iman Noshadi. "Transesterification of waste cooking oil by heteropoly acid (HPA) catalyst: optimization and kinetic model." *Applied Energy* 102 (2013): 283-292. <https://doi.org/https://doi.org/10.1016/j.apenergy.2012.07.018>
- [26] Kusumaningtyas, Ratna Dewi, Naomi Ratrianti, Indah Purnamasari, and Arief Budiman. "Kinetics study of Jatropha oil esterification with ethanol in the presence of tin (II) chloride catalyst for biodiesel production." In *AIP Conference Proceedings*, vol. 1788, no. 1, p. 030086. AIP Publishing LLC, 2017. <https://doi.org/10.1063/1.4968339>

Congratulations, your paper has been published!

Nor Azwadi <azwadi@akademiabaru.com>


Tue, May 24, 2022 at 8:45 AM

To: ratnadewi.kusumaningtyas@mail.unnes.ac.id, andredianata12@gmail.com, yoshuawira1@gmail.com, haniif.prasetiawan@mail.unnes.ac.id, pragusti.nanggala@students.unnes.ac.id, istadi@live.undip.ac.id

Congratulations, your paper has been published!

Dear Ratna Dewi Kusumaningtyas, Andre Dianata Hogi Kusuma, Yoshua Wira Putra Budiono, Haniif Prasetiawan, Pragusti Lintang Adhi Nanggala, I Istadi,

Your work has now been published in the [Journal of Advanced Research in Fluid Mechanics and Thermal Sciences 94, no. 1.](#)

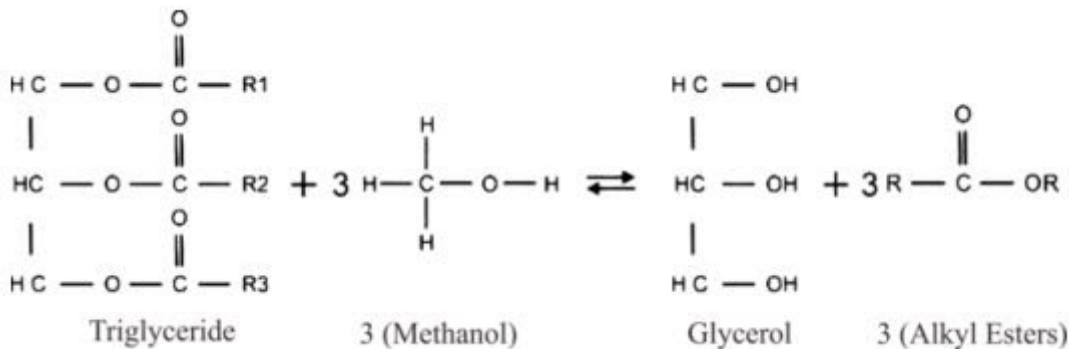

Biodiesel Production from Used Cooking Oil Using Integrated Double Column Reactive Distillation: Simulation Study

It's the final version of your work and can be cited, downloaded and shared.

Ratna Dewi Kusumaningtyas, Andre Dianata Hogi Kusuma, Yoshua Wira Putra Budiono, Haniif Prasetiawan, Pragusti Lintang Adhi Nanggala, & I Istadi. (2022). Biodiesel Production from Used Cooking Oil Using Integrated Double Column Reactive Distillation: Simulation Study. *Journal of Advanced Research in Fluid Mechanics and Thermal Sciences*, 94(1), 152–162. <https://doi.org/10.37934/arfmts.94.1.152162>

Promote your works to boost your citation count. You may consider the following techniques:

- Use social media. Provide links to your papers on social media (e.g., Facebook, Twitter, Academia.edu, ResearchGate, Mendeley) and your university profile page.
- Talk to other researchers about your paper, and email copies of your paper to researchers who may be interested. Create a blog or a website dedicated to your research and share it.
- Cite your own past papers as appropriate to increase visibility of your published papers.

Thank you again for publishing with us. We wish you the best success with your research.

Kind regards

INTERNATIONAL CONFERENCE ON COMPUTATIONAL HEAT TRANSFER AND FLUID MECHANICS

30 - 31st July 2022

PUTRAJAYA, MALAYSIA

The aim of **International Conference on Computational Heat Transfer and Fluid Mechanics** is to become the leading annual conferences in the fields related to computational heat transfer and fluid mechanics. The goal of the conferences is to gather scholars, researchers, and scientists from all over the world to present advances in their research fields and to foster an environment conducive to exchanging ideas and information.

Publications

- Participants are expected to submit an **extended abstract** with maximum of **6 pages**. The **extended abstract** will be published in the following Google Scholar Indexed of Akademia Baru journal.
 - [Journal of Advanced Research in Numerical Heat Transfer](#)
- All authors are then encouraged to submit their **Full paper** with more than 8 pages for **SCOPUS indexed** publication with **DOI**
- - [CFD Letters](#)

Certificate will be given to the best paper and the best presenter of each session

Conference Fee and Publication

- Publication in Google Scholar journal (extended abstract) only (**local: RM350, International: USD100**) *or*
- Publication in SCOPUS indexed journal (full paper) only (**local: RM1000, International: USD300**) *or*
- Publication in Google Scholar journal (extended abstract) and SCOPUS indexed journal (full paper) (**local: RM1350, International: USD350**)

Sub-Theme

- Architecture
- Biological Flows
- Biology
- Boiling and Evaporation
- Chemistry
- Compressible Flows
- Computational Heat Transfer
- Computer Science
- Condensation
- Drops and Bubbles
- Electrohydrodynamics
- Engineering Flows
- Environmental
- Environmental Heat Transfer
- Gas Turbines
- Geology, Engineering
- Geophysical flows
- Health Science
- Heat Exchangers
- Heat Pipes
- Heat Transfer in Combustion and Engines
- Magnetohydrodynamics
- Mathematics and Statistics
- Medicine
- Microscale Flows
- Multiphase Flows
- Nanofluids
- Natural and Technological Sciences
- Particle - Laden Flows
- Physics
- Reactive Flows
- Rotating Flows
- Single Phase Heat Transfer
- Superfluids
- Turbulence

LANGUAGES

- English

DEADLINES:

- Abstract Submission Deadline: 31 May 2022
- Notification of Abstract Acceptance: 15 June 2022
- Extended Abstract Submission Deadline: 15 July 2022
- Full Paper Submission Deadline: 20 July 2022
- Payment Deadline: 20 July 2022
- Early bird Payment Deadline: 30 June 2022 (Discount 5% of conference fee)

[SUBMIT YOUR ABSTRACT NOW \(CLICK HERE\)](#)


Contact us:

Dr. Nor Azwadi Che Sidik

Email: azwadi@akademiabaru.com, Tel: +60177541097

"SHARE YOUR KNOWLEDGE FOR A BETTER TOMORROW"

SEMARAK ILMU PUBLISHING
NO. 22, Jalan Puteri 5A/3,
Bandar Puteri Bangi, 43000 Kajang,
Selangor, MALAYSIA



Biodiesel Production from Used Cooking Oil Using Integrated Double Column Reactive Distillation: Simulation Study

Ratna Dewi Kusumaningtyas^{1,*}, Andre Dianata Hogi Kusuma¹, Yoshua Wira Putra Budiono¹, Haniif Prasetiawan¹, Pragusti Lintang Adhi Nanggala¹, I Istadi²

¹ Chemical Engineering Department, Faculty of Engineering, Universitas Negeri Semarang Sekaran, Gunungpati, Semarang 50229 Indonesia

² Department of Chemical Engineering, Diponegoro University, Jln. Prof. Soedarto, Kampus UNDIP Tembalang, Semarang, Central Java, 50275 Indonesia

ARTICLE INFO

Article history:

Received 10 November 2021

Received in revised form 6 March 2022

Accepted 9 March 2022

Available online 9 April 2022

Keywords:

Reactive distillation; biodiesel;
simulation; Aspen; UNIQUAC

ABSTRACT

Dependency on fossil – based energy has become a global problem. Indonesia has started a movement in changing energy sources from fossil to new and renewable energy. Biodiesel is one of the renewable energy sources. Used cooking oil is one of the prospective feed-stock in biodiesel production. Used cooking oil contains 21.84% free fatty acid and 78.16% triglycerides. This study simulated the production of biodiesel from used cooking oil using the Aspen Plus v10 software. The production system used an Integrated Double Column Reactive Distillation (IDC-RD) system. The thermodynamic method employed in the simulation system was UNIQUAC. This study used the sensitivity analysis function in the Aspen Plus v10 application to analyze the effect of reflux ratio, the bottom to feed ratio, and the methanol to oil ratio on the reaction conversion. The reflux ratio applied in the simulation was 0.5 – 200, the bottom to feed ratio was 0.25 - 0.9, and the methanol to oil ratio was 1: 3 - 9:8. It was found that the esterification column with a reflux ratio of 0.5, a bottom to feed ratio of 0.5, and a methanol-oil ratio of 4: 1 resulted in a conversion of 96.59%. It was also demonstrated that the transesterification column with a reflux ratio of 0.5, a bottom to feed ratio of 0.5, and a methanol-oil ratio of 3: 1 resulted in a conversion of 99.98%.

1. Introduction

The availability of fossil energy, especially crude oil in Indonesia, has become increasingly scarce, causing Indonesia to become an importer of crude oil and its derivative products [1]. Based on data from the Indonesian Central Statistics Agency [2], it was stated that in 1996 Indonesia's oil imports amounted to 10.6893 million tons and in 2018 Indonesia's oil imports increased to 26.7371 million tons. Meanwhile, oil exports in Indonesia in 1996 amounted to 10.1338 million tons and in 2018 decreased to 3.1221 million tons. This shows that Indonesia experienced an oil balance surplus in 1996 of 555.5 thousand tons, while it experienced an oil balance deficit in 2018 of 23.615 million tons.

* Corresponding author.

E-mail address: ratnadewi.kusumaningtyas@mail.unnes.ac.id

<https://doi.org/10.37934/arfmts.94.1.152162>

The increase in energy demand caused by the high rate of economic growth and population growth coupled with the depletion of world oil reserves and the problem of gas emissions caused by excess fossil fuels are strong reasons for every country to immediately develop and utilize renewable alternative energy. This alternative energy has advantages when compared to fossil energy currently in use, namely that it will not run out if it is managed properly and is environmentally friendly, one of which is biodiesel [3]. Based on the environmental perspective, biodiesel is an interesting renewable energy to be widely applied since it is non-toxic, has a low aromatic content, and releases a lower greenhouse gases such as unburned hydrocarbon, carbon monoxide, and particulate matters [4].

Indonesia has created a new policy to address the problem of fossil energy and its increasing energy needs. The new national energy policy is regulated in Government Regulation No. 79/2014. The new regulation set a target for Indonesia's new and renewable energy target in 2025 which is 23% of the total national energy. One of the ways for Indonesian government to achieve the target of new and renewable energy is by issuing a mandatory policy of B30 (Biodiesel 30%) [5]. In addition to B30, the Government is starting to develop in achieving the B100 (Biodiesel 100%) program.

Biodiesel is an alternative diesel engine fuel which consists of a mixture of fatty acid alkyl esters. Biodiesel can be produced through transesterification reactions of triglycerides contained in animal fats and plant oils with light alcohol and the presence of alkaline or acid catalysts. The reaction results in biodiesel as main product and glycerine as the by-product [6]. The direct transesterification process cannot be applied when the oil raw materials used contain high *free fatty acids* (FFA) (> 2%). In the transesterification reaction, the FFA content in the raw material must be lower than 1-2% to avoid lathering reaction between FFA and alcohol which can result in increased catalyst consumption, reduce biodiesel yield, and inhibit product separation [7]. Esterification reaction must be done to reduce FFA levels by reacting FFA with alcohol.

The materials for producing biodiesel from vegetable oil consist of used cooking oil, *Calophyllum inophyllum* oil, castor oil, and many more. Used cooking oil has FFA levels of 21.84% [8], *Calophyllum inophyllum* oil and castor oil have 39% and 19.8%, respectively [9]. Biodiesel cannot have high viscosity because it will damage and interfere with engine performance so that in the selection of raw materials, viscosity is a major consideration. The viscosity of used cooking oil, *Calophyllum inophyllum* oil, and castor oil is 30 cst [10], 38.17 cst [11], and 162.8 cst [12], respectively. Used cooking oil compared to *Calophyllum inophyllum* oil and castor oil has more advantages in viscosity and FFA in used cooking oil is lower than that of *Calophyllum inophyllum* oil so that used cooking oil is suitable as a raw material for making biodiesel.

Used cooking oil is an alternative material that can be used as an ingredient for making biodiesel which can minimize environmental pollution due to the free and unmanaged disposal of used cooking oil. If left unchecked and prevented immediately, there will be a pile of carcinogenic waste oil which is detrimental for health and can also cause poisoning in the body [13]. Therefore, used cooking oil should be recycled and used as raw material for producing biodiesel. Used cooking oil production is related to the total consumption of palm oil in Indonesia. In 2018, there were 12.2 million tonnes of oil consumed domestically.

There are several advanced biodiesel manufacturing processes such as reactive distillation (RD) and ionic liquid (IL) application. The use of Ionic Liquid has disadvantages for its expensive price of Ionic Liquid and the long reaction time. On the other hand, reactive distillation integrates reaction and separation in one unit column [14]. It has advantages since it needs a small ratio of oil alcohol, low operating temperature, lower costs, less waste products, low reactant costs, increased conversion through product removal, and useful to limit the azeotropic conditions in the column [15].

There are some parameters that affect the performance of the reactive distillation for biodiesel production. Modeling and simulation is often used for determining the effect of main parameters on the biodiesel conversion to reduce the number of experimental investigation which is usually costly. Modeling, simulation and numerical method are widely applied in engineering area. Many work related to the simulation using various tools have been reported in literature [16,17,18,19].


In this work, reactive distillation simulation was conducted using Aspen Plus software version 10.0 in a steady state condition. Souza *et al.*, [20] have optimized the process of making biodiesel using HYSYS v7.2 resulting in an increase in conversion of 18% and an error of 3.2%. Smejkal *et al.*, [21] has made a comparison between simulation using Aspen Plus and Hysis in the reactive distillation system. It was found that the error produced by Aspen Plus and Hysis were 1.2% and 2.8%, respectively. Based on the error parameter and the description above, Aspen Plus has more advantages in simulating the reactive distillation process. Therefore, in this work, Aspen Plus was employed for the simulation of reactive distillation to produce biodiesel. Process simulation is urgent for designing processing equipment to scale up and predict tool performance on an industrial scale. In this simulation, process optimization was carried out using the sensitivity analysis feature on the variable reflux ratio (RR), feed ratio (FR), feed stage (FS), and distillate rate (DR).

The thermodynamic model used in this study was the UNIQUAC model which was rarely used in other literature. The UNIQUAC model is more suitable for calculating the non-ideal characteristic of the liquid mixture such as the system in biodiesel synthesis [22]. Çağatay and Karacan [23] cagatay have performed a simulation using reactive distillation and heterogeneous catalysts for biodiesel production using used cooking oil as raw material. However, the system used in the research was a single column which only involved a transesterification reaction while the esterification as pre-treatment step was carried out separately. This study offered a novelty in biodiesel manufacturing process technology which was Integrated Double Column Reactive Distillation (IDC-RD). IDC-RD used a two column reactive distillation system which integrated the esterification and transesterification processes in one set of equipment to produce biodiesel with a more optimal yield. This work revealed the effect of the main parameters on biodiesel manufacturing process using IDC-RD which will be useful for process design and scale-up.

2. Methodology

In this work, an integrated double column reactive distillation (IDR-RC) was applied to produce biodiesel. Two reactions, namely esterification and transesterification reactions, were performed consecutively in the two reactive distillation column. The esterification reaction was conducted as the pre-treatment step to reduce the free fatty acid (FFA) content in used cooking oil in the first column. Subsequently, transesterification reaction as the main reaction to produce biodiesel was carried out in the second reactive distillation column. The simulation process of biodiesel production from used cooking oil using IDC-RD was performed with ASPEN Plus V10.0.

The formula for the transesterification reaction is exhibited in Eq. (1).

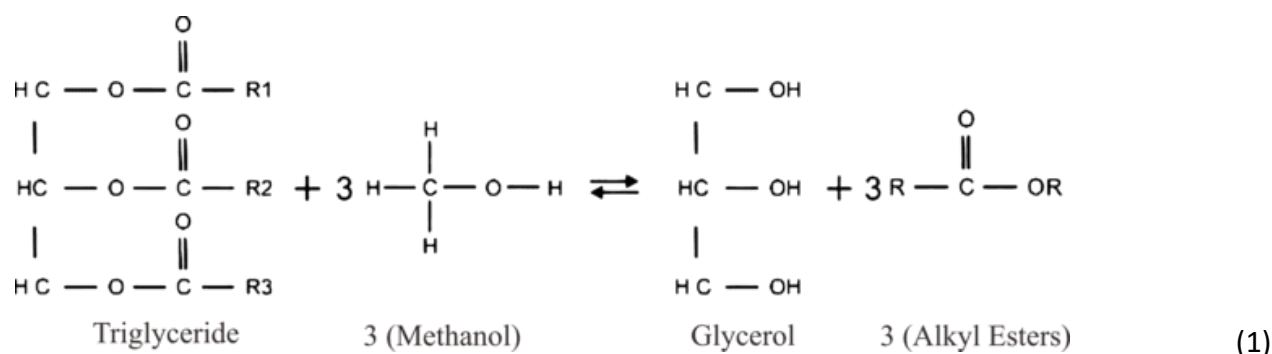

The feed-stock for biodiesel synthesis in this work was used cooking oil which contained 21.84% FFA and 78.16% triglycerides. Fatty acid composition of the raw material was presented in Table 1 [8].

Table 1
 Fatty Acid Composition of the Used Cooking Oil

Component	% mole
Palmitic Acid	1.4196
Linoleic Acid	8.3429
Oleic Acid	8.8452
Stearic Acid	0.3058
Linolenic Acid	2.9266
Tripalmitate	5.0804
Trilinoleate	29.8571
Trioleate	31.6548
Tristearat	1.0942
Trilinolenic	10.4734

The kinetics data of the esterification reaction taken from the literature can be seen on Table 2 [24].

Table 2
 Esterification reaction data of used cooking oil

Parameter	Collision Factor (A)	Activation Energy (Ea)
	$A_1 = 128.8 / \text{minute}$	$Ea_1 = 4.239 \text{ kJ/mole}$
	$A^*_1 = 1.307 \times 10^3 / \text{minute}$	$Ea^*_1 = 18.59 \text{ kJ/mole}$
T boiling point methanol	64.7°C	

The kinetics data of the transesterification reaction kinetics taken from the literature is demonstrated in Table 3 [25].

Table 3
 Data of used cooking oil transesterification reactions

Parameter	Collision Factor	Activation Energy
	$A_2 = 2.9 \times 10^7 / \text{minute}$	$Ea_2 = 53.99 \text{ kJ/mole}$
T boiling point methanol	64.7°C	

3. Results

In this study, an Integrated Double Column Reactive Distillation (IDC-RD) simulation has been performed. IDC-RD applied two column reactive distillations which integrated in one set of equipment to accomplish the esterification and transesterification processes consecutively. Esterification reaction of used cooking oil with methanol is a crucial step to reduce the high FFA content prior to the main transesterification reaction to produce biodiesel. The process flow simulation is shown in Figure 1. The Basic simulation and sensitivity analysis was performed to examine the effect of the reflux ratio, the methanol to oil ratio, and the bottom to feed ratio on the reaction conversion.

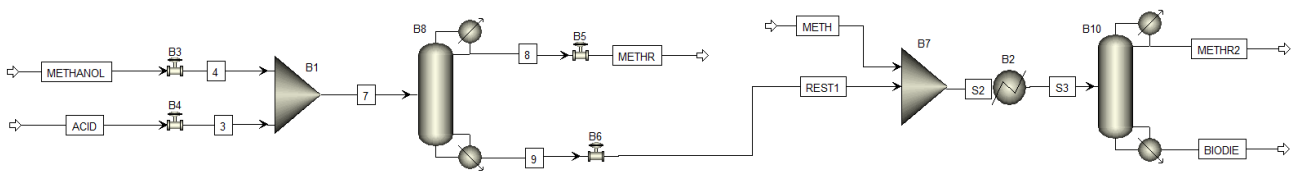


Fig. 1. Steady State Aspen Plus v10.0 Simulation Flowsheet of the IDC-RC of Biodiesel Production

3.1 Basic Simulation of Steady State Reactive Distillation (RD) Esterification Column

Esterification is a crucial step for reducing the FFA content prior to transesterification reaction in order to avoid the undesired saponification side reaction [26]. The main parameters of the IDC-RD for the esterification process were inputted into the Aspen Plus V10.0 using the radfrac type device. The basic simulation parameters were as follows: the number of stages was 5, the reaction zone was at stage 3, the input feed zone was at stage 2, the feed temperature was 60 °C, the pressure was set at the atmospheric pressure, the feed (oil to methanol) ratio was 1: 4, the bottom to feed ratio was 0.5, and the reflux ratio was 0.5. The results showed that the FFA, which was composed of oleic acid, linoleic acid, palmitic acid, stearic acid, and linolenic acid, decreased up to 96.59 % due to the reaction process with methanol. Those fatty acids were converted into methyl oleate, methyl linoleate, methyl palmitate, methyl stearic, and methyl linolenic acid, correspondingly. This result was considerably higher than the similar reaction conducted using the other types of biodiesel synthesis technology. Agustian *et al.*, [27] reported that the esterification of used cooking oil using ultrasonic reactor resulted in a conversion of 42.08%. Another study conducted by Mengyu *et al.*, [24] conveyed that the esterification of used cooking oil using conventional methods in the presence of Fe_2SO_4/C catalyst resulted in 96% conversion.

3.1.1 Effect of the reflux ratio on the FFA conversion

Figure 2 displays the effect of the reflux ratio on the FFA conversion. The higher reflux ratio led to the higher FFA conversion. This was due to the fact that the higher reflux denoted the longer reaction time. It implied that more intensive contact between the reactant molecules, yielding the higher conversion. Based on sensitivity analysis, the optimum result was obtained at the reflux ratio of 25 with a FFA conversion of 98.95%.

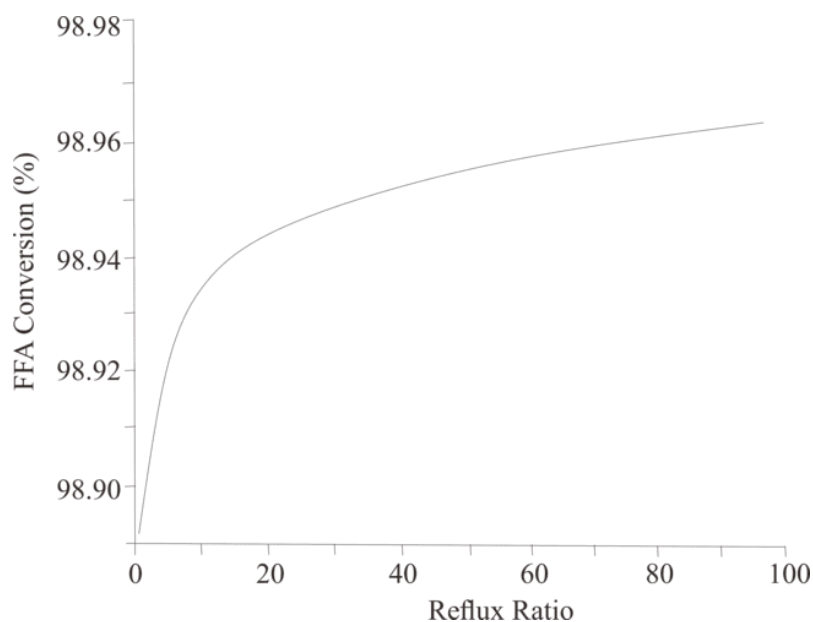


Fig. 2. The Effect of Reflux Ratio on the FFA Conversion

3.1.2 The effect of the feed ratio on the FFA conversion

Figure 3 reveals the effect of feed (methanol to oil) ratio on the FFA conversion. It was revealed that the higher methanol to oil ratio brought about the higher FFA conversion. This phenomenon occurred since the addition of the methanol will caused the excess of the reactant, which improved the reaction conversion. The result of the sensitivity analysis disclosed that the highest conversion was achieved at the methanol to oil ratio of 13, resulting in the FFA conversion of 99.591. This result was higher to a great extent compared to the conversion provided by the conventional reactor for the identical value of the reactant molar ratio.

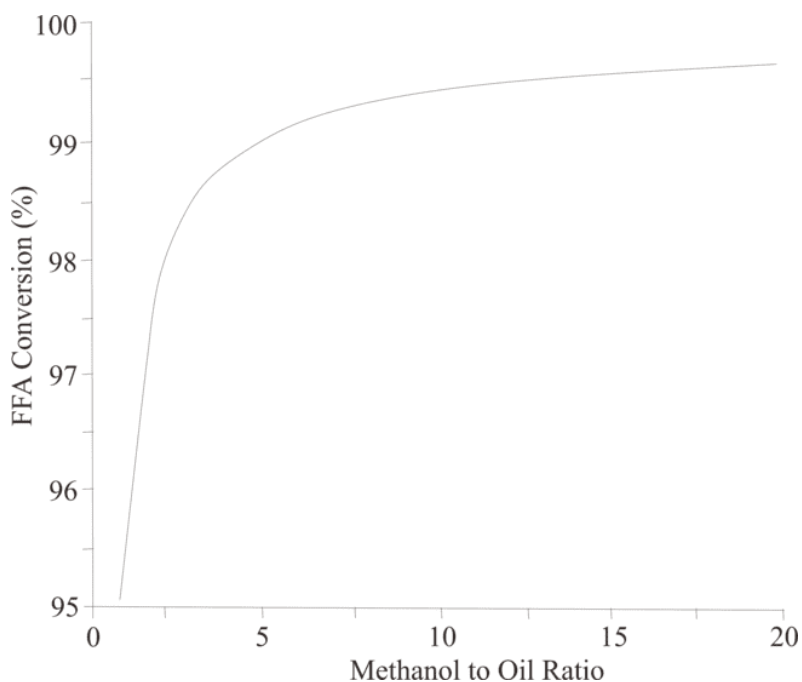


Fig. 3. The Effect of the Methanol to Oil Ratio on the FFA Conversion

3.1.3 The Effect of Bottom to Feed Ratio on FFA Conversion

Figure 4 indicates that the higher bottom to feed ratio led to the higher FFA conversion. This arose since the higher methanol concentration at the bottom will cause a high excess methanol to FFA. On the other hand, esterification is an equilibrium limited reaction, where the far excess reactant will shift the reaction towards the product formation and precede a higher conversion. Based on sensitivity analysis, the optimum result was obtained at a bottom to feed ratio of 0.75 with a conversion of 98.828%.

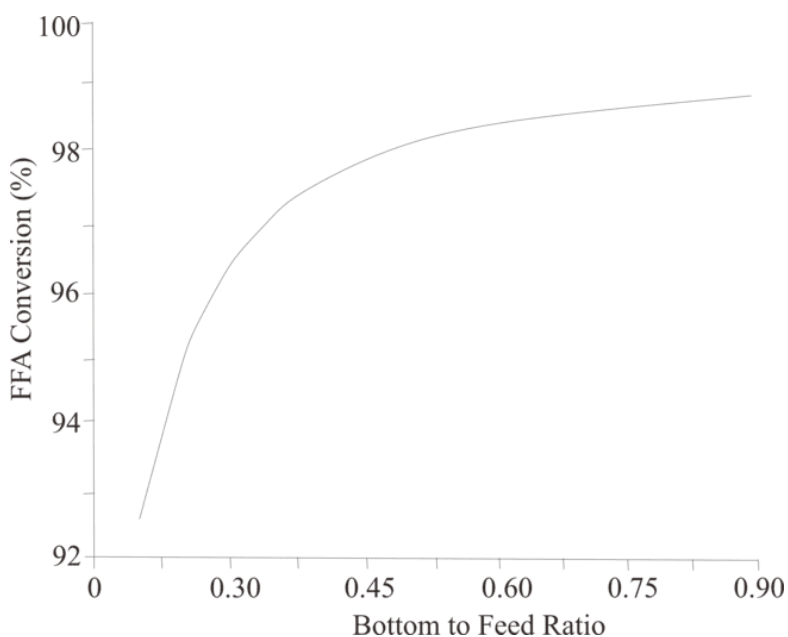


Fig. 4. The Effect of Bottom to Feed Ratio on the FFA Conversion

3.2 Basic Simulation of Steady State Reactive Distillation (RD) Transesterification Column

The main parameters were inputted into the Aspen Plus V10.0 using the radfrac type device. The basic simulation parameters set up were as follows: the number of stages was 5, the reaction zone was at stage 3, feed point location was at stage 2, the feed temperature was 65°C, the operation was conducted at the atmospheric pressure, the feed ratio of oil to methanol was 1: 3, the bottom to feed ratio was 0.5, and the reflux ratio was 0.5. The results exhibited that triglycerides in the form of tripalmitin, tristearin, triolein, trilinolein, and trilinolenin reacted with methanol almost completely. The conversion attained in the transesterification reaction using IDC-RD was 99.98%. It was notably superior compared to those resulted using conventional method and ultrasonic reactor which were 53.6% [28] and 92% [29].

3.2.1 The effect of reflux ratio on triglyceride conversion

Figure 5 discloses the effect of reflux ratio on triglyceride conversion. It can be observed that the higher reflux ratio enhanced the triglyceride conversion. This fact occurred since more reflux generated a longer contact between the reactants, leading to the higher reaction conversion.

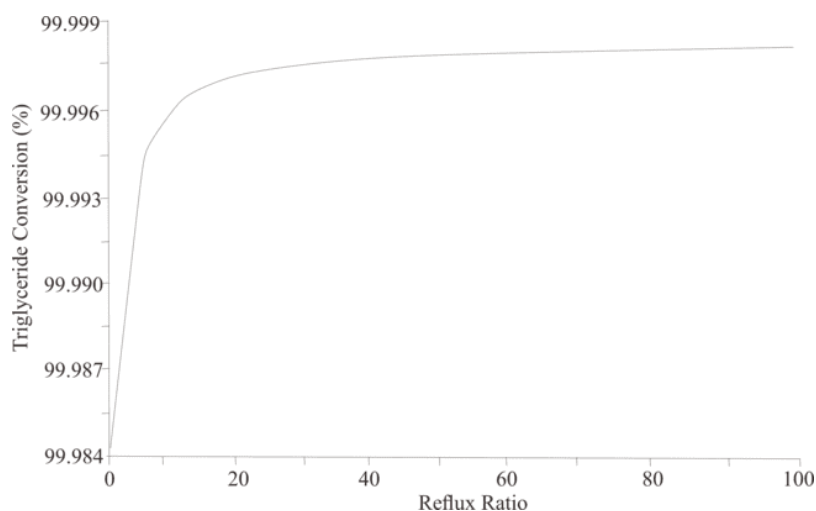


Fig. 5. The Effect of Reflux Ratio on Triglyceride Conversion

3.2.2 The effect of methanol-oil ratio on triglyceride conversion

The effect of feed (methanol to oil) ratio on the triglyceride conversion was disclosed in Figure 6. The simulation shows that the higher methanol to oil ratio promoted the triglyceride conversion. This was attributable to the fact that the higher excess of reactant will drive the equilibrium-limited reaction to right, affording a higher reaction conversion.

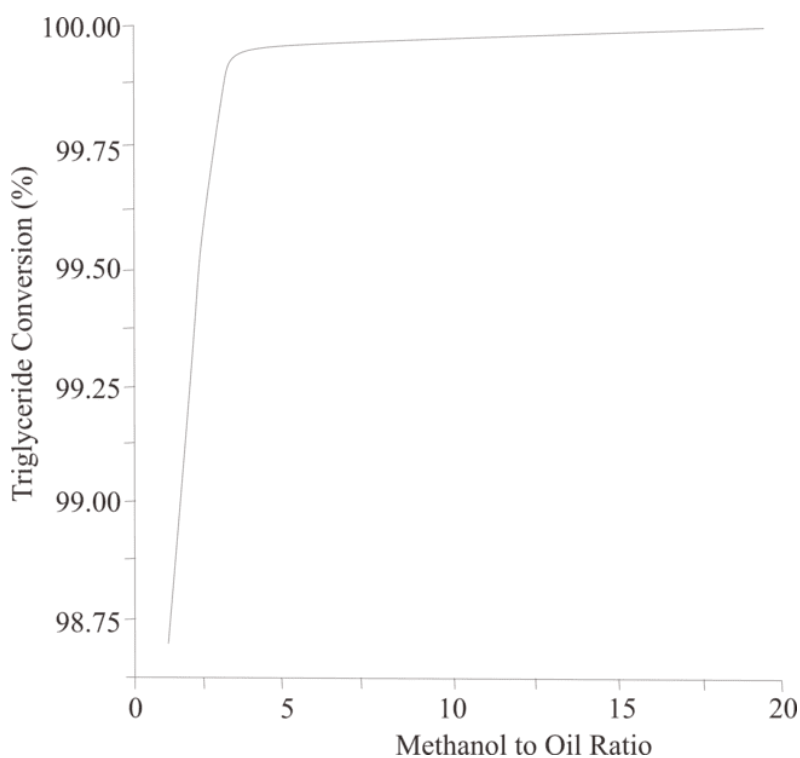


Fig. 6. The Effect of the Feed (Methanol-Oil Ratio) on Triglyceride Conversion

3.2.3 Effect of bottom to feed ratio on triglyceride conversion

Figure 7 shows that the higher bottom to feed ratio leads to the lower triglyceride conversion in the transesterification. This was because the higher bottom to feed ratio initiated the less reflux ratio in the distillate, thus reducing the conversion.

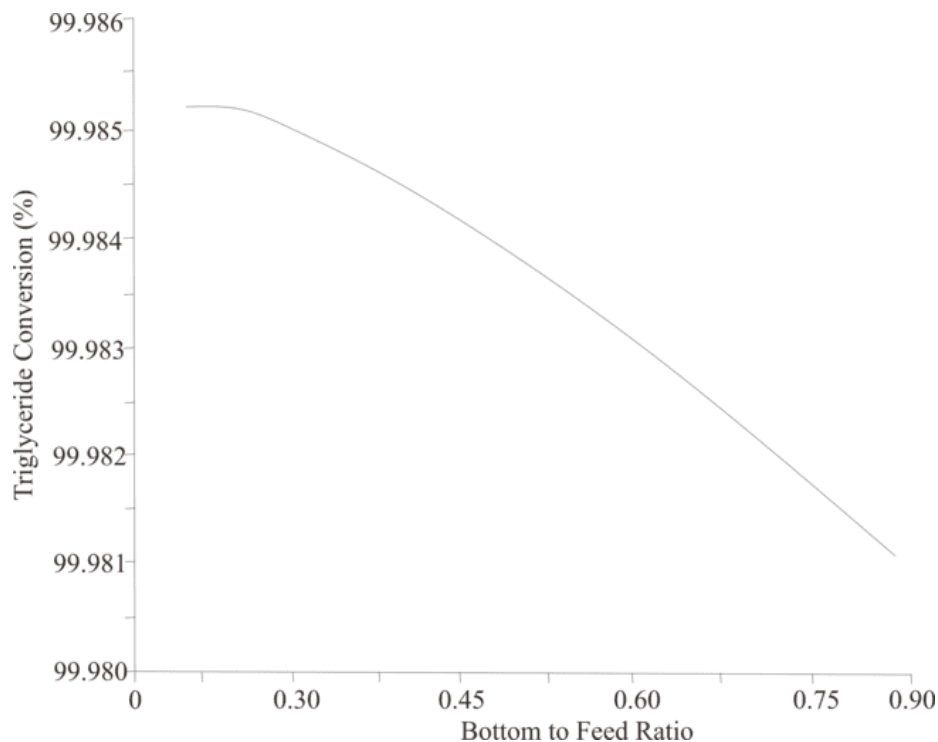


Fig. 7. The Effect of the Bottom to Feed Ratio on the Triglyceride Conversion

4. Conclusions

Based on the results of the steady state simulation study of Integrated Double Column Reactive Distillation (IDC-RC) esterification and transesterification of used cooking oil into biodiesel using Aspen Plus V10 software, it can be inferred as follows. The basic simulation of FFA esterification process of used cooking oil using IDC-RD provided a conversion of 96.59 % with a reflux ratio of 0.5, a bottom to feed ratio of 0.5, and a feed methanol-oil ratio of 4: 1. The effect of each parameter was evaluated independently using sensitivity analysis. The sensitivity analysis revealed that the higher reflux ratio, methanol to oil ratio, and bottom to feed ratio increased the FFA conversion. It was also discovered that esterification using a reflux ratio of 25 resulted in a conversion of 98.95%, a bottom to feed ratio of 0.75 gave a conversion of 98.828%, and a feed (methanol to oil) ratio of 13: 1 contributed to the conversion of 99.591%. The second column was assigned for the transesterification reaction. The basic simulation on the transesterification process of used cooking oil on IDC-RD denoted a conversion of 99.98% with a reflux ratio of 0.5, a bottom to feed ratio of 0.5, and a feed methanol-oil ratio of 3: 1. However, the results of sensitivity analysis on the IDC-RD transesterification demonstrated that changing of the process parameter slightly influenced the reaction conversion since a high conversion has been reach using basic parameter condition.

Acknowledgement

The funding resource from the Directorate of Research and Community Service – Ministry of Research, Technology and Higher Education (*DRPM – Kemenristekdikti*) through the Hibah Pasca

Doktor Grant with the contract number of 078/SP2H/LT/DRPM/2019 (internal contract number of 15.18.3/UN37/ PPK.3.1/2019).

References

- [1] Heyko, Eduardo, Zamruddin Hasid, and Priyagus Priyagus. "Strategi pemanfaatan energi terbarukan dalam rangka kemandirian energi daerah provinsi kalimantan timur." *INOVASI* 12, no. 1 (2016): 01-28.
- [2] Statistik, Badan Pusat. "Statistik kelapa sawit Indonesia 2017." *Jakarta (ID): Badan Pusat Statistik* (2018).
- [3] Noshadi, I., N. A. S. Amin, and Richard S. Parnas. "Continuous production of biodiesel from waste cooking oil in a reactive distillation column catalyzed by solid heteropolyacid: optimization using response surface methodology (RSM)." *Fuel* 94 (2012): 156-164. <https://doi.org/10.1016/j.fuel.2011.10.018>
- [4] Jaat, Norrizam, Amir Khalid, Norrizal Mustaffa, Fathul Hakim Zulkifli, Norshuhaila Mohamed Sunar, Ridwan Saputra Nursal, Mahmud Abd Hakim Mohamad, and Djamal Didane. "Analysis of injection pressure and high ambient density of biodiesel spray using computational fluid dynamics." *CFD Letters* 11, no. 1 (2019): 28-39.
- [5] "Kiprah Biodiesel Dalam Mendukung Pengembangan Energi Baru Terbarukan : Capaian Program B30 Pada Semester I 2021." Direktorat Jenderal EBTKE - Kementerian ESDM, July 25, 2021.
- [6] Hayder, G., and P. Puniyarsen. "Identification and evaluation of wastes from biodiesel production process." *Journal of Advanced Research in Applied Sciences and Engineering Technology* 3, no. 1 (2016): 21-29.
- [7] Kusumaningtyas, Ratna Dewi, Prima Astuti Handayani, Rochmadi Rochmadi, Suryo Purwono, and Arief Budiman. "Tin (II) chloride catalyzed esterification of high FFA jatropha oil: Experimental and kinetics study." *International Journal of Renewable Energy Development* 3, no. 2 (2014): 75-81. <https://doi.org/10.14710/ijred.3.2.75-81>
- [8] Jain, Siddharth, M. P. Sharma, and Shalini Rajvanshi. "Acid base catalyzed transesterification kinetics of waste cooking oil." *Fuel Processing Technology* 92, no. 1 (2011): 32-38. <https://doi.org/10.1016/j.fuproc.2010.08.017>
- [9] Kumar, Mukesh, and M. P. Sharma. "Assessment of potential of oils for biodiesel production." *Renewable and Sustainable Energy Reviews* 44 (2015): 814-823. <https://doi.org/10.1016/j.rser.2015.01.013>
- [10] Valente, Osmano Souza, Vanya Márcia Duarte Pasa, Carlos Rodrigues Pereira Belchior, and José Ricardo Sodr . "Physical–chemical properties of waste cooking oil biodiesel and castor oil biodiesel blends." *Fuel* 90, no. 4 (2011): 1700-1702. <https://doi.org/https://doi.org/10.1016/j.fuel.2010.10.045>
- [11] Elangovan, T., G. Anbarasu, and L. Jeryraj Kumar. "Development of Calophyllum inophyllum biodiesel and analysis of its properties at different blends." *International Journal of ChemTech Research* 9, no. 4 (2016): 220-229.
- [12] Olasheu, T. I., K. A. Adebisi, M. O. Duwoju, and K. O. Odesanya. "Determination of Some Physical Properties of Jatropha (Jatropha Curcas) Oil." *International Journal of Engineering Research* 4, no. 6 (2015): 331-338. <https://doi.org/10.17950/ijer/v4s6/612>
- [13] Hanafie, Ahmad, Andi Haslinah, Qalamin Qalaman, and Akbar Made. "PERMODELAN KARAKTERISTIK BIODIESEL DARI MINYAK JELANTAH." *ILTEK: Jurnal Teknologi* 12, no. 02 (2017): 1775-1779. <https://doi.org/10.47398/iltek.v12i02.89>
- [14] Kusumaningtyas, Ratna Dewi, Haniif Prasatiawan, Brylian Rizky Pratama, Dani Prasetya, and Anwaruddin Hisyam. "Esterification of Non-edible Oil Mixture in Reactive Distillation Column over Solid Acid Catalyst: Experimental and Simulation Study." *Journal of Physical Science* 29 (2018): 215-226. <https://doi.org/10.21315/jps2018.29.s2.17>
- [15] Kumar, Ashwani, and Satyawati Sharma. "Potential non-edible oil resources as biodiesel feedstock: an Indian perspective." *Renewable and Sustainable Energy Reviews* 15, no. 4 (2011): 1791-1800. <https://doi.org/10.1016/j.rser.2010.11.020>
- [16] Oo, Ye Min, Makatar Wae-hayee, and Chayut Nuntadusit. "Experimental and Numerical Study on the Effect of Teardrop Dimple/Protrusion Spacing on Flow Structure and Heat Transfer Characteristics." *Journal of Advanced Research in Experimental Fluid Mechanics and Heat Transfer* 2, no. 1 (2020): 17-32. <https://doi.org/10.1016/j.ijheatmasstransfer.2015.01.055>
- [17] Alawi, Omer A., and Haslinda Mohamed Kamar. "Performance of Solar Thermal Collector Using Multi-Walled Carbon Nanotubes: Simulation Study." *Journal of Advanced Research in Micro and Nano Engineering* 2, no. 1 (2020): 12-21.
- [18] Taib, Norhidayah Mat, Mohd Radzi Abu Mansor, and Wan Mohd Faizal Wan Mahmood. "Simulation of Hydrogen Combustion in Neon-Oxygen Compression Ignition Engine." *CFD Letters* 12, no. 12 (2020): 1-16. <https://doi.org/10.37934/cfdl.12.12.116>
- [19] kadhim Sharaf, Hussein, Nawal Aswan Abdul Jalil, and Sadeq Salman. "A simulation on the effect of ultrasonic vibration on ultrasonic assisted soldering of Cu/SAC305/Cu joint." *Journal of Advanced Research in Applied Mechanics* 36, no. 1 (2017): 1-9.
- [20] Souza, Thib rio PC, Luiz Stragevitch, Augusto Knoechelmann, Jose GA Pacheco, and Jose MF Silva. "Simulation and

- preliminary economic assessment of a biodiesel plant and comparison with reactive distillation." *Fuel processing technology* 123 (2014): 75-81. <https://doi.org/10.1016/j.fuproc.2014.02.004>
- [21] Smejkal, Quido, and M. Šoóš. "Comparison of computer simulation of reactive distillation using ASPEN PLUS and HYSYS software." *Chemical Engineering and Processing: Process Intensification* 41, no. 5 (2002): 413-418. [https://doi.org/10.1016/S0255-2701\(01\)00160-X](https://doi.org/10.1016/S0255-2701(01)00160-X)
- [22] Pirola, Carlo, Federico Galli, Michele Corbetta, and Flavio Manenti. "Robust kinetic modeling of heterogeneously catalyzed free fatty acids esterification in monophasic liquid/solid packed bed reactor: rival model discrimination." *Clean Technologies and Environmental Policy* 17, no. 5 (2015): 1139-1147. <https://doi.org/10.1007/s10098-015-0925-x>
- [23] Gerbaud, Vincent, and Ivonne Rodriguez-Donis. "Advances in Extractive Distillation." *Reference Module in Chemistry, Molecular Sciences and Chemical Engineering*, 2019. <https://doi.org/10.1016/b978-0-12-409547-2.05949-7>
- [24] Mengyu, G. A. N., P. A. N. Deng, M. A. Li, Y. U. E. En, and H. O. N. G. Jianbing. "The kinetics of the esterification of free fatty acids in waste cooking oil using Fe₂(SO₄)₃/C catalyst." *Chinese Journal of Chemical Engineering* 17, no. 1 (2009): 83-87. [https://doi.org/10.1016/S1004-9541\(09\)60037-9](https://doi.org/10.1016/S1004-9541(09)60037-9)
- [25] Talebian-Kiakalaieh, Amin, Nor Aishah Saidina Amin, Alireza Zarei, and Iman Noshadi. "Transesterification of waste cooking oil by heteropoly acid (HPA) catalyst: optimization and kinetic model." *Applied Energy* 102 (2013): 283-292. <https://doi.org/https://doi.org/10.1016/j.apenergy.2012.07.018>
- [26] Kusumaningtyas, Ratna Dewi, Naomi Ratrianti, Indah Purnamasari, and Arief Budiman. "Kinetics study of Jatropha oil esterification with ethanol in the presence of tin (II) chloride catalyst for biodiesel production." In *AIP Conference Proceedings*, vol. 1788, no. 1, p. 030086. AIP Publishing LLC, 2017. <https://doi.org/10.1063/1.4968339>

Congratulations, your paper is now available in SCOPUS!

Nor Azwadi <azwadi@akademiabaru.com>


Fri, Jun 24, 2022 at 1:37 PM

To: ratnadewi.kusumaningtyas@mail.unnes.ac.id, andredianata12@gmail.com, yoshuawira1@gmail.com, haniif.prasetiawan@mail.unnes.ac.id, pragusti.nanggala@students.unnes.ac.id, istadi@live.undip.ac.id

Congratulations, your paper is now available in SCOPUS!

Dear Ratna Dewi Kusumaningtyas, Andre Dianata Hogi Kusuma, Yoshua Wira Putra Budiono, Haniif Prasetiawan, Pragusti Lintang Adhi Nanggala, I Istadi,

Your published work in the [Journal of Advanced Research in Fluid Mechanics and Thermal Sciences](#), volume 94, no. 1.,

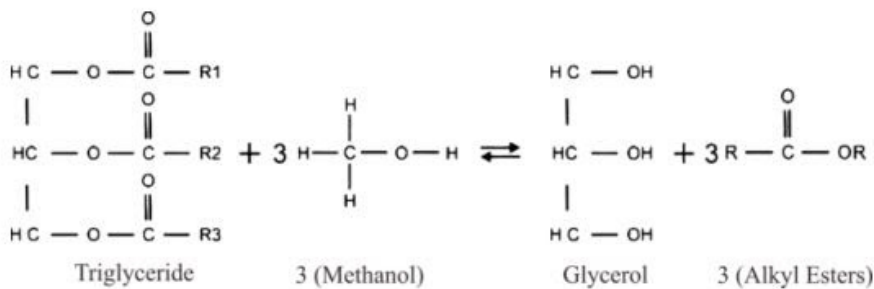
Biodiesel Production from Used Cooking Oil Using Integrated Double Column Reactive Distillation: Simulation Study

is now available in SCOPUS database ([Click here](#)).

Ratna Dewi Kusumaningtyas, Andre Dianata Hogi Kusuma, Yoshua Wira Putra Budiono, Haniif Prasetiawan, Pragusti Lintang Adhi Nanggala, & I Istadi. (2022). Biodiesel Production from Used Cooking Oil Using Integrated Double Column Reactive Distillation: Simulation Study. *Journal of Advanced Research in Fluid Mechanics and Thermal Sciences*, 94(1), 152–162. <https://doi.org/10.37934/arfmts.94.1.152162>

Promote your works to boost your citation count. You may consider the following techniques:

- Use social media. Provide links to your papers on social media (e.g., Facebook, Twitter, Academia.edu, ResearchGate, Mendeley) and your university profile page.
 - Talk to other researchers about your paper, and email copies of your paper to researchers who may be interested.
- Create a blog or a website dedicated to your research and share it.
- Cite your own past papers as appropriate to increase visibility of your published papers.

Thank you again for publishing with us. We wish you the best success with your research.

Kind regards

"SHARE YOUR KNOWLEDGE FOR A BETTER TOMORROW"

SEMARAK ILMU PUBLISHING
 NO. 22, Jalan Puteri 5A/3,
 Bandar Puteri Bangi, 43000 Kajang,
 Selangor, MALAYSIA



INTERNATIONAL CONFERENCE ON COMPUTATIONAL HEAT TRANSFER AND FLUID MECHANICS

https://semarakilmu.com.my/journals/index.php/fluid_mechanics_thermal_sciences/announcement/view/2

INTERNATIONAL CONFERENCE ON COMPUTATIONAL HEAT TRANSFER AND FLUID MECHANICS

30 - 31st July 2022

EVERLY HOTEL PUTRAJAYA, MALAYSIA

The aim of **International Conference on Computational Heat Transfer and Fluid Mechanics** is to become the leading annual conferences in the fields related to computational heat transfer and fluid mechanics. The goal of the conferences is to gather scholars, researchers, and scientists from all over the world to present advances in their research fields and to foster an environment conducive to exchanging ideas and information.

Publications

- Participants are expected to submit an **extended abstract** with maximum of **6 pages**. The **extended abstract** will be published in the following Google Scholar Indexed of Akademia Baru journal.
 - [Journal of Advanced Research in Numerical Heat Transfer](#)
- All authors are then encouraged to submit their **Full paper** with more than 8 pages for **SCOPUS indexed** publication with **DOI**
- ◦ [CFD Letters](#)

Certificate will be given to the best paper and the best presenter of each session

Conference Fee and Publication

- Publication in Google Scholar journal (extended abstract) only (**local: RM350, International: USD100**) or
- Publication in SCOPUS indexed journal (full paper) only (**local: RM1000, International: USD300**) or
- Publication in Google Scholar journal (extended abstract) and SCOPUS indexed journal (full paper) (**local: RM1350, International: USD350**)

Sub-Theme

- Architecture
- Biological Flows
- Biology
- Boiling and Evaporation
- Chemistry
- Compressible Flows
- Computational Heat Transfer
- Computer Science
- Condensation
- Drops and Bubbles
- Electrohydrodynamics
- Engineering Flows
- Environmental
- Environmental Heat Transfer
- Gas Turbines
- Geology, Engineering
- Geophysical flows
- Health Science
- Heat Exchangers
- Heat Pipes
- Heat Transfer in Combustion and Engines
- Magnetohydrodynamics
- Mathematics and Statistics
- Medicine

- Microscale Flows
- Multiphase Flows
- Nanofluids
- Natural and Technological Sciences
- Particle - Laden Flows
- Physics
- Reactive Flows
- Rotating Flows
- Single Phase Heat Transfer
- Superfluids
- Turbulence

LANGUAGES

- English

Deadlines:

- Abstract Submission Deadline: 31 May 2022
- Notification of Abstract Acceptance: 15 June 2022
- Extended Abstract Submission Deadline: 15 July 2022
- Full Paper Submission Deadline: 20 July 2022
- Payment Deadline: 20 July 2022
- Early bird Payment Deadline: 30 June 2022 (Discount 5% of conference fee)

Types of Participation

- Physical presentation at conference site (Everly Hotel, Putrajaya, Malaysia) **or**
- Recorded video presentation **or**
- No presentation, paper for publication only

[SUBMIT YOUR ABSTRACT NOW \(CLICK HERE\)](#)**Conference Program****Day 1: 30 July 2022**

8 - 9am: Registration

9 - 915am: Welcoming Speech by Conference Chair

915 - 10am: Keynote Speech

10 - 1015am: Break

1015 - 1pm: Research presentation session 1

1 - 2pm: Lunch

2 - 6pm: Research presentation session 2

Day 2: 31 July 2022

Visit to **Intelligent Garden City of Putrajaya, Malaysia**

Organizer

Semarak Ilmu Publishing & Akademia Baru Publishing

Contact us:

Dr. Nor Azwadi Che Sidik

Email: azwadi@akademiabaru.com, Tel:+60177541097

"SHARE YOUR KNOWLEDGE FOR A BETTER TOMORROW"

--

8/14/22, 8:29 PM

UNNES Mail - Congratulations, your paper is now available in SCOPUS!

SEMARAK ILMU PUBLISHING
NO. 22, Jalan Puteri 5A/3,
Bandar Puteri Bangi, 43000 Kajang,
Selangor, MALAYSIA