

# 19\_Kampas Rem\_J Natural Fibers.pdf

*anonymous marking enabled*

---

**Submission date:** 21-Mar-2023 01:19PM (UTC+0700)

**Submission ID:** 2042475175

**File name:** 19\_Kampas Rem\_J Natural Fibers.pdf (4.03M)

**Word count:** 6394

**Character count:** 33049



## The Effects of Natural Fiber Orientations on the Mechanical Properties of Brake Composites

Sutikno Madnasri , Gudel Astika & Putut Marwoto

To cite this article: Sutikno Madnasri , Gudel Astika & Putut Marwoto (2020): The Effects of Natural Fiber Orientations on the Mechanical Properties of Brake Composites, Journal of Natural Fibers, DOI: [10.1080/15440478.2020.1838989](https://doi.org/10.1080/15440478.2020.1838989)

To link to this article: <https://doi.org/10.1080/15440478.2020.1838989>



Published online: 05 Nov 2020.



Submit your article to this journal [↗](#)



View related articles [↗](#)



View Crossmark data [↗](#)



## The Effects of Natural Fiber Orientations on the Mechanical Properties of Brake Composites

Sutikno Madnasri, Gudel Astika, and Putut Marwoto

Physics Department, Faculty of Mathematics and Natural Sciences, Universitas Negeri Semarang, Semarang, Indonesia

### ABSTRACT

This research aims to study the usage of natural fibers as composite reinforcement and their effects on mechanical properties. Because asbestos fibers have negative impacts on the environment and public health, in the manufacture of brake composites they were replaced with natural fibers. Compared to synthetic fibers, natural fibers are cheaper, higher manufacturability, and a better contributor to mechanical properties. Pineapple leaf fibers were prepared by a water retting process, and coconut and areca fibers were prepared by a separation process after drying. The samples were prepared in the different volume fraction of fibers (2 vol% – 10 vol%) and fiber orientations adjusted as random, perpendicular, and angle of 45°. They were fabricated by hot isostatic pressing method, tested using Rockwell hardness tester, wear testing machine, and universal testing machine, and characterized using scanning electron microscopy (SEM) and energy-dispersive X-ray spectroscopy (EDX). The specimen in a fiber orientation of 45° performs the strongest tensile strength. The highest hardness (68 HRN) is found in the specimen with a volume fraction of 2 vol%, the lowest wear ( $1,64 \times 10^{-4}$  mm<sup>2</sup>/kg) is obtained in the sample (10 vol%), and the highest tensile strength (14,5 MPa) is resulted by a specimen in angle orientation 45°.

### 摘要

本研究旨在探讨天然纤维作为复合增强材料的应用及其对力学性能的影响。由于石棉纤维对环境和人类健康有负面影响，在制造刹车复合材料时，石棉纤维被天然纤维取代。与合成纤维相比，天然纤维更便宜，可制造性更高，对机械性能的影响更大。以菠萝叶纤维为原料，采用水脱胶法制备了椰子和槟榔纤维。在不同纤维体积分数（2 vol%–10 vol%）下制备样品，并将纤维取向调整为随机、垂直和45°角。采用热静压法制备，用洛氏硬度计、磨损试验机和万能试验机进行试验，并用扫描电子显微镜（SEM）和能谱仪（EDX）对其进行了表征。纤维取向为45°的试样具有最强的抗拉强度。体积分数为2vol%的试样硬度最高（68hrn），磨损量最小（ $1,64 \times 10^{-4}$  mm<sup>2</sup>/kg），45°角试样的拉伸强度最高（14,5mpa）。

### KEYWORDS

Betel nut fiber; brake material; coconut fiber; composite; pineapple leaf fiber  
关键词: 槟榔纤维; 制动材料; 椰子纤维; 混合成的; 菠萝纤维

### Introduction

The natural fibers are originated from plant, animal, and mineral. The plants that can be taken its fibers include cotton, bamboo fiber, pineapple leaf fiber, banana frond fiber, coconut fiber, areca nut, and hemp fiber (Gokulkumar et al. 2019). The usage of organic fibers as reinforcement materials in eco-friendly composites, especially in the manufacture of brake composite, is expanding. Natural fibers are more desirable than synthetic fibers because they are low cost, nonabrasive during processing, recyclable, and biodegradable (George, Klompen, and Peijs 2001; George, Bhagawan, and Thomas 1998). The main constituent of natural fibers is cellulose (Doroudgarian, Pupure, and Joffe 2015). Each natural fiber consists of different constituents such as cellulose, lignin, pectin, and other

**CONTACT** Sutikno Madnasri [smadnasri@yahoo.com](mailto:smadnasri@yahoo.com) Gunungpati, Semarang 50229, Indonesia

© 2020 Taylor & Francis

materials so that they have different physical and chemical characteristics (Hazarika et al. 2015). The chemical composition of pineapple leaf fiber consists of alpha-cellulose (70.98 wt%), lignin (4.9 wt%), hemicellulose (15.34 wt%), fats and waxes (0.96 wt%), ash (0.95 wt%), and others (3.87 wt%) (Hazarika et al. 2017). Main constitution of betel nut (*areca catechu*) fiber includes alpha-cellulose (53.20%), hemicellulose (32.98%), lignin (7.20%), fat and wax (0.64%), ash (1.05%), and other materials (3.12%) (Hassan et al. 2010). In other studies, coconut fiber is used to strengthen composite materials. The coconut fiber contains cellulose (27.95 wt%), lignin (41.03 wt%), hemicellulose (19.78 wt%), attractive (8.60 wt%), and ash (1.30 wt%) (Leão et al. 2015). During its development, natural fibers have become an important component in the application of the textile, paper, packaging, and building materials industries (Ashori 2006). Natural fiber-reinforced polymer composites have great potential to replace materials derived from nonrenewable resources (Neto et al. 2015). Potential natural fibers to be developed include betel nut skin fibers, pineapple leaf fibers, and coconut fibers.

In recent years, natural fibers have become attractive to researchers, engineers, and scientists as alternative reinforcing materials in the manufacture of polymer composites that are low cost and can produce good mechanical properties, resistant to wear, and recyclable (Ashok, Srinivasan, and Basavaraj 2018). Many studies have been carried out in the development of natural cellulose fiber-reinforced bio-composites. A total of 8 *Allium sativum* fiber is used by Vineeth and Senthil (2020) to reinforce composite brake linings. Physical and mechanical properties of pineapple leaf fibers include density (1.526 g/cm<sup>3</sup>), elongation at break (3 %), and tensile strength (413–1,627 MN/m<sup>2</sup>) (Devi, Bhagawan, and Thomas 2010; George, Sreekala, and Thomas 2006; Laftah and Rahman 2016). The physical properties of a single fiber of pineapple leaves include length (3–8 mm), diameter (7–18 μm), and fineness (2.5–4 tex) (Laftah and Rahman 2016). Physical properties of a pineapple leaf fiber bundle include length (10–90 mm), fineness (2.5–5.5 mm), tenacity (20–30 cN/tex), elongation (2.4–3.4%), initial modulus (570–700 cN/tex) and density (1.543 g/cm<sup>3</sup>) (Laftah and Rahman 2016). Senthilkumar et al. (2019) use pineapple leaf fibers in polymer composites and can increase the tensile strength of 23% – 25% at a fraction of 35 vol% and also increase the modulus of elasticity at additional fiber weights of 25 wt% – 45 wt%. Ashok, Srinivasan, and Basavaraj (2018) stated that the use of betel nut skin fiber along the 10 mm as much as 30 vol% fiber can increase the tensile strength of 17 MPa – 33 MPa. Areca nuts can also be used as antioxidants and anti-bacterial agents (Shen et al. 2017). The areca catechu's average moisture, diameter, density, and tensile strength were 11.70, 0.29 mm, 0.71 g/cc, and 68 MPa, respectively (Heckadka et al. 2020). Hwang et al. (2016) used coconut fiber in the composite making and can increase crack deflection, toughness index, and flexural strength. Coconut fibers have physical properties: diameter (72 μm), linear density (58 tex), and mechanical properties: tenacity (67 cN/tex), breaking elongation (33%), specific work of rupture (42 mJ/tex-m), and initial modulus (54 N/tex) (Basu, Mishra, and Samanta 2018). The use of natural fibers as polymer matrix composite reinforcement is a good momentum because it can produce composite products with good and sustainable mechanical properties (Binoj et al. 2016). Betel nut fiber, pineapple leaf fiber, and coconut fiber can be used as alternatives to reinforcing brake pads because of its abundant availability and the price is quite cheap (Siva and Walters 2006), natural fibers are also not easily abraded and are safer than synthetic fibers (Lopattananon et al. 2006).

The mechanical behaviors of composites are highly dependent on the properties of the matrix and fibers and the interactions between the matrix and fibers (Sreekala et al. 2002). There are several main problems to be solved in this study, including optimization of the content of natural fibers in composite materials, assessing the effects of fiber types, and short fiber orientations on the mechanical properties of composite brake pads. This research was conducted by referring to the research roadmap for biocomposite brake development as shown in Figure 1. The organic materials were extracted and the wastes were recycled and processed into composite brake friction materials. The effects of orientation of several natural fibers on friction and wear of composite brake linings have been reported by several previous researchers (Alshammari et al. 2018; Milosevic, Valásek, and Ruggiero 2020). This study specifically examines the effects of natural fiber orientations on the tensile strength of composite brake linings. Here, three types of natural fibers were used separately and the results are compared.

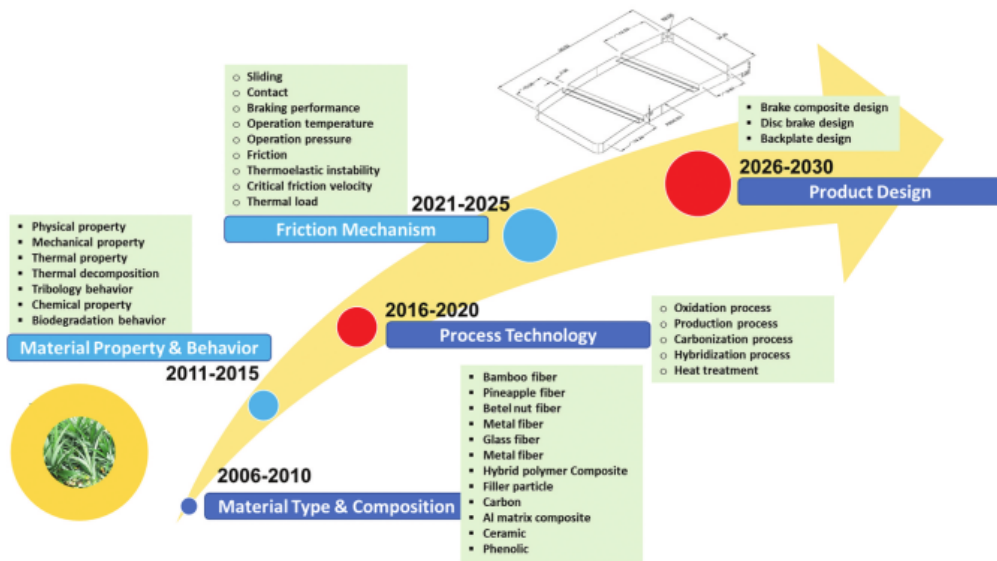


Figure 1. Research roadmap of eco-brake composite development.

## Materials and method

### Fiber extraction

Fibers were taken from local plants in Semarang, Indonesia, namely pineapple (*Ananas Comosus (L) Merr*) thin-leaf Queen type, areca catechu, and coconut (*Cocos nucifera*). In the separation of pineapple leaf fibers, the method used was water retting and scraping. The sodium hydroxide (NaOH, 50%) solution was supplied from Sigma Aldrich and then it's diluted to 5%. The water retting process was done by inserting pineapple leaves into a 5% NaOH solution for 10 h. The use of a base solution is to accelerate the process of softening cellulose. Pineapple leaves that have undergone a water retting process were then scraped using a plate or knife to remove substances that were still attached to the fiber so that the pineapple leaf fibers became strands of fibers. The fibers that have been formed were then washed and dried.

The making of coconut fibers was done by drying coconut skin for 2 days – 7 days. Dry coconut skin soaked in clean water for 5 mins, this was done to facilitate the separation of fibers. The process of making betel nut fibers was almost the same as making coconut fibers because the



Figure 2. Fiber separation results: (a) Areca nut skin fiber, (b) Pineapple leaf fiber, and (c) Coconut fiber.

texture of the two fibers has similarities, the only difference in the drying time of betel nut which was 2 days – 4 days. The produced natural fibers were shown in Figure 2.

### Composite preparation

The composite brake lining was fabricated by a hot isostatic pressing method. The binding material (Araldite 506 epoxy resin, Shen Zhen Nanganghengshun Trading Co. Ltd.) as a matrix, natural fiber, and filler materials including metal powder, glass powder, and coconut shell powder were mixed until homogeneous (Sutikno, Marwoto, and Rustad 2010). Epoxy resin was chosen as a binder in brake lining composites because it has a higher strength than other polymers (Pupure, Doroudgarian, and Joffe 2014). Metal powders such as copper, brass, and bronze powders were taken from a local supplier (Pudak Scientific, Bandung, Indonesia). Glass powders (200 mesh) were made of glass wastes taken from a local supplier (Jakarta, Indonesia) and coconut shell carbon powders (Borneo activated carbon, 5% moisture) were also taken from a local supplier (Kalimantan, Indonesia). The fibers were cut to 2 mm each. The volume fraction of the fibers in the mixture of brake ingredients was made of 2 vol% up to 10 vol%. The orientation directions of the fibers were manually adjusted using the help of masks, where the masks were made based on the designs of mutually perpendicular orientation patterns and forming 45° angles to each other. Specimens with random fiber orientation were made without the aid of a mask. Each specimen was made of one type of natural fibers and does not contain synthetic fibers. The use of masks was also to facilitate the alignment between the fiber layers (Pupure, Doroudgaria and Joffe 2014). The mixing results were then pressed using a press machine with a load of 50 kN at a temperature of 160°C for 3 h. Tensile test specimens were made by varying the orientations of the fibers namely random orientation, perpendicular orientation (George et al. 1998), and orientation of 45° according to Figure 3. The two natural fiber orientation patterns, perpendicular, and 45° angle were set manually using masks, while the random orientation was made without a mask.

### Characterizations of brake composite microstructures

Observation of the microstructure of the friction surface, fiber dimension, and composition of the specimen was performed using SEM-EDX Phenom Pro-X. The specimens for the SEM study were polished and coated by Gold-Palladium alloy following standard 94 procedure. Brake composite consists of multi ingredients and in this study, the content of each ingredient was arranged based on volume fraction. Observation of the microstructures of brake lining specimens using SEM was carried out at several magnifications (400–3000x) according to the need to obtain a clear image. EDX was used to determine the elemental composition of the friction material.

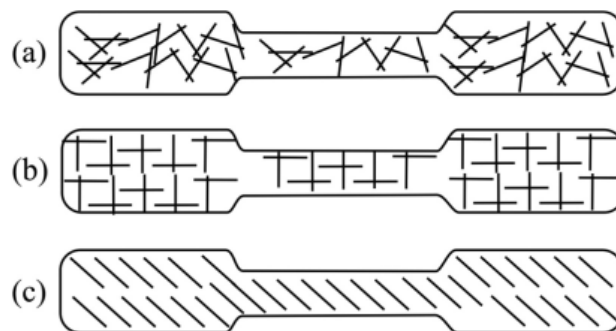


Figure 3. Tensile test specimens with orientations: (a) random, (b) perpendicular, and (c) 45° angle.

### Mechanical properties testing of brake composite specimens

The specimens that have been formed were tested for their mechanical properties in the form of hardness tests using Rockwell Hardness (XHR-150), wear using Ogoshi High-Speed Universal Wear Testing Machine Type OAT-U, and strength using Tensile Testing Machine Servo pulse with a load of 20 kN.

Hardness testing aims to determine the measured value of hardness in the brake pad composite specimens. The hardness testing method used was the Rockwell B hardness test ASTM E10-01. In the Rockwell B (HRB) hardness test, a load of 98.07 N was initially applied to the indenter. After the initial load was applied, it was followed by giving an additional burden to the identifier until it reached a total load of 980.7 N (Ma, Low, and Song 2002). Within a certain period, after the maximum load was applied, the load is released until it returns to the initial load of 98.07 N.

Wear testing was carried out to determine the level of wear of a specimen due to continuous mechanical movement using SNI 09-0143-1987. This test referred to the Reiken Ogoshi method (revolving disc), with the width of the disc plate used, which was 3 mm, the radius of the plate 14 mm wear, the compressive force of wear 6.36, the wear distance of 200 m, and the time of testing 60 s. The width of the wear on the test specimen was measured using a microscope at magnification 100X.

A tensile strength test aimed to determine the mechanical properties of the brake pad specimens against tensile loads including tensile strength, flexibility, and length increase in response to external forces based on ASTM E8. Tensile testing was done by loading the specimen in the direction of the test machine or longitudinally. In this study, the variation in the orientation of the fiber toward the direction of the load force was used as an independent variable and, the tensile strength and elasticity as the dependent variable.

## Results and discussion

### Hardness numbers of brake composites

The results of Rockwell hardness testing of composite brake lining reinforced betel nut skin fiber, pineapple leaf fiber, and coconut fibers at different volume fractions are shown in Figure 4. The test results show that the increasing volume of natural fiber is inversely proportional to its hardness value. The higher the fiber volume fraction causes the level of hardness to decrease, conversely the number of fiber volume fractions decreases the greater the hardness of the specimen. Brake lining with coconut fiber ingredient contributes to greater hardness than the use of other fibers. The use of pineapple leaf

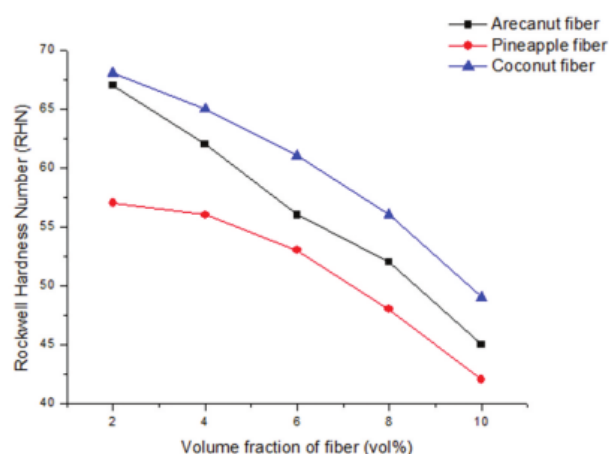


Figure 4. Rockwell hardness numbers for natural fibers-reinforced brake composite at different volume fractions of fibers.

fibers in the specimen gives the smallest hardness value, while the use of betel nut skin fibers produces a hardness value between the two. The test results showed that the specimens containing 2 vol% coconut fibers had the highest hardness value (68 HRB), while the lowest hardness value, 42 HRB, was found at the specimens using pineapple leaf fiber ingredient. The difference in the hardness number is caused by plastic and elastic deformation during compaction. Specimens with smaller natural fiber content tend to produce greater densities so that the transfer of forces between the particles in them becomes large (Maleque et al. 2012). When the fiber volume fraction increased, the glass powder volume fraction lowered.

### Wear of brake composites

The results of wear testing of natural fiber-reinforced composite brake pads at different volume fractions are shown in Figure 5. The results of wear tests in Figure 5 show that an increase in wear value in the specimen is in linear relation with the increase in natural fiber volume fraction. Specimens with higher fiber fraction have larger wear values while specimens with lower fiber fraction wear values tend to be smaller. The highest level of wear observed in the specimens of brake lining with a fiber volume fraction of 10 vol% and the lowest wear is owned by brake lining with a fiber fraction of 2 vol%. This level of wear is inversely proportional to the level of hardness. The wear test curve shows the tendency of the wear curve more toward the positive while the hardness value forms the curve in the negative direction. The curves of both the hardness and wear test show that the smaller the level of hardness of the specimen, the greater the specimen wear. This increased wear value is due to a large amount of material lost due to a lack of bonding between the constituent particles during the friction process. The use of pure fibers without treatment allows adhesion forces between the constituent particles to be blocked because there are still many layers of lignin that cover the surface of the fiber (Kumar 2010). When the volume of fiber continues to increase and friction occurs in the specimen, the material that previously functioned as a reinforcement material is not optimal so that the specimen will be easily abraded.

### Tensile strength of brake composites

The results of the tensile test of each specimen of brake pads reinforced separately by areca nut fiber, pineapple leaf fibers, and coconut fibers are shown in Figure 6. Among the three natural fibers,

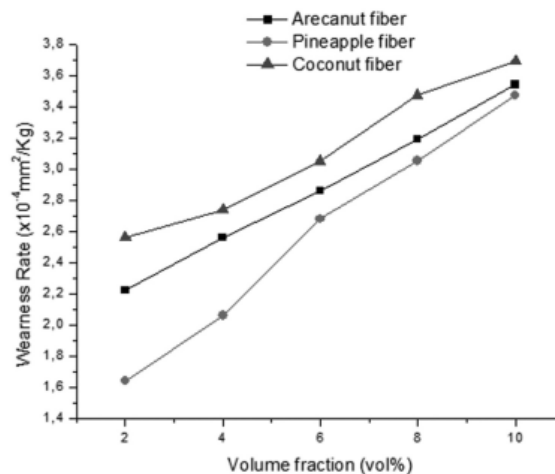
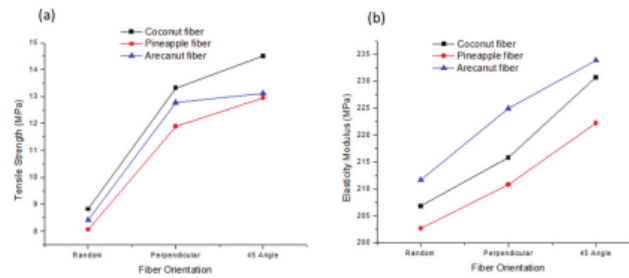


Figure 5. Wear rates of specimens at different volume fractions of fibers for each pineapple leaf, areca nut, and coconut fiber.





**Figure 6.** Tensile strengths (a) and elasticity modulus (b) of brake composites against fiber orientations for each coconut fiber, pineapple fiber, and areca nut fiber.

coconut fibers contribute the most to the strength of the friction material compared to pineapple leaf fibers and areca nut fibers, this is presumably due to the different crystallinities of celluloses for each natural fiber (Leão et al. 2015).

The tensile strengths and elasticity modulus of specimens were affected strongly by the fiber orientations. The highest tensile strength of specimen, 14.5 MPa, was owned by specimens with fiber orientation 45°, while specimens with random orientation occupy the smallest tensile strength of 8.06 MPa. The use of coconut fibers also produces greater tensile strength, followed by betel nut skin fiber, pineapple leaf fiber. The tensile strength curves in Figure 6 show that the magnitude of the elasticity value is directly proportional to the tensile strength. In general, the increase in tensile strength and modulus of elasticity is due to the presence of natural fibers which plays a role in resisting deformation (Takamizawa et al. 2018). This change occurs when the orientation direction is varied, resulting in different tensile strength. The fibers serve to strengthen the composite structure in maintaining its shape by resisting deformation. In composites where the fibers are arranged perpendicular to each other, which plays a role in restraining the rate of deformation and maintaining the shape of the composite specimen, that is, only the fibers are parallel to the tensile direction. Composites containing longitudinally oriented fibers have a higher relaxation rate than composites containing transversally oriented fibers (George et al. 1998; George, Bhagawan, and Thomas 1998). If the mixing of materials is carried out randomly, the long fibers in the composite structure tend to form local clusters with the same fiber orientation, while the shorter fibers behave more individually, making it more difficult to create transverse cracks. Shorter and thinner fibers have the advantages of being more flexible and easier to orientate (Pupure et al. 2018). Cracks are difficult to find in composites reinforced with short fibers (less than 5 mm). The degree of the load carried from the matrix to the fiber is a function of (i) the length of the fiber, which is called the length or critical aspect of the fiber ratio, (ii) fiber orientation and direction relative to each other. If fiber orientation and direction are not in line with the applied stress, bonded failure happens easily. Unidirectional fiber composites tend to transmit better external stresses, that is why hand-laid fiber composites perform better mechanically (Shesan et al. 2019).

In this study the matrix used is a type of epoxy resin, it is known that thermoplastic resins or polymers have a semicrystalline crystal structure consisting of neatly arranged polymer chains and amorphous polymer chains. When the specimen receives traction force (stress), the polymer chain will be in line with the direction of the traction load. The presence of reinforcing fibers causes the resin (matrix) to be filled with reinforcing particles so that the deformation that occurs in amorphous polymers can be minimized by reinforcing fibers. Tensile strength will increase when the stress that occurs can be transferred to the fiber, otherwise, the tensile strength will decrease if the energy transfer cannot be continued to the fiber to the maximum so that the tensile load tends to be borne by the resin. Besides it, the increased tensile strength and modulus of elasticity are also due to the better bond between the reinforcement and the matrix. Bonding between particles will cause strong adhesion forces and improve mechanical properties (Hristov et al. 2004). In general, fibers that increase composite hardness will increase

the modulus of elasticity. This is because hardness is a function of fiber volume and modulus (Srinivasan et al. 2011).

### Microstructures of brake composites

Observation of brake composite microstructures aims to determine the surface, cross-sectional structure, the particle size of the specimen constituent, and dimensions of natural fibers. The SEM images of natural fiber-reinforced composite brake linings are observed in magnifications (400–3000x) and the clear images of magnifications 3000x and 410x are shown in Figure 7.

SEM images show the existence of a micro-particle-size constituent of brake lining material and the dimensions of natural fibers used. Microstructures that have bright colors are metals that have high thermal conductivity and high hardness. In the microstructures of the brake lining specimens, the carbon element looks black while the metal elements such as Cu, Zn, Al, Mo, and Fe look brighter. The light-dark pattern formed from each phase indicates the difference in the conductivity of the material (Sutikno, Marwoto, and Rustad 2010).

Coconut fibers have the largest average width, 402.55  $\mu\text{m}$ , as seen at the SEM image in magnification of 3000x. The fibers of pineapple leaves and areca nuts have average widths of 4.12  $\mu\text{m}$  and 3.52  $\mu\text{m}$ , respectively. In Figure 6, the porosities of the composites are found and it's suspected that there is an interaction between the fibers and the matrix. The microstructures of the coconut fiber-reinforced brake composites showed fewer porosities, compared to the pineapple leaf and areca catechu fiber-reinforced brake composites. The greatest porosity was found on the surface of the pineapple leaf fiber-reinforced brake composite. As the density of composite increases, the hardness of composite increases as well. Fiber porosities and micro porosities around the fibers occurred because it was triggered by composite failures. The formation of the pores can be due to the stress transfer which removes the amorphous constituents of the fibers. The adhesion between the fibers and the composite matrix is marked with a lighter color on the outer sides of the fibers which indicate the growth of new layers and small granules appear attached to the fibers. The coated surfaces are the result of the amino-silane groups coupling with the surface hydroxyl groups of the fibers (Dharmalingam et al. 2020). This can improve the mechanical properties of brake composites (Azeez et al. 2018).

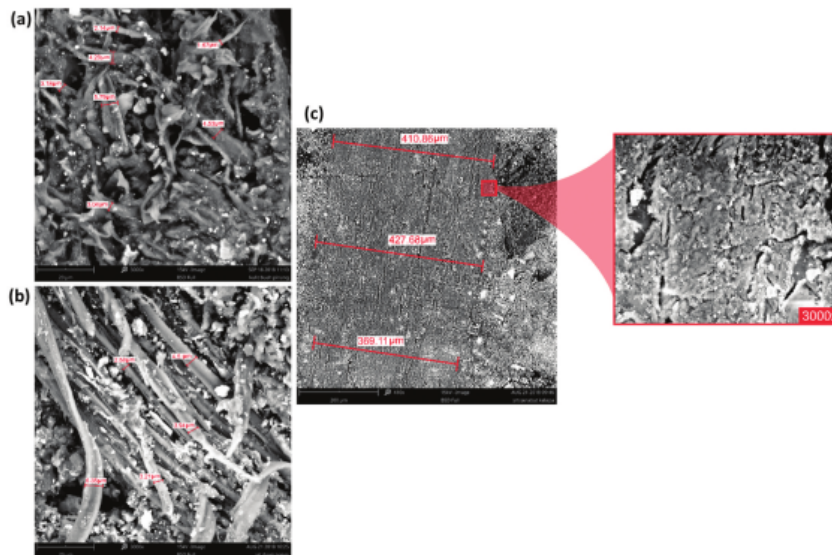


Figure 7. Microstructures of specimen surfaces of brake composites reinforced by (a) Areca nut skin fibers 850X, (b) pineapple leaf fibers 850X, and (c) coconut fibers 410X.

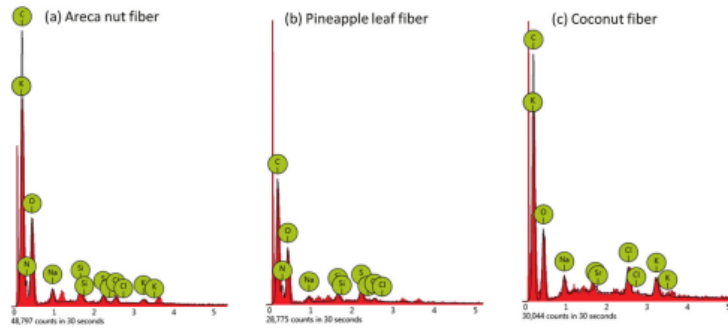


Figure 8. EDX curves of brake linings reinforced by (a) areca nut fibers, (b) pineapple leaf fibers, and (c) coconut fibers.

Table 1. The percentages of chemical elements for each brake composites using different fibers.

Elements (%)	Fibers in brake composites		
	Areca nut fiber	Pineapple leaf fiber	Coconut fiber
C	38.7	39.8	60.0
O	34.9	36.9	33.0
K	-	0.2	2.0
N	23.8	21.5	-
Na	0.9	0.9	2.1
Si	0.5	0.3	-
S	1.0	-	-
Cl	0.3	0.2	2.2
Sr	-	-	0.7

### Elemental chemical composition of brake composites

The EDX characterization aims to determine the chemical composition contained in the samples of natural fiber-reinforced composites. Figure 8 and Table 1 show the results of EDX curves of natural fiber-reinforced composites and the percentages of chemical elements contained.

The difference in the composition of the chemical elements in the EDX data can occur because the brake composite is composed of multiple ingredients, and different natural fibers are used. The nitrogen element (N) found in the composite reinforced with areca nut and pineapple leaf fibers, but not found in fiber-reinforced composites, is thought to have come from the metal powders used. This nitrogen is in the form of amino silane which comes from other ingredients of brake composites. This was confirmed by the discovery of other elements such as silicon (Si), potassium (K), sulfur (S), chlorine (Cl), and strontium (Sr). This EDX data shows that the presence of natural fibers in the specimen is still relatively dominant. The carbon is the largest element formed by natural fibers in plant tissue so that almost all samples are dominated by carbon elements, while the oxygen content in EDX analysis is mainly because of the presence of cellulose, and lignin. This inhomogeneous mixing causes porosities in the specimens. Table 1 proves that specimens with better mechanical properties have less carbon content than specimens with lower mechanical properties. Pineapple leaf fibers in this study contained a carbon element (39.8%) smaller than the results of the study of Najeeb et al. (2020) (53.56%).

### Conclusion

Based on the results and discussion it can be concluded that the less use of the natural fiber fraction results in high hardness and decreases the level of specimen wear. The best result in this testing is found at coconut fiber-reinforced brake pad specimen with 2 vol% fraction because it

conforms to SNI 09-0143-1987 specifications with a wear value of  $5 \times 10^{-4} \text{mm}^2/\text{kg} - 5 \times 10^{-3} \text{mm}^2/\text{kg}$  and hardness of  $68 \text{mm}^2/\text{kg} - 105 \text{mm}^2/\text{kg}$ . The tensile test shows the specimen with  $45^\circ$  orientation produces the highest tensile strength followed by the specimen with perpendicular and random orientation. Future work should focus on utilizing hybrid fibers in the development of brake pads and examining their effects on their mechanical properties and investigating interfacial adhesion phenomena.

## Acknowledgments

We acknowledge the support of technicians at Material Physics Laboratory, Physics Department, Faculty of Mathematics <sup>41</sup> Natural Sciences, Universitas Negeri Semarang (Unnes). This research was supported by the funding from Universitas Negeri Semarang, Ministry of Research, Technology and Higher Education, the Republic of Indonesia under the Grant of University Research Flagship, Innovation Scheme (No. SP DIPA-042.01.2.400899/2019).

1

## Disclosure statement

The authors declare no competing financial interest.

## Funding

This work was supported by the <sup>41</sup> Kementerian Riset Teknologi Dan Pendidikan Tinggi Republik Indonesia [<sup>50</sup> SP DIPA-042.01.2.400899/2019].

## References

- Alshammari, F. Z., K. H. Saleh, B. F. Yousif, A. Alajmi, A. Shalwan, and J. G. Alotaibi. 2018. The influence of fibre orientation on tribological performance of jute fibre-reinforced epoxy composites considering different mat orientations. *Tribology in Industry* 40 (3):335–48. doi:10.24874/ti.2018.40.03.01.
- Ashok, B., C. V. Srinivasan, and B. Basavaraj. 2018. A review on the mechanical properties of areca fiber-reinforced composites. *Science and Technology of Materials* 1–11. doi:10.1016/j.stmat.2018.05.004.
- Ashori, A. 2006. Nonwood fibers—a potential source of raw material in papermaking. *Polymer-Plastics Technology and Engineering* 45 (10):1133–36. doi:10.1080/03602550600728976.
- Azeez, T. O., D. O. Onukwuli, J. T. Nwabanne, and A. T. Banigo. 2018. *Cissus populnea* fiber-unsaturated polyester composites: Mechanical properties and interfacial adhesion. *Journal of Natural Fibers*. doi:10.1080/15440478.2018.1558159.
- Basu, G., L. Mishra, and A. K. Samanta. 2018. Appropriate bleaching technique for coconut fiber. *Journal of Natural Fibers*. doi:10.1080/15440478.2017.1423263.
- Binoj, J. S., R. E. Raj, V. S. Srinivasan, and G. R. Thusnavis. 2016. Morphological, physical, mechanical, chemical and thermal characterization of sustainable Indian Areca fruit husk fibers (*Areca Catechu* L.) as potential alternate for hazardous synthetic fibers. *Journal of Bionic Engineering* 13 (1):156–65. doi:10.1016/S1672-6529(14)60170-0.
- Devi, L. U., S. S. Bhagawan, and S. Thomas. 2010. Dynamic mechanical analysis of pineapple leaf/glass hybrid fiber reinforced polyester composites. *Polymer Composites* 31 (6):956–65. doi:10.1002/pc.20880.
- Dharmalingam, S., O. Meenakshisundaram, V. Elumalai, and R. S. Boopathy. 2020. An investigation on the interfacial adhesion between amine functionalized luffa fiber and epoxy resin and its effect on thermal and mechanical properties of their composites. *Journal of Natural Fibers* 1–16. doi:10.1080/15440478.2020.1726238.
- Doroudgarian, N., L. Pupure, and R. Joffe. 2015. Moisture uptake and resulting mechanical response of bio-based composites. II. composites. *Polymer Composites* 1510–19. doi:10.1002/pc.23058.
- George, J., S. S. Bhagawan, and S. Thomas. 1998a. Improved interactions in chemically modified pineapple leaf fiber reinforced polyethylene composites. *Composite Interfaces* 5 (3):201–23. doi:10.1163/156855498X00153.
- George, J., S. S. Bhagawan, and S. Thomas. 1998b. Effects of environment on the properties of low-density polyethylene composites reinforced with pineapple-leaf fibre. *Composites Science and Technology* 58 (9):1471–85. doi:10.1016/S0266-3538(97)00161-9.
- George, J., E. T. J. Klompen, and T. Peijs. 2001. Thermal degradation of green and upgraded flax fibres. *Advanced Composites Letters* 10 (2):81–88. doi:10.1177/0963693501101000205.
- George, J., M. S. Sreekala, and S. Thomas. 2001. A review on interface modification and characterization of natural fiber reinforced plastic composites. *Polymer Engineering & Science* 41 (9):1471–85. doi:10.1002/pen.10846.

- George, J., M. S. Sreekala, S. Thomas, S. S. Bhagawan, and N. R. Neelakantan. 1998. Stress relaxation behavior of short pineapple fiber reinforced polyethylene composites. *Journal of Reinforced Plastics and Composites* 17 (7):651–72. doi:10.1177/073168449801700704.
- Gokulkumar, S., P. R. Thyla, L. Prabhu, and S. Sathish. 2019. Characterization and comparative analysis on mechanical and acoustical properties of camellia sinensis/ananas comosus/glass fiber hybrid polymer composites. *Journal of Natural Fibers* 1–17. doi:10.1080/15440478.2019.1675215.
- Hassan, M. M., M. H. Wagner, H. U. Zaman, and M. A. Khan. 2010. Physico-mechanical performance of hybrid betel nut (*Areca catechu*) short fiber/seaweed polypropylene composite. *Journal of Natural Fibers* 7 (3):165–77. doi:10.1080/15440478.2010.504394.
- Hazarika, D., N. Gogoi, S. Jose, R. Das, and G. Basu. 2017. Exploration of future prospects of Indian pineapple leaf, an agro-waste for textile application. *Journal of Cleaner Production* 141:580–86. doi:10.1016/j.jclepro.2016.09.092.
- Hazarika, S. B., S. U. Choudhury, S. S. Panja, S. K. Dolui, and B. C. Ray. 2015. Natural fiber reinforced polyester-based biocomposite: Agro-waste utilisation. *Journal of Scientific and Industrial Research* 74:589–94.
- Heckadka, S. S., S. Y. Nayak, T. Joe, J. Zachariah N, S. Gupta, A. Kumar N V, and M. Matuszewska. 2020. Comparative evaluation of chemical treatment on the physical and mechanical properties of areca frond, banana, and flax fibers. *Journal of Natural Fibers*. doi:10.1080/15440478.2020.1784817.
- Hristov, V. N., S. T. Vasileva, M. Krumova, R. Lach, and G. H. Michler. 2004. Deformation mechanisms and mechanical properties of modified polypropylene/wood fiber composites. *Polymer Composites* 25 (5):521–26. doi:10.1002/pc.20045.
- Hwang, C. L., V. A. J. Tran, W. Hong, and Y. C. Hsieh. 2016. Effects of short coconut fiber on the mechanical properties, plastic cracking behavior, and impact resistance of cementitious composites. *Construction and Building Materials* 127:984–92. doi:10.1016/j.conbuildmat.2016.09.118.
- Kumar, M. A. 2010. Frictional coefficient, hardness, impact strength, and chemical resistance of reinforced sisal glass fiber epoxy hybrid composites. *Journal of Composite Materials* 44 (26):3195–202. doi:10.1177/0021998310371551.
- Laftah, W. A., and W. A. W. A. Rahman. 2016. Pulping process and the potential of using non-wood pineapple leaves fiber for pulp and paper production: A review. *Journal of Natural Fibers* 13 (1):85–102. doi:10.1080/15440478.2014.984060.
- Leão, R. M., S. M. Luz, J. A. Araujo, and K. Novack. 2015. Surface treatment of coconut fiber and its application in composite materials for reinforcement of polypropylene. *Journal of Natural Fibers* 12 (6):574–86. doi:10.1080/15440478.2014.984048.
- Lopattananon, N., K. Panawarangkul, K. Sahakaro, and B. Ellis. 2006. Performance of pineapple leaf fiber–natural rubber composites: The effect of fiber surface treatments. *Journal of Applied Polymer Science* 102 (2):1974–84. doi:10.1002/app.24584.
- Ma, L., S. R. Low, and J. F. Song. 2002. Comparison of Rockwell B Hardness (HRB) tests using steel and tungsten carbide ball indenters. *VDI Berichte* 1685:467–72.
- Maleque, M. A., A. Atiqah, R. J. Talib, and H. Zahurin. 2012. New natural fibre reinforced aluminium composite for automotive brake pad. *International Journal of Mechanical and Materials Engineering* 7 (2):166–70.
- Milosevic, M., P. Valášek, and A. Ruggiero. 2020. Tribology of natural fibers composite materials: An overview. *Lubricants* 8 (4):42. doi:10.3390/lubricants8040042.
- Najeeb, M. I., M. T. H. Sultan, Y. Andou, A. U. M. Shah, K. Eksiler, M. Jawaaid, and A. H. Ariffin. 2020. Characterization of lignocellulosic biomass from Malaysian's Yankee pineapple AC6 toward composite application. *Journal of Natural Fibers* 1–13. doi:10.1080/15440478.2019.1710655.
- Neto, A. R. S., A. M. A. Marco, M. P. B. Raiza, and S. F. Alessandra. 2015. Comparative study of 12 pineapple leaf fiber varieties for use as mechanical reinforcement in polymer composites. *Industrial Crops and Products* 68–78. doi:10.1016/j.indcrop.2014.10.042.
- Pupure, L., N. Doroudgarian, and R. Joffe. 2014. Moisture uptake and resulting mechanical response of biobased composites. I. Constituents. *Polymer Composites* 1151–59. doi:10.1002/pc.22762.
- Pupure, L., J. Varna, R. Joffe, F. Berthold, and A. Miettinen. 2018. Mechanical properties of natural fiber composites produced using dynamic sheet former. *Wood Material Science & Engineering*. doi:10.1080/17480272.2018.1482368.
- Senthilkumar, K., N. Saba, M. Chandrasekar, M. Jawaaid, N. Rajini, and O. Y. Allothman. 2019. Evaluation of mechanical and free vibration properties of the pineapple. *Construction and Building Materials* 195:423–31. doi:10.1016/j.conbuildmat.2018.11.081.
- Shen, X., W. Chen, Y. Zheng, X. Lei, M. Tang, H. Wang, and F. Song. 2017. Chemical composition, antibacterial and antioxidant activities of hydrosols from different parts of *Areca Catechu* L. and *Cocos Nucifera* L. *Industrial Crops and Products* 110–19. doi:10.1016/j.indcrop.2016.11.053.
- Shesan, O. J., A. C. Stephen, A. C. Chioma, R. Neerish, and S. E. Rotimi. 2019. Improving the mechanical properties of natural fiber composites for structural and biomedical applications. *Composites from Renewable and Sustainable Materials* 1–27. doi:10.5772/intechopen.85252.
- Silva, E. C. N., and M. C. Walters. 2006. Modeling bamboo as a functionally graded material: Lessons for the analysis of affordable materials. *Journal of Materials Science* 41 (21):6991–7004. doi:10.1007/s10853-006-0232-3.

- Sreekala, M. S., J. George, M. G. Kumaran, and S. Thomas. 2002. The mechanical performance of hybrid phenol-formaldehyde-based composites reinforced with glass and oil palm fibres. *Composites Science and Technology* 62 (3):339–53. doi:10.1016/S0266-3538(01)00219-6.
- Srinivasan, M., C. Loganathan, V. Balasubramanian, Q. B. Nguyen, M. Gupta, and R. Narayanasamy. 2011. Feasibility of joining AZ31B magnesium metal matrix composite by friction welding. *Materials & Design* 32 (3):1672–76. doi:10.1016/j.matdes.2010.09.028.
- Sutikno, M., P. Marwoto, and S. Rustad. 2010. The mechanical properties of carbonized coconut char. *Carbon* 48 (12):3616–20. doi:10.1016/j.carbon.2010.06.015.
- Takamizawa, T., A. Imai, R. Sugimura, A. Tsujimoto, R. M. Ishii, T. Saito, and M. Miyazaki. 2018. Interrelation among the handling, mechanical, and wear properties of the newly developed. *Journal of the Mechanical Behavior of Biomedical Materials* 1–32. doi:10.1016/j.jmbbm.2018.09.019.
- Vineeth, K. V., and K. S. Senthil. 2020. Characterization of various properties of chemically treated allium sativum fiber for brake pad application. *Journal of Natural Fibers* 1–13. doi:10.1080/15440478.2020.1745130.

## ORIGINALITY REPORT

10%

SIMILARITY INDEX

6%

INTERNET SOURCES

7%

PUBLICATIONS

1%

STUDENT PAPERS

## PRIMARY SOURCES

- |   |   |      |
|---|---|------|
| 1 | <a href="https://daneshyari.com">daneshyari.com</a><br>Internet Source  | <1 % |
| 2 | Pintu Pandit, Ritu Pandey, Kunal Singha, Sanjay Shrivastava, Vandana Gupta, Seiko Jose. "Chapter 1 Pineapple Leaf Fibre: Cultivation and Production", Springer Science and Business Media LLC, 2020<br>Publication        | <1 % |
| 3 | <a href="https://erepo.unud.ac.id">erepo.unud.ac.id</a><br>Internet Source  | <1 % |
| 4 | <a href="https://journal.kurasinstitute.com">journal.kurasinstitute.com</a><br>Internet Source  | <1 % |
| 5 | A. Vinod, M.R. Sanjay, Suchart Siengchin. "Recently explored natural cellulosic plant fibers 2018–2022: A potential raw material resource for lightweight composites", Industrial Crops and Products, 2023<br>Publication | <1 % |
| 6 | DR Petersen, RE Link, L Ma, SR Low, J Song. "Finite-Element Modeling and Experimental Comparisons of the Effects of Deformable Ball Indenters on Rockwell B Hardness  | <1 % |

Tests", Journal of Testing and Evaluation,  
2003

Publication

---

7 Hasan Koruk, Garip Genc, Huseyin Yuce.  
"Jute and luffa fibers: Physical, acoustical,  
and mechanical properties", Elsevier BV,  
2023  
Publication

---

8 Liva Pupure, Janis Varna, Roberts Joffe,  
Fredrik Berthold, Arttu Miettinen.  
"Mechanical properties of natural fiber  
composites produced using dynamic sheet  
former", Wood Material Science &  
Engineering, 2018  
Publication

---

9 Submitted to Pondicherry University  
Student Paper

---

10 Submitted to Queen Mary and Westfield  
College  
Student Paper

---

11 bhxb.buaa.edu.cn  
Internet Source

---

12 Liu, Wen, Lu Luo, Shilang Xu, and Honghua  
Zhao. "Effect of fiber volume fraction on  
crack propagation rate of ultra-high  
toughness cementitious composites",  
Engineering Fracture Mechanics, 2014.  
Publication

---



13 Submitted to Universitas Muhammadiyah Surakarta Student Paper <1 %

---

14 Submitted to Universitas Negeri Semarang Student Paper <1 %

---

15 mail.scialert.net Internet Source <1 %

---

16 www.kpriet.ac.in Internet Source <1 %

---

17 www.zarbatuk.com Internet Source <1 %

---

18 候洵 候洵. "Influence of  $\text{Yb}^{3+}$  Concentration on the Fluorescence Emission of  $\text{Tm}^{3+}$  in  $\text{Tm}^{3+}/\text{Yb}^{3+} : \text{LaF}_3$  Nanoparticals", ACTA PHOTONICA SINICA, 2010  
Publication <1 %

---

19 Srinivas Shenoy Heckadka, Suhas Yeshwant Nayak, Thomas Joe, Jacob Zachariah N, Sonia Gupta, Anil Kumar N V, Marta Matuszewska. "Comparative Evaluation of Chemical Treatment on the Physical and Mechanical Properties of Areca Frond, Banana, and Flax Fibers", Journal of Natural Fibers, 2020  
Publication <1 %

---

20 ir.lib.nchu.edu.tw Internet Source <1 %

---

21	journal09.magtechjournal.com Internet Source	<1 %
22	pt.scribd.com Internet Source	<1 %
23	www.jim.org.cn Internet Source	<1 %
24	www.thefreelibrary.com Internet Source	<1 %
25	Chao-Lung Hwang, Vu-An Tran, Jhih-Wei Hong, You-Chuan Hsieh. "Effects of short coconut fiber on the mechanical properties, plastic cracking behavior, and impact resistance of cementitious composites", Construction and Building Materials, 2016 Publication	<1 %
26	M.I. Misnon, M.M. Islam, J.A. Epaarachchi, H. Chen, K. Goda, M.T.I. Khan. "Flammability characteristics of chemical treated woven hemp fabric reinforced vinyl ester composites", Science and Technology of Materials, 2018 Publication	<1 %
27	Marko Milosevic, Petr Valášek, Alessandro Ruggiero. "Tribology of Natural Fibers Composite Materials: An Overview", Lubricants, 2020 Publication	<1 %

28

Prajapati Naik, Smitirupa Pradhan, Samir Kumar Acharya, Prasanta Sahoo. "Effect of Carbonization of Orange Peel Particulate-Reinforced Polymer Composites", International Journal of Surface Engineering and Interdisciplinary Materials Science, 2022  
Publication

&lt;1 %

29

doi.org  
Internet Source

&lt;1 %

30

multimedia.elsevier.es  
Internet Source

&lt;1 %

31

ncsu.edu  
Internet Source

&lt;1 %

32

www.123aabbcc.com  
Internet Source

&lt;1 %

33

周炳琨 周炳琨. "Microstructure and Properties of Laser Melted Layer of AZ31B Magnesium Alloy at Extreme Cooling Condition", Chinese Journal of Lasers, 2011  
Publication

&lt;1 %

34

L Prabhu, V Krishnaraj, S Gokulkumar, S Sathish, MR Sanjay, S Siengchin. "Mechanical, chemical and sound absorption properties of glass/kenaf/waste tea leaf fiber-reinforced hybrid epoxy composites", Journal of Industrial Textiles, 2020  
Publication

&lt;1 %

35

P.S. Sarath, Rakesh Reghunath, Józef T. Haponiuk, Sabu Thomas, Soney C. George. "Introduction: A journey to the tribological behavior of polymeric materials", Elsevier BV, 2023

Publication

---

<1 %

36

R. M. N. Arib, S. M. Sapuan, M. A. M. M. Hamdan, M. T. Paridah, H. M. D. K. Zaman. "A Literature Review of Pineapple Fibre Reinforced Polymer Composites", Polymers and Polymer Composites, 2018

Publication

---

<1 %

37

Sunan Saikrasun, Darawan Yuakkul, Taweechai Amornsakchai. "Thermo-oxidative stability and remarkable improvement in mechanical performance for styrenic-based elastomer composites contributed from silane-treated pineapple leaf fiber and compatibilizer", International Journal of Plastics Technology, 2017

Publication

---

<1 %

38

Tamil Moli Loganathan, Mohamed Thariq Hameed Sultan, Mohammad Jawaid, Ain Umaira Md Shah et al. "Physical, Thermal and Mechanical Properties of Areca Fibre Reinforced Polymer Composites — An Overview", Journal of Bionic Engineering, 2020

Publication

---

<1 %

39	Internet Source	<1 %
40	<a href="http://Inbr.cnpem.br">Inbr.cnpem.br</a> Internet Source	<1 %
41	<a href="http://media.neliti.com">media.neliti.com</a> Internet Source	<1 %
42	<a href="http://scitechvista.nat.gov.tw">scitechvista.nat.gov.tw</a> Internet Source	<1 %
43	<a href="http://teraweb.org">teraweb.org</a> Internet Source	<1 %
44	<a href="http://www.cellulosechemtechnol.ro">www.cellulosechemtechnol.ro</a> Internet Source	<1 %
45	<a href="http://www.frontiersin.org">www.frontiersin.org</a> Internet Source	<1 %
46	<a href="http://www.psgcas.ac.in">www.psgcas.ac.in</a> Internet Source	<1 %
47	<a href="http://xxtcl.sxicc.ac.cn">xxtcl.sxicc.ac.cn</a> Internet Source	<1 %
48	Hiral H. Parikh, Piyush P. Gohil. "chapter 7 Composites as TRIBO Materials in Engineering Systems", IGI Global, 2015 Publication	<1 %
49	L. Uma Devi, S. S. Bhagawan, Sabu Thomas. "Mechanical properties of pineapple leaf fiber-reinforced polyester composites", Journal of Applied Polymer Science, 1997 Publication	<1 %

50

Z Abidin, F Rokhman, A Syaifudin, M Subagja. "Elena as a learning management system for supporting blended learning: Do students perceive Elena as useful?", Journal of Physics: Conference Series, 2020

Publication

<1 %

---

Exclude quotes On

Exclude matches Off

Exclude bibliography On

# 19\_Kampus Rem\_J Natural Fibers.pdf

---

## GRADEMARK REPORT

---

FINAL GRADE

**/0**

GENERAL COMMENTS

**Instructor**

---

PAGE 1

---

PAGE 2

---

PAGE 3

---

PAGE 4

---

PAGE 5

---

PAGE 6

---

PAGE 7

---

PAGE 8

---

PAGE 9

---

PAGE 10

---

PAGE 11

---

PAGE 12

---

PAGE 13

---