

# Influence Of Annealing Temperature On The Morphology And Crystal Structure Of Ga-Doped ZnO Thin Films

*by Sugianto Fisika*

---

**Submission date:** 11-Apr-2023 02:49PM (UTC+0700)

**Submission ID:** 2061390035

**File name:** 34.\_Influence\_of\_annealing\_temperature\_on\_the.pdf (1.1M)

**Word count:** 1857

**Character count:** 9394

PAPER · OPEN ACCESS

## Influence of annealing temperature on the morphology and crystal structure of Ga-doped ZnO thin films

To cite this article: Sulhadi *et al* 2019 *J. Phys.: Conf. Ser.* **1170** 012066

View the [article online](#) for updates and enhancements.

### You may also like

- [Growth and Characterization of Sparsely Dispersed ZnO Nanowires](#)

Ting-Jen Hsueh, Cheng-Liang Hsu, Shouu-Jinn Chang *et al.*

- [Carrier Control in Polycrystalline ZnO:Ga Thin Films via Nitrogen Implantation](#)

K. S. Shtereva, I. Novotny, V. Tvarozek *et al.*

- [Ion beam assisted sputter deposition of ZnO for silicon thin-film solar cells](#)

M Warzecha, D Köhl, M Wuttig *et al.*



### 244<sup>th</sup> Electrochemical Society Meeting

October 8 – 12, 2023 • Gothenburg, Sweden

50 symposia in electrochemistry & solid state science

▶ Deadline Extended!  
**Last chance to submit!**

New deadline:  
April 21  
**submit your abstract!**

## Influence of annealing temperature on the morphology and crystal structure of Ga-doped ZnO thin films

Sulhadi<sup>1</sup>, F Usriyah<sup>1</sup>, E Wibowo<sup>2</sup>, B Astuti<sup>1</sup>, Sugianto<sup>1</sup>, D Aryanto<sup>3</sup> and P Marwoto<sup>1,\*</sup>

<sup>1</sup> Physics Department, Universitas Negeri Semarang, Semarang 50229 Indonesia

<sup>2</sup> Engineering Physics, School of Electrical Engineering, Telkom University, Bandung, Indonesia

<sup>3</sup> Research Center for Physics, Lembaga Ilmu Pengetahuan Indonesia (LIPI), Serpong 15314, Indonesia

\*Corresponding author: pmarwoto@mail.unnes.ac.id

**Abstract.** Ga-doped ZnO (ZnO:Ga) thin films have been deposited on Corning glass substrates by handmade dc magnetron sputtering. The pressure and deposition time respectively were set on 500 mTorr and 60 minutes. The deposition temperature was fixed at 300°C with 30 watts of plasma power. The deposited ZnO:Ga thin films were heated at 300 °C, 350 °C, and 400 °C, respectively. The morphology and crystallinity of ZnO:Ga thin films have been observed with SEM and XRD. The observation with SEM shows that the film morphology is denser and the grain size is smaller when the temperature is increased. The crystallinity of the film increases as the annealing temperature is enhanced from 300 °C to 350 °C. However, the crystallinity of the ZnO:Ga films decreased when the annealing temperature is 400 °C.

### 1. Introduction

Transparent conductive oxides (TCO) have been widely used as optoelectronic devices such as light emitting diodes, flat-panel displays, and solar cells [1]. Indium tin oxides (ITO) have been applied for TCO because the materials have good optical transmittance characteristics, wide band gap, and high conductivity [2]. Nevertheless, ITO is considered an expensive material and poses low electrical stability [3]. Alternatively, ZnO is proposed as a substitute material for ITO because it is cheap, non-toxic, stable, and has a wide band gap [4]. But it has a weakness in term of structural and electrical properties stability [5]. To improve its structure, some researchers have grown ZnO thin films by addition of doping materials [1,6,7]. Among all doping elements, gallium (Ga) is considered as one of the most suitable for ZnO material [6,7]. Some researchers also reported that the performances of ZnO thin film could be enhanced by performing of appropriate post-deposition treatment [8,9].

Several methods have been used to growth ZnO:Ga thin films, such as metal oxide chemical vapor deposition (MOCVD) system [1], atmospheric-pressure chemical vapor deposition (APCVD) [8], pulsed laser deposition (PLD) [9], sol-gel [10,11], RF magnetron sputtering [12] and dc magnetron sputtering [6]. In the previous study, the influence of Ga-doped concentrations on the structural and optical properties of ZnO thin films was deeply investigated. We obtained that the crystallinity of ZnO film significantly enhance while the band gap is slightly decreased by the increase of Ga-doped at low Ga concentration (1 % to 2%). Continuing our previous work, in this study, the improvement of structural ZnO:Ga thin film was carried out by conducting the annealing process as post-deposition




2  
treatment. The structural of a film was studied by X-Ray Diffraction spectroscopy (XRD) while the morphology of film was observed by Scanning Electron Microscopy (SEM). All the ZnO:Ga thin films were deposited on the corning glass substrates by using a handmade dc-magnetron sputtering system.

## 2. Methods

ZnO:Ga thin films were deposited on Corning glass substrates by using handmade dc-magnetron sputtering system [6]. The sputtering target was fabricated using high-purity  $\text{Ga}_2\text{O}_3$  (99,999%) and ZnO (99,999%) powders. The Ga content in the target is 2% (wt). The target has about 25 mm diameter and 5 mm thickness. High purity (99,999%) Ar gas was used as sputtering gas. The ZnO:Ga thin films were prepared with plasma power, pressures of a chamber, temperature deposition, and deposition time are 30 W, 500 mtorr, 300 °C, 60 minutes, respectively. After deposition, the samples were annealed at the temperature of 300 °C, 350 °C and 400 °C for 20 minutes. SEM and XRD were used to investigate the effect of annealing temperature on the morphology and structure of the ZnO:Ga samples, respectively.

## 3. Result and Discussion


Effect of annealing temperature on the ZnO:Ga thin films morphology was studied by using SEM micrographs. Figure 1 shows that the surface morphology of ZnO:Ga thin films get denser with smaller grain sizes when the annealing temperature is increased from 300 °C to 400 °C.

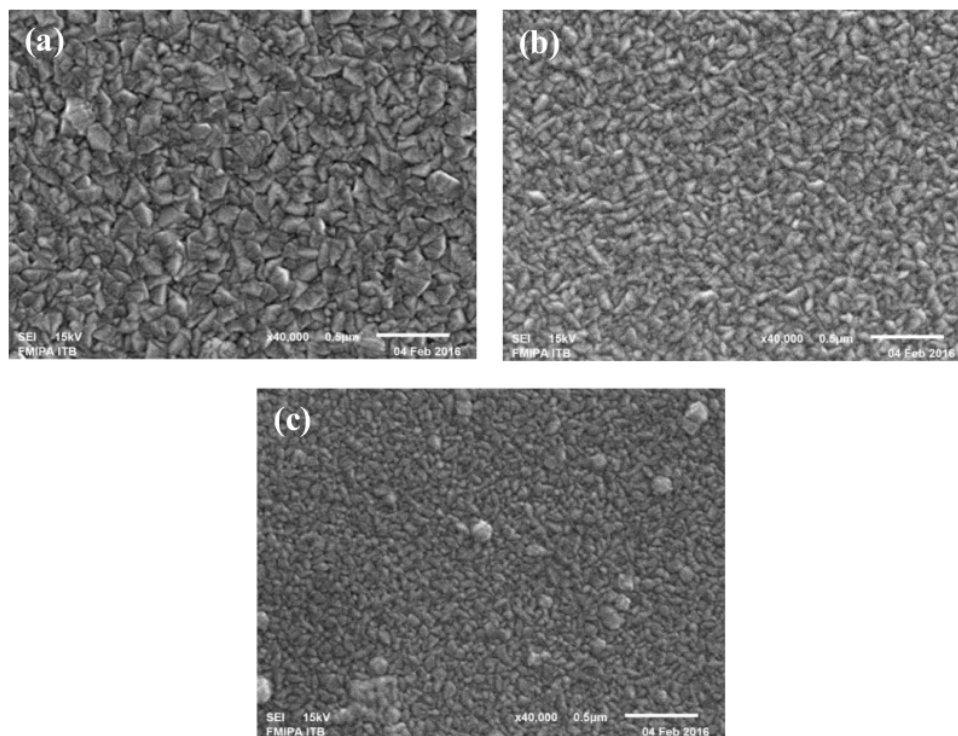

8  
**Figure 1.** SEM images of ZnO:Ga thin films with different annealing temperatures: (a) 300 °C, (b) 350 °C, and (c) 400 °C.

It is clearly shown that the annealing temperature has a great influence on ZnO:Ga film surface structures, which surface roughness decreased when the annealing temperature was increased. The surface morphology of the ZnO:Ga film is denser when the annealing temperature is increased from 300 °C to 400 °C. It can be seen that, by increasing the annealing temperatures, the roughness of the films is reduced. Decreasing the surface roughness of ZnO:Ga thin films due to annealing treatment was probably caused by the relaxation of defects [3]. It is possible that some oxygen atoms from ZnO:Ga are released when the annealing temperature is enhanced so that the grain size of the films decreases.

XRD pattern of ZnO:Ga thin films deposited on Corning glass substrate with different annealing temperature is shown in figure 2. All the films exhibit a strong (002) peak, and a weak (101) peaks as previously reported [6]. The ZnO:Ga films are polycrystalline with peak oriented along the (002) plane. The same diffraction peak (002) shows that the films mostly grow along the *c* axis [12]. It indicated that the grains of the films were strongly oriented along the *c*-axis of the wurtzite structure [13]. The diffraction patterns show that increasing of annealing temperature influence the diffraction intensity. When the temperature annealing increased from 300 °C to 350 °C, the intensity of the (002) peak is increased, but the (001) peak intensity is decreased. The decrease of (002) peak intensity at 400 °C annealing temperature indicated the occurring structural degradation of the ZnO thin films. This is showed that over annealing temperature leads to the decreasing of crystallinity.

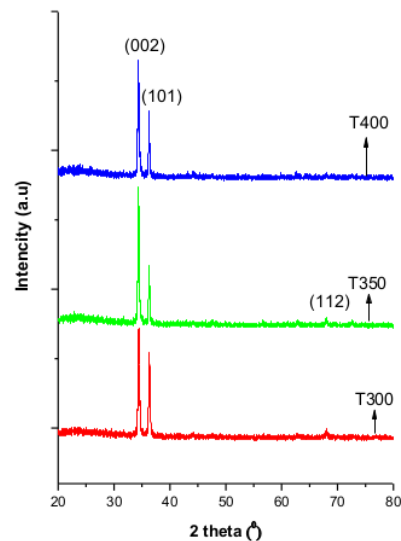

**Figure 2.** XRD pattern of ZnO:Ga thin films with different annealing temperatures.

Table 1 shows the structural parameters of ZnO:Ga thin films. The crystallite size of ZnO:Ga films have been determined from the Full Width at Half Maximum (FWHM) of diffraction peak using the Scherrer formula. It can be showed that the annealing temperature has a significant contribution to the change of the crystal size of the deposited films. The crystal size increases from 59.40 nm up to 66.56 nm, while the annealing temperature increase from 300°C to 350°C. However, the crystal size decreases from 66.56 nm to 57.38 nm, while the annealing temperature increased from 350°C to

400°C. The lowest FWHM is obtained at 350°C annealing temperature. This shows that this condition is the optimum annealing temperature.

**Table 1.** Structure parameters of ZnO:Ga thin films with different annealing temperature

| Annealing temperature (°C) | 2θ (°) | FWHM (°) | d spacing (Å) | c lattice (Å) | crystal size (nm) | a lattice (Å) |
|----------------------------|--------|----------|---------------|---------------|-------------------|---------------|
| 300                        | 34.44  | 0.28     | 2.600         | 5.200         | 59.40             | 7.654         |
| 350                        | 34.40  | 0.25     | 2.601         | 5.202         | 66.56             | 7.663         |
| 400                        | 34.41  | 0.29     | 2.604         | 5.208         | 57.38             | 7.661         |

#### 4. Conclusion

The influence of annealing temperature on the morphology and crystalline structure of ZnO:Ga thin films deposited by handmade dc-sputtering method were analyzed using SEM micrograph and XRD diffractometer. The annealing temperature has a great influence on ZnO:Ga film surface morphology. The observations with SEM show that the film morphology is denser and the grain size is smaller when the annealing temperature is increased. The crystallinity of the film increases as the annealing temperature is enhanced from 300 °C to 350 °C. However, the crystallinity of the ZnO:Ga thin films decreased when the annealing temperature at 400 °C.

#### Acknowledgment

The author is grateful to all parties who have helped conduct of the research (Material Research Group, Physics Department, Universitas Negeri Semarang).

#### References

- [1] Horng R-H, Ou Si-L, Huang C-Y and Wu C-I, 2016 *Thin Solid Films* **605** 30
- [2] Sim K U, Shin S W, Moholkar A V, Yun J H, Moon J H and Kim J H 2010 *Curr Appl Phys* **10** S463
- [3] Shin H H, Joung Y H and Kang S J 2009 *J Mater Sci: Mater Electron* **20** 704
- [4] Sali S, Boumaour M and Ighil R T 2008 *Revue des Energies Renouvelables CICME Sousse* **8** 20
- [5] Ying L, Huang Q and Xiaofang B 2013 *J Mater Sci* **24** 79
- [6] Marwoto P, Wibowo E, Suprayogi D, Sulhadi, Aryanto D and Sugianto 2016 *Am J Appl Sci* **13** 1394
- [7] Mahdi H, Ayadi Z B, Alaya S, Gauffier J L and Djesas K 2014 *Superlattices Microstruct* **72** 60
- [8] An H-R Ahn H-J and Park J-W 2015 *Ceram Int* **41** 2253
- [9] Kim J-H and Yer I-H 2016 *Ceram Int* **42** 3304
- [10] Hjiri M, Dahri R, Mir I E, Bonavita A, Donato N, Leonardi S G and Neri G 2015 *J Alloys Compd* **634** 187
- [11] Aryanto D, Maulana R M, Sudiro T, Masturi, Wismogroho A S, Sebayang P, Ginting M and Marwoto P 2018 *AIP Conf Proc* **1862** 030045
- [12] Gong L, Liu Y, Jiang L and Liu F 2017 *Mater Sci Semicond Process* **66** 105
- [13] Lee Y-S, Peng Y-C, Lu J-H, Zhu Y-R and Wu H-C 2013 *Thin Solid Films* **570** (B) 464



# Influence Of Annealing Temperature On The Morphology And Crystal Structure Of Ga-Doped Zno Thin Films

## ORIGINALITY REPORT

12%

SIMILARITY INDEX

5%

INTERNET SOURCES

10%

PUBLICATIONS

2%

STUDENT PAPERS

## PRIMARY SOURCES

- 1 Xiang Yang Kong, Zhong Lin Wang. "Spontaneous Polarization-Induced Nanohelices, Nanosprings, and Nanorings of Piezoelectric Nanobelts", Nano Letters, 2003  
Publication 1%
- 2 Submitted to Higher Education Commission Pakistan  
Student Paper 1%
- 3 R X Wang, C Y Wu, Q Peng, X T Ge, J Q Ning, S J Xu, Q Sun, R Huang, Z L Huang, W Q Zhu, H Yang. "Characteristics of Ga-doped ZnO thin-film ultraviolet photodetectors fabricated on patterned Si substrate", Semiconductor Science and Technology, 2020  
Publication 1%
- 4 Submitted to Institut Pertanian Bogor  
Student Paper 1%
- 5 J.L. Gonzalez-Vidal. "Gas microsensors based on semiconductor thin films of ZnO:Ga", (ICEEE). 1st International Conference on 1%

# Electrical and Electronics Engineering, 2004., 2004

Publication

---

|    |   |     |
|----|---|-----|
| 6  | <a href="http://article.sapub.org">article.sapub.org</a><br>Internet Source   | 1 % |
| 7  | I. Novotny, V. Tvarozek, P. Sutta, M. Netrvalova, J. Novak, I. Vavra, P. Elias.<br>"Preparation of shell nanocrystalline Ga-doped ZnO ultra-thin films by sputtering",<br>2012 28th International Conference on Microelectronics Proceedings, 2012<br>Publication | 1 % |
| 8  | <a href="http://doaj.org">doaj.org</a><br>Internet Source   | 1 % |
| 9  | G.A. Hirata, J. McKittrick, T. Cheeks, J.M. Siqueiros, J.A. Diaz, O. Contreras, O.A. Lopez.<br>"Synthesis and optoelectronic characterization of gallium doped zinc oxide transparent electrodes", Thin Solid Films, 1996<br>Publication                          | 1 % |
| 10 | <a href="http://www.naun.org">www.naun.org</a><br>Internet Source   | 1 % |
| 11 | <a href="http://zenodo.org">zenodo.org</a><br>Internet Source   | 1 % |
| 12 | <a href="http://journals.matheo.si">journals.matheo.si</a><br>Internet Source   | 1 % |

---



- 13 snf2021.snf-unj.ac.id 1 %  
Internet Source
- 
- 14 F. Lu. "Deposition of  $\text{Gd}_2\text{O}_3$  Buffer Layers on Ni-Based Substrates by Aerosol Spray Pyrolysis", IEEE Transactions on Applied Superconductivity, 6/2005 <1 %  
Publication
- 
- 15 Toshihiro Moriga, Akihiko Fukushima, Yozo Tomonari, Shoji Hosokawa, Ichiro Nakabayashi, Kikuo Tominaga. "Crystallization process of transparent conductive oxides Zn In O ", Journal of Synchrotron Radiation, 2001 <1 %  
Publication
- 
- 16 Gavrilenko, Alexander V., Krishnaveni Dondapati, Vladimir I. Gavrilenko, Jongbum Kim, Gururaj V. Naik, Alexandra Boltasseva, Nader Engheta, Mikhail A. Noginov, and Nikolay I. Zheludev. "Optical functions of nanocrystalline ZnO containing voids and doped with Ga", Metamaterials Fundamentals and Applications V, 2012. <1 %  
Publication
- 
- 17 Kausar Harun, Muhamad Kamil Yaakob, Mohamad Fariz Mohamad Taib, Bouchta Sahraoui, Zainal Arifin Ahmad, Ahmad Azmin Mohamad. "Efficient diagnostics of the

# electronic and optical properties of defective ZnO nanoparticles synthesized using the sol-gel method: experimental and theoretical studies", Materials Research Express, 2017

Publication

---

---

Exclude quotes  On

Exclude matches  < 5 words

Exclude bibliography  On

# Influence Of Annealing Temperature On The Morphology And Crystal Structure Of Ga-Doped Zno Thin Films

---

GRADEMARK REPORT

---

FINAL GRADE

**/0**

GENERAL COMMENTS

**Instructor**

---

PAGE 1

---

PAGE 2

---

PAGE 3

---

PAGE 4

---

PAGE 5

---