

HASIL UJI KEMIRIPAN TURNITIN

No. : 675/CTN/VI/2024

UPT Perpustakaan Unnes menerangkan bahwa artikel yang berjudul
The Effects of Alternative Fuel Mixture of HDPE Plastic and Gasoline on Four-Stroke
Engine Exhaust Gas Emissions

Nama Penulis : Dr. Eng. Rizqi Fitri Naryanto, S.T., M.Eng

Email : rizqi_fitri@mail.unnes.ac.id

NIM/NIP/NIK/NIDN : 198008302014041001

Nomor HP : 081210223375

Skor Hasil Kemiripan : 19%

Asal Fakultas/Unit : FT

Asal Universitas/Instansi : Universitas Negeri Semarang

Surat ini dikeluarkan untuk digunakan dengan sebaik-baiknya.

Semarang, 5 Juni 2024
Kepala UPT Perpustakaan



Dr. Sungkowo Edy Mulyono, S.Pd., M.Si.
NIP. 196807042005011001

*hasil turnitin dapat diunduh melalui akun turnitin masing-masing

The Effects of Alternative Fuel Mixture of HDPE Plastic and Gasoline on Four-Stroke Engine Exhaust Gas Emissions

by Rizqi Fitri

Submission date: 05-Jun-2024 03:47PM (UTC+0700)

Submission ID: 2396034226

File name: of_Alternative_Fuel_Mixture_of_HDPE_Plastic_an_-_Rizqi_Fitri.pdf (389.64K)


Word count: 3563

Character count: 18493



Journal of Advanced Research in Fluid Mechanics and Thermal Sciences

Journal homepage:
https://semarakilmu.com.my/journals/index.php/fluid_mechanics_thermal_sciences/index
ISSN: 2289-7879



14 The Effects of Alternative Fuel Mixture of HDPE Plastic and Gasoline on Four-Stroke Engine Exhaust Gas Emissions

Rizqi Fitri Naryanto^{1,*}, Kriswanto¹, Fahmy Zuhda Bahtiar², Mera Kartika Delimayanti³, Andri Setiawan¹

- 13
¹ Department of Mechanical Engineering, Universitas Negeri Semarang, Gd E9 Kampus Sekaran Gunungpati, 50229 Semarang, Indonesia
² Automotive Technology Vocational Education, Universitas Ivet, Bendan Duwur- Gajahmungkur, Semarang, Indonesia
³ Department of Computer and Informatics Engineering, Politeknik Negeri Jakarta, 16425, Depok, Indonesia

8 ARTICLE INFO

ABSTRACT

Article history:

Received 27 October 2022

Received in revised form 7 February 2023

Accepted 14 February 2023

Available online 27 February 2023

Keywords:

Alternative fuels; pyrolysis; HDPE; engine speed; exhaust gas emissions

Alternative fuels, like a mix of pyrolyzed plastic waste and gasoline, have made us less dependent on nonrenewable petroleum. Since HDPE has a low density, it is perfect for producing more oil at temperatures as low as 400°Celsius. It has a density of around 0.94 g/cm³, whereas gasoline is between 0.60 g/cm³ and 0.78 g/cm³. This study compared a blend of C10 and C20 gasoline at engine speeds of 1500, 2000, and 2500 rpm to C0 gasoline. Results indicated that as speed increased, exhaust gas emissions such as HC and CO levels in pure gasoline (C0) dropped, whereas levels in the combination increased. This demonstrates that a mixture of gasoline and HDPE damages the environment.

1. Introduction

Alternative fuels refer to a mixture of pure fuel and other substances in certain ratios. They are used to reduce overreliance on regular fuel. Plastic is an example of a fuel mixer with many advantages compared to other materials. Since plastic wastes are not biodegradable, they cause environmental problems, especially in major cities. Environmental experts and scientists from various disciplines have conducted studies and taken various actions to curb this problem.

Most plastic wastes exist in different classes of polymers, including high-density polyethylene (HDPE), low-density polyethylene (LDPE), polyvinyl chloride (PVC), polypropylene (PP), polystyrene (PS) and polyethylene terephthalate (PET) [1]. These are high molecular weight organic polymers containing other substances. They are synthetic and commonly derived from petrochemicals [2].

Plastic waste can be used as an alternative fuel mixture. However, this involves several processes, including treating the waste with biodegradable plastic, burning waste, and pyrolysis. These processes break down of material at high temperatures with limited air to create a product in the

* Corresponding author.

E-mail address: rizqi_fitri@mail.unnes.ac.id

<https://doi.org/10.37934/arfmts.103.2.197204>

form of gas and liquid and a heating pad as solids that remain in the reactor. The product is plastic waste oil as an alternative fuel, and biomass energy [3,4].

Chemically, HDPE (High-Density Polyethylene) plastic has a low density, and producing it yields more oil at a low temperature of 400°C. Furthermore, it has a high density of approximately $> 0.94 \text{ g/cm}^3$, equivalent to a gasoline density of $0.60\text{-}0.78 \text{ g/cm}^3$. Since the HDPE plastic and gasoline have almost the same characteristics, pyrolysis from HDPE plastic waste can be mixed [5,6].

The use of plastic waste oil needs knowledge in the type of emission produced to ensure that it does not negatively influence human survival. Emission values exceeding the permissible threshold are very harmful to the environment. Hazardous gas emissions from the combustion process are hydrocarbon (HC) and carbon monoxide (CO) gas [7,8]. A part from harming human health, increased vehicle volume, and air pollution influence natural conditions or global warming. Research on emission levels from plastic waste oil has not been widely conducted. This determines HDPE's effect as a mixture with gasoline fuel on the level of exhaust gas emissions. Experiments were performed under conditions C0 (100% pure premium), C10 (a mixture of 90% gasoline and 10% plastic oil), and C20 (a mixture of 80% gasoline and 20% plastic oil) with engine speeds of 1500, 2000 and 2500 rpm, by measuring carbon monoxide (CO) and hydro carbon (HC). Plastic waste was processed by pyrolysis to produce HDPE oil mixed with the gasoline to be used as fuel in research [9,10].

2. Materials and Method

In this research, we had already conducted some steps using the materials on the methods. Plastics were used for executing the process mixed with the gasoline. Most plastic wastes exist in different classes of polymers, including high-density polyethylene (HDPE), low-density polyethylene (LDPE), polyvinyl chloride (PVC), polypropylene (PP), polystyrene (PS), and polyethylene terephthalate (PET).

2.1 Plastic Technology

Industrial plastics are more homogeneous and environmentally friendly, making them useful for down-cycling into lower-grade plastic products. Municipal plastics are more heterogeneous, containing foreign substances. Approximately 10.675.1 wt% of Municipal waste contains plastics [11,12]. Its waste mainly includes low-density polyethylene (LDPE), high-density polyethylene (HDPE), polyethylene terephthalate (PET), polypropylene (PP), polystyrene (PS), and poly (vinyl chloride) (PVC). About 50-70% of the total plastic waste is packaging materials from polyethylene, polypropylene, polystyrene, and polyvinyl chloride [9]. Averagely, polyethylene makes up the greatest fraction of all plastic wastes (69%), and it comprises 63% of the total packaging waste [9,11].

Polyethylene (PE, low and high density) and polypropylene (PP) are the most widely used plastics [13]. HDPE is recyclable and can be discovered in plastic bottle, storage boxes, pipes and cable insulations, and many other applications. LDPE can manufacture computer parts, toys, soft bottles, wrappers, back sheets for diapers, and several additional applications. In the packaging industry, all three polymers, PP, PS, and PE, are widely use [5,6]. A copolymer of ethylene and propylene is frequently utilized as a rubber and in computer [5]. Poly (vinyl chloride) (PVC) is another popular plastic suitable in many applications, such as plumbing pipes, electrical cable insulation, tubing, automobile seat covers, and rubber replacement. Poly (ethylene terephthalate) (PET) is a common polymer with many applications, including films, fibers, food containers, and beverage bottles [14].

2.2 Pyrolysis

This is the degradation of a material at high temperatures without oxygen by the thermochemical process. In plastic material, temperature between 300-500°C is required to form a gas condensed and distilled, producing oil and pulp in the form of char [15].

Studies related to fuel production from plastic HDPE and LDPE have been widely conducted. Plastic pyrolysis oil increases the efficiency of 100 cc motors by 15-20% compared to gasoline. The HDPE and LDPE oils have the same densities as gasoline and fuel, respectively. The pyrolysis process at low temperatures requires a catalyst for efficient combustion [16]. The pyrolysis process had been conducted, as illustrated in Figure 1.

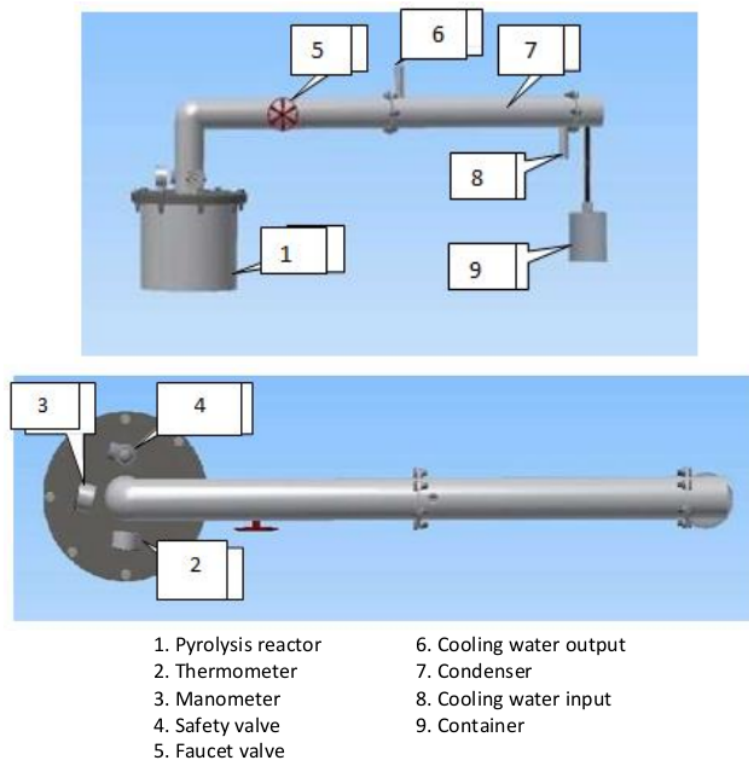


Fig. 1. Pyrolysis apparatus of plastic HDPE

2.3 Gasoline Fuels

This is a clear, yellowish distilled fuel oil. The yellow color is due to the presence of additional dye. This fuel is widely used in internal combustion engines (ICE), especially for spark engines. The fuel quality has many effects on the combustion process. Therefore, the power generated is at maximum. A good fuel reduces knocking due to high pressure and temperature in the combustion chamber. These characteristics are called octane numbers in fuel.

The research was conducted using a mixture of plastic waste oil with fuels C0 (100% pure premium), C10 (a mixture of 90% gasoline and 10% plastic oil), and C20 (a mixture of 80% gasoline

and 20% plastic oil). It was performed on 125 cc motorcycle vehicles based on the specifications in Table 1, with engine speed variations of 1500, 2000 and 2500 rpm.

Table 1

Engine specification

| Variables | Dimension |
|----------------------------|------------------------|
| Engine type | 4 stroke SOHC |
| Diameter x stroke | 52.4 mm x 57.9 mm |
| Cylinder volume | 125 cc |
| Maximum Power | 9.3 PS/7500 rpm |
| Maximum Torque | 1.03 kgf.m/400 rpm |
| Compression comparison | 9.0 : 1 |
| Clutch type | Automatic, centrifugal |
| Lubrication System | Wet |
| Cooling System | Air Cooling System |
| Fuel system | Carburetor |
| Transmission Type | Rotary, 4 speed |
| Ignition system | DC - CDI |
| Working Engine temperature | 70°C – 80°C. |
| Engine type | 4 stroke SOHC |

3. Result and Discussion

This research uses High-Density PolyEthylene (HDPE) plastic oil processed by pyrolysis as a gasoline fuel mixture. This was meant to produce HDPE oil that is mixed with gasoline fuel [17]. The plastic waste oil from the process is tested in a laboratory with the results shown in Table 2.

Table 2

Laboratory test results of HDPE plastic oil

| No | Test Type | Unit | Test Result |
|----|------------------------------|------|-------------|
| 1 | Research Octane Number (RON) | | 72.1 |
| 2 | Motor Octane Number (MON) | | 55.4 |
| 3 | (RON+MON)/2 | | 63.8 |
| 4 | Flashpoint | (°C) | 36 |

Based on laboratory test data, HDPE plastic oil has an octane number of 63.8, while gasoline fuel oil has an 88. The plastic oil has a heat value of 45,594 J/g, and a flashpoint of 36°C, while gasoline has a -43°C. The mixing of HDPE and gasoline petrol fuel is performed with the following composition as shown in Figure 2.



Fig. 2. Pure HDPE plastic oil, Pure Premium gasoline, C10 Mixture, C20 Mixture

3.1 C10 Mixture (90% Gasoline and 10% HDPE Plastic Oil)

The mixture of gasoline fuel and HDPE plastic oil is 90% and 10% with a volume of 450 ml gasoline and 50 ml plastic oil, respectively. The laboratory results are shown in Table 3. In the C10 mixture variation, the octane value increased by 85.4 from the HDPE plastic waste oil mixture of 63.8. Flashpoint on this variation is 34°C decreased from the mixture of HDPE plastic waste oil and 36°C gasoline.

Table 3
 Laboratory test results of C10 fuel (90% gasoline and 10% plastic waste oil)

| No | Test Type | Unit | Test Result |
|----|------------------------------|------|-------------|
| 1 | Research Octane Number (RON) | | 89.1 |
| 2 | Motor Octane Number (MON) | | 81.7 |
| 3 | (RON+MON)/2 | | 85.4 |
| 4 | Flashpoint | (°C) | 34 |

3.2 C20 Mixture (80% Gasoline and 20% HDPE Plastic Oil)

A mixture of gasoline fuel and HDPE plastic oil is a percentage of 80% and 20%, respectively, with a volume of 400 ml gasoline and 100 ml plastic oil. The laboratory results are shown in Table 4.

Table 4
 Laboratory test results of C20 fuel (80% gasoline and 20% HDPE plastic oil)

| No | Test Type | Unit | Test Result |
|----|------------------------------|------|-------------|
| 1 | Research Octane Number (RON) | | 83.5 |
| 2 | Motor Octane Number (MON) | | 89.5 |
| 3 | (RON+MON)/2 | | 86.5 |
| 4 | Flashpoint | (°C) | 35.5 |

According to Figure 3 and Table 5, in pure gasoline premium type (C0), the exhaust gas emission level decreases according to the engine speed. However, it is different from the fuel mixtures (C10, C20), which undergo an increase in CO levels at an engine speed of 1500-2500 rpm.

More details can be seen in the graph below.

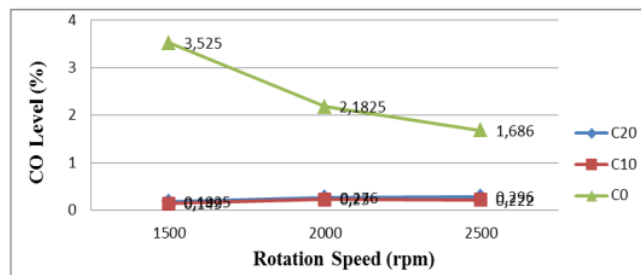


Fig. 3. A graph illustrating the CO gas emission levels on the variations in C0, C10, C20 fuel mixtures

Table 5
 CO Exhaust Gas Emissions from C0, C10, C20 fuel mixtures

| Speed (Rpm) | Trial | CO levels (%) | | |
|-------------|---------|-------------------------|--------------------------------------|--------|
| | | Pure Gasoline (Premium) | A Mixture of Pure Gasoline (Premium) | |
| | | C0 | C10 | C20 |
| 1500 | 1 | 3.914 | 0.175 | 0.193 |
| | 2 | 3.136 | 0.123 | 0.192 |
| | Average | 3.525 | 0.149 | 0.1925 |
| 2000 | 1 | 2.162 | 0.277 | 0.286 |
| | 2 | 2.203 | 0.183 | 0.266 |
| | Average | 2.1825 | 0.23 | 0.276 |
| 2500 | 1 | 1.699 | 0.232 | 0.273 |
| | 2 | 1.673 | 0.212 | 0.319 |
| | Average | 1.686 | 0.222 | 0.296 |

Figure 4 and Table 6 shown that in all variations of the fuel mixture (C0, C10, C20), the level of HC exhaust gas emissions decreases based on the engine speed. An increase in engine speed reduces the level of HC gas emissions at a stationary rotation [18,19]. In this case, the engine rotation speed is 1500-2500 rpm. More details can be seen in the graph below.

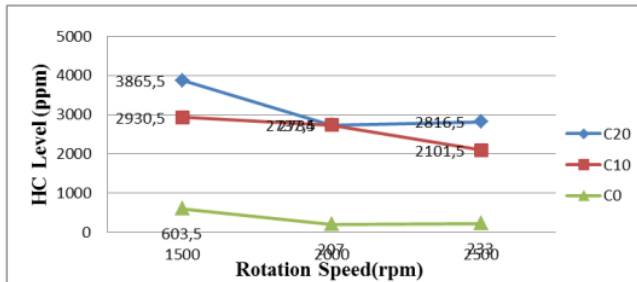


Fig. 4. A graph illustrating the HC gas emission levels on the variations in C₀, C₁₀, C₂₀ fuel mixtures

Table 6
 The results of HC exhaust gas emissions from C0, C10, C20 fuel mixtures

| Speed (Rpm) | Trial | HC levels (ppm) | | |
|-------------|---------|-------------------------|---|--------|
| | | Pure Gasoline (Premium) | A mixture of gasoline and HDPE plastic oils | |
| | | C0 | C10 | C20 |
| 1500 | 1 | 700 | 2864 | 3766 |
| | 2 | 507 | 2997 | 3965 |
| | Average | 603.5 | 2930.5 | 3865.5 |
| 2000 | 1 | 171 | 2558 | 3244 |
| | 2 | 243 | 2910 | 2231 |
| | Average | 207 | 2734 | 2737.5 |
| 2500 | 1 | 259 | 2239 | 3569 |
| | 2 | 207 | 1964 | 2064 |
| | Average | 233 | 2101.5 | 2816.5 |

According to Table 7, there are differences in the octane numbers in HDPE plastic oils and mixtures C10 and C20. The higher the percentage of used plastic oil, the lower of the octane number. The low octane value has an impact on knocking. A collision between an explosion of fuel mixture

(before a flame) and the fuel ignited by the spark plug, causing a sound, is known as knocking. Furthermore, there is a flashpoint variable. This is the lowest temperature at which the oil vapor or fuel in the mixture with the air ignites when subjected to a flame test (ignition) under certain conditions. The high flashpoint on fuel affects the resistance to ignition. The higher of the proportion from used plastic oil, the higher of the flashpoint.

Table 7
 Analysis of plastic waste oil characteristics and mixture variations

| No | Variations | Octane Number (RON) | Flashpoint (°C) |
|----|------------------------|---------------------|-----------------|
| 1 | HDPE Plastic Waste Oil | 72.1 | 36 |
| 2 | C ₁₀ | 89.1 | 34 |
| 3 | C ₂₀ | 83.5 | 35.5 |

Based on the results of exhaust gas emissions in Table 8, the highest levels of exhaust emissions in a row are in the specimen with a mixture of 20% plastic waste oil compared to a mixture of other percentages. For 20% fuel, exhaust gas emissions are lowest compared to 10% pure or unmixed fuel. This is due to detonation where the fuel burns without any ignition. It is caused by high temperature in the space, exceeding the flashpoint and the fuel crust sticking to the cylinder wall. The attached crusts burn during the work cycle of the vehicle, causing the knocking.

Table 8
 Analysis of HC and CO exhaust emission levels

| No | Variations | 1500 rpm | | 2000 rpm | | 2500 rpm | |
|----|------------|----------|--------|----------|--------|----------|--------|
| | | HC (ppm) | CO (%) | HC (ppm) | CO (%) | HC (ppm) | CO (%) |
| 1 | C0 | 603.5 | 3.525 | 207 | 2.1825 | 233 | 1.686 |
| 2 | C10 | 2930.5 | 0.149 | 2734 | 0.23 | 2101.5 | 0.222 |
| 3 | C20 | 3865.5 | 0.1925 | 2737.5 | 0.276 | 2816.5 | 0.296 |

The high heat generated in the fuel after combustion increases the combustion chamber temperature. Furthermore, this affects the temperature of the air entering the cylinder. The higher of the air temperature, the denser of the molecules. The air molecules density increases the amount of air drawn by the piston into the combustion chamber, making the mixture to become lean condition. This reduces HC gas emission levels. A lean condition causes the length of fire to burn the fuel mixture with air, increasing the combustion rate than the piston speed. However, it does not apply to CO in fuel mixture with plastic oil.

At an engine speed of 1500 rpm, the HC gas emission in each research has the highest level than 2000 and 2500 rpm. This is because the throttle valve is fully closed, and therefore the air entering the combustion chamber due to piston suction is less than the fuel.

4. Conclusions

This research involved producing gasoline of C0, C10, and C20 fuel mixes with engine speed variations of 1500, 2000, and 2500 rpm. The results show a decrease in the HC and CO exhaust gas emission levels at pure gasoline (C0), with an increase in the engine speed. Also, the HDPE mixture (C10, C20) experienced a decrease in HC levels and an increase in CO in the engine speed. This shows that HDPE mixed fuel is environmentally less friendly compared to pure premium.

References

- [1] Panda, Achyut K., Raghubansh K. Singh, and D. K. Mishra. "Thermolysis of waste plastics to liquid fuel: A suitable method for plastic waste management and manufacture of value added products-A world prospective." *Renewable and Sustainable Energy Reviews* 14, no. 1 (2010): 233-248. <https://doi.org/10.1016/j.rser.2009.07.005>
- [2] Rajamani, D., and E. Balasubramanian. "Effects of heat energy on morphology and properties of selective inhibition sintered high density polyethylene." *Journal of Mechanical Engineering and Sciences* 13, no. 1 (2019): 4403-4414. <https://doi.org/10.15282/jmes.13.1.2019.05.0375>
- [3] Naryanto, Rizqi Fitri, Hiroshi Enomoto, Noburu Hieda, Yoshikazu Teraoka, Chuntima Chunti, and Reiji Noda. "The influence of wood pellet feedstock water content on tar component in biomass system using downdraft gasifier." *Journal of the Japan Institute of Energy* 98, no. 5 (2019): 115-118. <https://doi.org/10.3775/jie.98.115>
- [4] Naryanto, Rizqi Fitri, Hiroshi Enomoto, Anh Vo Cong, Kazuki Fukadu, Zheng Zong, Mera Kartika Delimayanti, Chuntima Chunti, and Reiji Noda. "The effect of moisture content on the tar characteristic of wood pellet feedstock in a downdraft gasifier." *Applied Sciences* 10, no. 8 (2020): 2760. <https://doi.org/10.3390/app10082760>
- [5] Miskolczi, Norbert, Laszlo Bartha, Gy Deak, and Bela Jover. "Thermal degradation of municipal plastic waste for production of fuel-like hydrocarbons." *Polymer Degradation and Stability* 86, no. 2 (2004): 357-366. <https://doi.org/10.1016/j.polydegradstab.2004.04.025>
- [6] Miskolczi, N., L. Bartha, and Gy Deák. "Thermal degradation of polyethylene and polystyrene from the packaging industry over different catalysts into fuel-like feed stocks." *Polymer Degradation and Stability* 91, no. 3 (2006): 517-526. <https://doi.org/10.1016/j.polydegradstab.2005.01.056>
- [7] Naryanto, R. F., H. Enomoto, V. C. Anh, K. Fukadu, S. Iwai, and R. Noda. "Investigation of producer gas biomass gasification on reciprocated internal combustion engine." In *IOP Conference Series: Earth and Environmental Science*, vol. 460, no. 1, p. 012016. IOP Publishing, 2020. <https://doi.org/10.1088/1755-1315/460/1/012016>
- [8] Damayanti, A., R. Musfiroh, and N. Andayani. "The Effect of Tapioca Flour Adhesives to the Biopellet Characteristics of Rice Husk Waste as Renewable Energy." In *IOP Conference Series: Earth and Environmental Science*, vol. 700, no. 1, p. 012028. IOP Publishing, 2021. <https://doi.org/10.1088/1755-1315/700/1/012028>
- [9] Scott, D. S., S. R. Czernik, J. Piskorz, and D. St AG Radlein. "Fast pyrolysis of plastic wastes." *Energy & Fuels* 4, no. 4 (1990): 407-411. <https://doi.org/10.1021/ef00022a013>
- [10] Lubis, Hamzah. "Renewable energy of rice husk for reducing fossil energy in Indonesia." *Journal of Advanced Research in Applied Sciences and Engineering Technology* 11, no. 1 (2018): 17-22.
- [11] Zhou, Chuanbin, Wenjun Fang, Wanying Xu, Aixin Cao, and Rusong Wang. "Characteristics and the recovery potential of plastic wastes obtained from landfill mining." *Journal of Cleaner Production* 80 (2014): 80-86. <https://doi.org/10.1016/j.jclepro.2014.05.083>
- [12] Buekens, A. G., and H. Huang. "Catalytic plastics cracking for recovery of gasoline-range hydrocarbons from municipal plastic wastes." *Resources, Conservation and Recycling* 23, no. 3 (1998): 163-181. [https://doi.org/10.1016/S0921-3449\(98\)00025-1](https://doi.org/10.1016/S0921-3449(98)00025-1)
- [13] Harding, K. G., J. S. Dennis, Harro Von Blottnitz, and S. T. L. Harrison. "Environmental analysis of plastic production processes: Comparing petroleum-based polypropylene and polyethylene with biologically-based poly-β-hydroxybutyric acid using life cycle analysis." *Journal of Biotechnology* 130, no. 1 (2007): 57-66. <https://doi.org/10.1016/j.jbiotec.2007.02.012>
- [14] Begley, Timothy H., and Henry C. Hollifield. "High-performance liquid chromatographic determination of migrating poly (ethylene terephthalate) oligomers in corn oil." *Journal of Agricultural and Food Chemistry* 38, no. 1 (1990): 145-148. <https://doi.org/10.1021/jf00091a031>
- [15] Patni, Neha, Pallav Shah, Shruti Agarwal, and Piyush Singhal. "Alternate Strategies for Conversion of Waste Plastic to Fuels." *ISRN Renewable Energy* (2013). <https://doi.org/10.1155/2013/902053>
- [16] Yadav, Raj Kumar, and Yogesh Kumar Tembhurne. "Waste plastic fuel used in petrol engine." *Technology* 7, no. 1 (2016): 01-04.
- [17] Srinivasan, Naresh, Mohanraj Rajamanickam, Mythili Gnanamangai Balasubramaniyan, and Philip Robinson Jayachandran. "Conversion of plastic wastes to alternative fuel using G2F system." *International Research Journal of Multidisciplinary Technovation* 1, no. 6 (2019): 692-700. <https://doi.org/10.34256/irjmtcon98>
- [18] Yong, Jiunn Boon, Lian See Tan, and Jully Tan. "Comparative life cycle assessment of biomass-based and coal-based activated carbon production." *Progress in Energy and Environment* 20 (2022): 1-15. <https://doi.org/10.37934/progee.20.1.115>
- [19] Veza, Ibbam, Mohd Farid Muhamad Said, Djati Wibowo Djamari, Mohd Azman Abas, Zulkarnain Abdul Latiff, and Mohd Rozi Mohd Perang. "Future Direction of Microalgae Biodiesel in Indonesia." *Journal of Advanced Research in Applied Sciences and Engineering Technology* 25, no. 1 (2021): 1-6. <https://doi.org/10.37934/araset.25.1.16>

The Effects of Alternative Fuel Mixture of HDPE Plastic and Gasoline on Four-Stroke Engine Exhaust Gas Emissions

ORIGINALITY REPORT

19%

SIMILARITY INDEX

15%

INTERNET SOURCES

14%

PUBLICATIONS

11%

STUDENT PAPERS

PRIMARY SOURCES

- 1** Bidhya Kunwar, H.N. Cheng, Sriram R Chandrashekar, Brajendra K Sharma. "Plastics to fuel: a review", Renewable and Sustainable Energy Reviews, 2016
Publication 6%
- 2** Submitted to Politeknik Negeri Bandung
Student Paper 3%
- 3** repository.lppm.unila.ac.id
Internet Source 1%
- 4** Enggar Hero Istoto, Widayat, Singgih Saptadi. "Production of Fuels From HDPE and LDPE Plastic Waste via Pyrolysis Methods", E3S Web of Conferences, 2019
Publication 1%
- 5** media.suub.uni-bremen.de
Internet Source 1%
- 6** coek.info
Internet Source 1%
- 7** t2r2.star.titech.ac.jp

Internet Source

1 %

8

research.vu.nl

Internet Source

1 %

9

www.besjournal.com

Internet Source

1 %

10

R Irmawaty, H Parung, R Djamaluddin, A A Amiruddin, M P Faturrahman. "Mechanical Properties of Concrete Using Plastic Waste", IOP Conference Series: Materials Science and Engineering, 2020

Publication

1 %

11

www.ijres.org

Internet Source

1 %

12

Hendry Sakke Tira, Yesung Allo Padang, Syahrul, Dimas Restu Arindra Putra, Arif Mulyanto, Salman. "Combination of Biogas-dual Fuel Engine Method and Activated Charcoal Adsorbent to Minimize Emissions from Two-wheeler", E3S Web of Conferences, 2023

Publication

1 %

13

W Sumbodo, Kriswanto, J Jamari. "Simulation and Optimization of Machining Time During Milling AISI P20 Steel", IOP Conference Series: Earth and Environmental Science, 2021

Publication

1 %

Exclude quotes On

Exclude matches < 15 words

Exclude bibliography On