

**BUKTI KORESPONDENSI**  
**ARTIKEL JURNAL INTERNASIONAL BEREPUTASI**

Korespondensi Journal of Advanced Research in Fluid Mechanics and Thermal Sciences

Index Jurnal : Terindex Scopus Q3

SJR : 0.281

Publisher : SEMARAK ILMU Publishing Malaysia

Judul Artikel : **The Effects of Alternative Fuel Mixture of HDPE Plastic and Gasoline on Four-Stroke Engine Exhaust Gas Emissions**


Jurnal : **Journal of Advanced Research in Fluid Mechanics and Thermal Sciences 103, Issue 2 (2023) 197-204**

Penulis : **Rizqi Fitri Naryanto**<sup>1\*</sup>, Kriswanto<sup>1</sup>, Fahmy Zuhda Bahtiar<sup>2</sup>, Mera Kartika Delimayanti<sup>3</sup>, Andri Setiyawan<sup>1</sup>

No.	Perihal	Tanggal
1.	Bukti Konfirmasi Submit Artikel dan Artikel yang Disubmit	26 Januari 2023
2.	Bukti Konfirmasi Review dan Hasil Review Pertama	31 Januari 2023
3.	Bukti Revisi Pertama dan submit artikel Revisi	5 Februari 2023
4.	Bukti Konfirmasi Artikel Accepted	5 Februari 2023
5.	Bukti Konfirmasi Camera Ready dimana sudah diproses oleh editor/editor assigned pada 14 Maret 2023 dan Copy editing pada 20 Maret 2023	23 Maret 2023

**1. Bukti Konfirmasi Submit Artikel  
dan Artikel yang Disubmit  
(26 Januari 2023)**

# 1. Bukti Konfirmasi Submit Artikel dan Artikel yang Disubmit (26 Januari 2023)

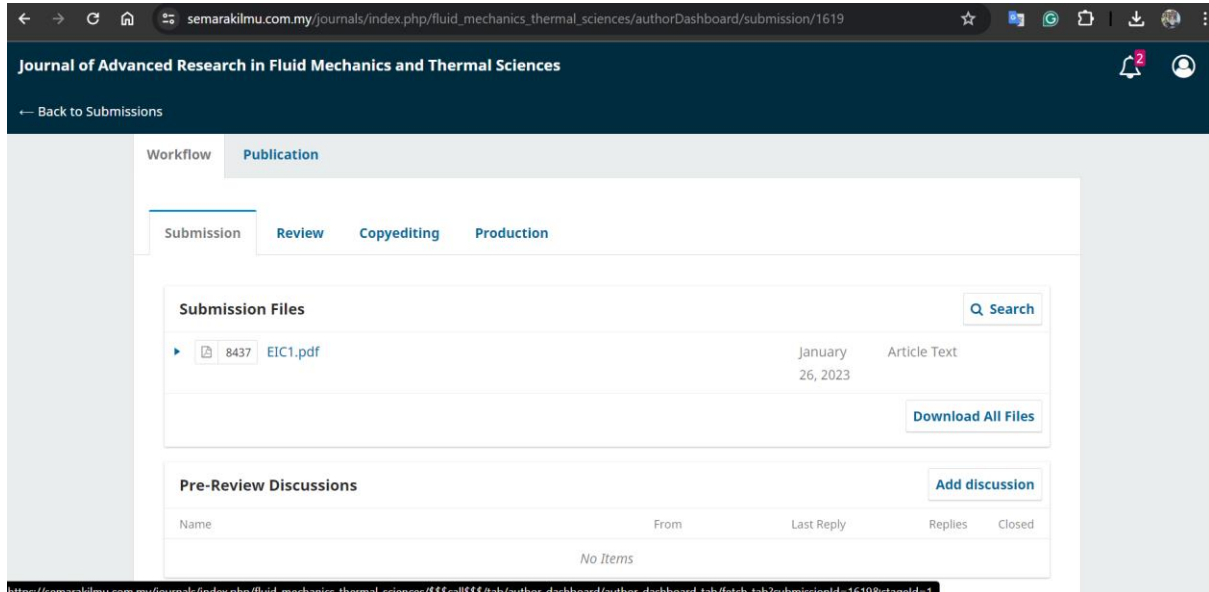

The screenshot shows the author dashboard for the 'Journal of Advanced Research in Fluid Mechanics and Thermal Sciences'. The page is titled 'Journal of Advanced Research in Fluid Mechanics and Thermal Sciences' and includes a navigation bar with 'Workflow' and 'Publication' tabs. Under 'Publication', there are sub-tabs for 'Submission', 'Review', 'Copyediting', and 'Production'. The 'Submission' tab is active, displaying a table of 'Submission Files'. One file is listed: '8437 EIC1.pdf', submitted on 'January 26, 2023', with the file type 'Article Text'. A 'Download All Files' button is visible. Below the file list is a 'Pre-Review Discussions' section with an 'Add discussion' button. The table for discussions is currently empty, showing 'No Items'. The browser's address bar shows the URL: 'https://semarakilmu.com.my/journals/index.php/fluid\_mechanics\_thermal\_sciences/authorDashboard/submission/1619'.

Name	From	Last Reply	Replies	Closed
No Items				

**2. Bukti Konfirmasi Review dan  
Hasil Review Pertama  
(31 Januari 2023)**

## 2. Bukti Konfirmasi Review dan Hasil Review Pertama (31 Januari 2023)

Tanggal : 2023-01-31 01:11 AM

Notifications

×

### [J. Adv. Res. Fluid Mech. Therm. Sc.] Editor Decision

2023-01-31 01:11 AM

Rizqi Fitri Naryanto:

We have reached a decision regarding your submission to Journal of Advanced Research in Fluid Mechanics and Thermal Sciences, "EIC22-The Effects of Exhaust Gas Emission of Alternative Fuel from The Mixing Between HDPE Plastic with Gasoline on Four-Stroke Engines".

#### Our decision is: Revisions Required

Please submit the revised article by 15 Feb 2023

#### Editorial Comments:

Please cite few articles from

<http://www.akademiabaru.com/submit/index.php/araset>

The screenshot shows the submission page for the Journal of Advanced Research in Fluid Mechanics and Thermal Sciences. The page header includes the journal name, a notification icon with a red '2', and a user profile icon. Below the header, there is a navigation bar with a 'Back to Submissions' link. The main content area displays the submission details for article 1619 by Rizqi Fitri Naryanto et al., titled 'The Effects of Alternative Fuel Mixture of HDPE Plastic and Gasoline on Four-Stroke Engine Exhaust'. The submission is associated with a 'Library' tag. The workflow is shown as a sequence of steps: Submission, Review, Copyediting, and Production. The current step is 'Round 1', which is highlighted. Below the workflow, the 'Round 1 Status' is displayed as 'Submission accepted'.

**Notifications**

<a href="#">[J. Adv. Res. Fluid Mech. Therm. Sc.] Editor Decision</a>	2023-01-31 01:11 AM
<a href="#">[J. Adv. Res. Fluid Mech. Therm. Sc.] Editor Decision</a>	2023-02-05 01:03 AM
<a href="#">[J. Adv. Res. Fluid Mech. Therm. Sc.] Editor Decision</a>	2023-03-23 05:08 AM

**Reviewer's Attachments**[Q Search](#)

No Files

**Revisions**[Q Search](#)[Upload File](#)

 8788	9. EIC-JOURNAL-RES-04022023.docx	February 4, 2023	Article Text
--	----------------------------------	------------------	--------------

**Our decision is: Revisions Required**

Please submit the revised article by 15 Feb 2023

**Editorial Comments:**

Please cite few articles from

<http://www.akademiabaru.com/submit/index.php/araset>

<http://www.akademiabaru.com/submit/index.php/progee>

Please proofread the whole article. Title and abstract should free from any english error.

The rest is ok

**3. Bukti Revisi Pertama dan submit artikel  
Revisi (5 Februari 2023)**

# 3. Bukti Revisi Pertama dan submit artikel Revisi (5 Februari 2023)

The screenshot shows the title page of a document in Microsoft Word. The title is "The Effects of Alternative Fuel Mixture of HDPE Plastic and Gasoline on Four-Stroke Engine Exhaust Gas Emissions". The authors are Rizqi Fitri Naryanto<sup>1</sup>, Kriswanto<sup>1</sup>, Fahmy Zuhda Bahtiar<sup>2</sup>, Mera Kartika Dellmayanti<sup>3</sup>, and Andri Setiyawan<sup>1</sup>. The affiliations are: <sup>1</sup>Department of Mechanical Engineering, Universitas Negeri Semarang, Gd E9 Kampus Sekaran Gunungpati, 50229 Semarang, Indonesia; <sup>2</sup>Automotive Technology Vocational Education, Universitas Ivet, Bendan Duvur-Gajabumngkur, Semarang, Indonesia; and <sup>3</sup>Department of Computer and Informatics Engineering, Politeknik Negeri Jakarta, 16425, Depok, Indonesia. The email address for Rizqi Fitri is rizqi\_fitri@mail.unnes.ac.id. The abstract discusses alternative fuels like pyrolyzed plastic waste and gasoline, comparing their properties and engine performance. Keywords include alternative fuels, pyrolysis, HDPE, engine speed, and exhaust gas emissions. Two revision comments are visible on the right side: "The title has been revised" and "Abstract has been revised".

The screenshot shows the introduction section of the document. The section is titled "1. Introduction". The text discusses alternative fuels, their advantages, and the environmental problems caused by plastic waste. It mentions that plastic waste can be used as an alternative fuel mixture, but this involves several processes like biodegradable plastic, burning waste, and pyrolysis. It also notes that HDPE (High-Density Polyethylene) plastic has a low density and produces more oil at a low temperature of 400°C. The text is numbered 1 through 13 on the left margin.



The use of plastic waste oil needs knowledge in the type of emission produced to ensure that it does not negatively influence human survival. Emission values exceeding the permissible threshold are very harmful to the environment. Hazardous gas emissions from the combustion process are hydrocarbon (HC) and carbon monoxide (CO) gas [7], [8]. A part from harming human health, increased vehicle volume, and air pollution influence natural conditions or global warming. Research on emission levels from plastic waste oil has not been widely conducted. This determines HDPE's effect as a mixture with gasoline fuel on the level of exhaust gas emissions. Experiments were performed under conditions C0 (100% pure premium), C10 (a mixture of 90% gasoline and 10% plastic oil), and C20 (a mixture of 80% gasoline and 20% plastic oil) with engine speeds of 1500, 2000 and 2500 rpm, by measuring carbon monoxide (CO) and hydro carbon (HC). Plastic waste was processed by pyrolysis to produce HDPE oil mixed with the gasoline to be used as fuel in research[9], [10].

## 2. Materials and Method

In this research, we had already conducted some steps using the materials on the methods. Plastics were used for executing the process mixed with the gasoline. Most plastic wastes exist in different classes of polymers, including high-density polyethylene (HDPE), low-density polyethylene (LDPE), polyvinyl chloride (PVC), polypropylene (PP), polystyrene (PS), and polyethylene terephthalate (PET).

### 2.1 Plastic Technology

Industrial plastics are more homogeneous and environmentally friendly, making them useful for down-cycling into lower-grade plastic products. Municipal plastics are more heterogeneous,

### 2.1 Plastic Technology

Industrial plastics are more homogeneous and environmentally friendly, making them useful for down-cycling into lower-grade plastic products. Municipal plastics are more heterogeneous, containing foreign substances. Approximately 10.675.1 wt% of Municipal waste contains plastics[11], [12]. Its waste mainly includes low-density polyethylene (LDPE), high-density polyethylene (HDPE), polyethylene terephthalate (PET), polypropylene (PP), polystyrene (PS), and poly (vinyl chloride) (PVC). About 50-70% of the total plastic waste is packaging materials from polyethylene, polypropylene, polystyrene, and polyvinyl chloride[9]. Averagely, polyethylene makes up the greatest fraction of all plastic wastes (69%)[11], and it comprises 63% of the total packaging waste[9].

Polyethylene (PE, low and high density) and polypropylene (PP) are the most widely used plastics[13]. HDPE is recyclable and can be discovered in plastic bottles, storage boxes, pipes and cable insulations, and many other applications. LDPE can manufacture computer parts, toys, soft bottles, wrappers, back sheets for diapers, and several additional applications. In the packaging industry, all three polymers, PP, PS, and PE, are widely use [5], [6]. A copolymer of ethylene and propylene is frequently utilized as a rubber and in computers [5]. Poly (vinyl chloride) (PVC) is another popular plastic suitable in many applications, such as plumbing pipes, electrical cable insulation, tubing, automobile seat covers, and rubber replacement. Poly (ethylene terephthalate) (PET) is a common polymer with many applications, including films, fibers, food containers, and beverage bottles [14].

### 2.2 Pyrolysis

This is the degradation of a material at high temperatures without oxygen by the thermochemical process. In plastic material, temperature between 300-500°C is required to form a gas condensed and distilled, producing oil and pulp in the form of char [15].

### 2.2 Pyrolysis

This is the degradation of a material at high temperatures without oxygen by the thermochemical process. In plastic material, temperature between 300-500°C is required to form a gas condensed and distilled, producing oil and pulp in the form of char [15].

Studies related to fuel production from plastic HDPE and LDPE have been widely conducted. Plastic pyrolysis oil increases the efficiency of 100 cc motors by 15-20% compared to gasoline.

The HDPE and LDPE oils have the same densities as gasoline and fuel, respectively. The pyrolysis

The HDPE and LDPE oils have the same densities as gasoline and fuel, respectively. The pyrolysis process at low temperatures requires a catalyst for efficient combustion [16]. The pyrolysis process had been conducted, as illustrated in Figure 1 (a) (b).

(a)

(b)

(a)

(b)

**Figure 1 (a) (b). Pyrolysis apparatus of plastic HDPE**

Description:

1. Pyrolysis reactor	6. Cooling water output
2. Thermometer	7. Condenser
3. Manometer	8. Cooling water input
4. Safety valve	9. Container
5. Faucet valve	

**2.3 Gasoline Fuels**

This is a clear, yellowish distilled fuel oil. The yellow color is due to the presence of additional dye. This fuel is widely used in internal combustion engines (ICE), especially for spark engines.

**2.3 Gasoline Fuels**

This is a clear, yellowish distilled fuel oil. The yellow color is due to the presence of additional dye. This fuel is widely used in internal combustion engines (ICE), especially for spark engines. The fuel quality has many effects on the combustion process. Therefore, the power generated is at maximum. A good fuel reduces knocking due to high pressure and temperature in the combustion chamber. These characteristics are called octane numbers in fuel.

The research was conducted using a mixture of plastic waste oil with fuels C0 (100% pure premium), C10 (a mixture of 90% gasoline and 10% plastic oil), and C20 (a mixture of 80% gasoline and 20% plastic oil). It was performed on 125 cc motorcycle vehicles based on the

specifications in [Table 1](#), with engine speed variations of 1500, 2000 and 2500 rpm.

**Table 1. Engine specification**

Variables	Dimension
Engine type	4 stroke SOHC
Diameter x stroke	52.4 mm x 57.9 mm
Cylinder volume	125 cc
Maximum Power	9.3 PS/7500 rpm
Maximum Torque	1.03 kgf.m/400 rpm
Compression comparison	9.0; 1
Clutch type	Automatic, centrifugal
Lubrication System	Wet
Cooling System	Air Cooling System
Fuel system	Carburetor
Transmission Type	Rotary, 4 speed
Ignition system	DC - CDI
Working Engine temperature	70°C - 80°C
Engine type	4 stroke SOHC

**3. Result and Discussion**

This research uses High-Density PolyEthylene (HDPE) plastic oil processed by pyrolysis as a gasoline fuel mixture. This was meant to produce HDPE oil that is mixed with gasoline fuel [17]. The plastic waste oil from the process is tested in a laboratory with the results shown in [Table 2](#).

**3. Result and Discussion**

This research uses High-Density PolyEthylene (HDPE) plastic oil processed by pyrolysis as a gasoline fuel mixture. This was meant to produce HDPE oil that is mixed with gasoline fuel [17]. The plastic waste oil from the process is tested in a laboratory with the results shown in [Table 2](#).

**Table 2. Laboratory test results of HDPE plastic oil**

No	Test Type	Unit	Test Result
1.	Research Octane Number (RON)		72.1
2.	Motor Octane Number (MON)		55.4
3.	(RON+MON)/2		63.8
4.	Flashpoint	(°C)	36

Based on laboratory test data, HDPE plastic oil has an octane number of 63.8, while gasoline fuel oil has an 88. The plastic oil has a heat value of 45,594 J/g, and a flashpoint of 36°C, while gasoline has a -43°C. The mixing of HDPE and gasoline petrol fuel is performed with the following composition as shown in [Figure 2](#).

**3.1. C10 mixture (90% gasoline and 10% HDPE plastic oil)**

The mixture of gasoline fuel and HDPE plastic oil is 90% and 10% with a volume of 450 ml gasoline and 50 ml plastic oil, respectively. The laboratory results are shown in [Table 3](#). In the C10 mixture variation, the octane value increased by 85.4 from the HDPE plastic waste oil mixture of 63.8. Flashpoint on this variation is 34°C decreased from the mixture of HDPE plastic waste oil and 36°C gasoline.

**Table 3. Laboratory test results of C10 fuel (90% gasoline and 10% plastic waste oil)**

No	Test Type	Unit	Test Result
1	Research Octane Number (RON)		89.1
2	Motor Octane Number (MON)		81.7
3	(RON+MON)/2		85.4
4	Flashpoint	(°C)	34

**3.2. C20 mixture (80% gasoline and 20% HDPE plastic oil).**

A mixture of gasoline fuel and HDPE plastic oil is a percentage of 80% and 20%, respectively, with a volume of 400 ml gasoline and 100 ml plastic oil. The laboratory results are shown in [Table 4](#).

**Table 4. Laboratory test results of C20 fuel (80% gasoline and 20% HDPE plastic oil)**

No	Test Type	Unit	Test Result
1	Research Octane Number (RON)		83.5
2	Motor Octane Number (MON)		89.5
3	(RON+MON)/2		86.5
4	Flashpoint	(°C)	35.5

File Home **Insert** Draw Design Layout References Mailings Review View Zotero Help

Cover Page Table Pictures Shapes SmartArt Online Videos Link Comment Header Footer Page Number Text Equation Symbol




Figure 2. Pure HDPE plastic oil, Pure Premium gasoline, C10 Mixture, C20 Mixture

Table 5. CO Exhaust Gas Emissions from C0, C10, C20 fuel mixtures

Speed (Rpm)	Trial	CO levels (%)		
		Pure Gasoline (Premium) C0	A Mixture of Pure Gasoline (Premium) C10 C20	
1500	1	3.914	0.175	0.193
	2	3.136	0.123	0.192
	Average	3.525	0.149	0.1925
2000	1	2.162	0.277	0.286
	2	2.203	0.183	0.266
	Average	2.1825	0.23	0.276
2500	1	1.699	0.232	0.273
	2	1.673	0.212	0.319
	Average	1.686	0.222	0.296

File Home **Insert** Draw Design Layout References Mailings Review View Zotero Help

Cover Page Table Pictures Shapes SmartArt Online Videos Link Comment Header Footer Page Number Text Equation Symbol

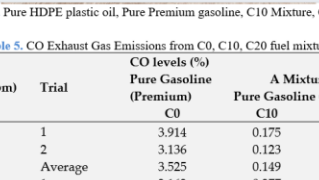


Figure 2. Pure HDPE plastic oil, Pure Premium gasoline, C10 Mixture, C20 Mixture

Table 5. CO Exhaust Gas Emissions from C0, C10, C20 fuel mixtures

Speed (Rpm)	Trial	CO levels (%)		
		Pure Gasoline (Premium) C0	A Mixture of Pure Gasoline (Premium) C10 C20	
1500	1	3.914	0.175	0.193
	2	3.136	0.123	0.192
	Average	3.525	0.149	0.1925
2000	1	2.162	0.277	0.286
	2	2.203	0.183	0.266
	Average	2.1825	0.23	0.276
2500	1	1.699	0.232	0.273
	2	1.673	0.212	0.319
	Average	1.686	0.222	0.296

File Home **Insert** Draw Design Layout References Mailings Review View Zotero Help

Cover Page Table Pictures Shapes SmartArt Online Videos Link Comment Header Footer Page Number Text Equation Symbol

More details can be seen in the graph below

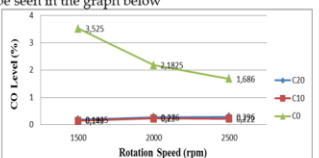


Figure 3. A graph illustrating the CO gas emission levels on the variations in C0, C10, C20 fuel mixtures

According to Figure 3 and Table 5, in pure gasoline premium type (C0), the exhaust gas emission level decreases according to the engine speed. However, it is different from the fuel mixtures (C10, C20), which undergo an increase in CO levels at an engine speed of 1500-2500 rpm.

Table 6. The results of HC exhaust gas emissions from C0, C10, C20 fuel mixtures

Speed (Rpm)	Trial	HC levels (ppm)		
		Pure Gasoline (Premium) C0	A mixture of gasoline and HDPE plastic oils C10 C20	
1500	1	700	2864	3766
	2	507	2997	3965

According to Figure 3 and Table 5, in pure gasoline premium type (C0), the exhaust gas emission level decreases according to the engine speed. However, it is different from the fuel mixtures (C10, C20), which undergo an increase in CO levels at an engine speed of 1500-2500 rpm.

Table 6. The results of HC exhaust gas emissions from C0, C10, C20 fuel mixtures

Speed (Rpm)	Trial	HC levels (ppm)		
		Pure Gasoline (Premium) C0	C10	A mixture of gasoline and HDPE plastic oils C20
1500	1	700	2864	3766
	2	507	2997	3965
	Average	603.5	2930.5	3865.5
2000	1	171	2558	3244
	2	243	2910	2231
	Average	207	2734	2737.5
2500	1	259	2239	3569
	2	207	1964	2064
	Average	233	2101.5	2816.5

More details can be seen in the graph below.



More details can be seen in the graph below.




Figure 4. A graph illustrating the HC gas emission levels on the variations in C<sub>0</sub>, C<sub>10</sub>, C<sub>20</sub> fuel mixtures

Figure 4 and Table 6 shown that in all variations of the fuel mixture (C<sub>0</sub>, C<sub>10</sub>, C<sub>20</sub>), the level of HC exhaust gas emissions decreases based on the engine speed. An increase in engine speed reduces the

level of HC gas emissions at a stationary rotation [18], [19]. In this case, the engine rotation speed is 1500-2500 rpm.

Table 7. Analysis of plastic waste oil characteristics and mixture variations

No	Variations	Octane Number (RON)	Flashpoint (°C)
1	HDPE Plastic Waste Oil	72.1	36
2	C <sub>10</sub>	89.1	34
3	C <sub>20</sub>	83.5	35.5

According to Table 7, there are differences in the octane numbers in HDPE plastic oils and mixtures C<sub>10</sub> and C<sub>20</sub>. The higher the percentage of used plastic oil, the lower the octane number. The low octane value has an impact on knocking. A collision between an explosion of fuel mixture (before a flame) and the fuel ignited by the spark plug, causing a sound, is known as knocking. Furthermore, there is a flashpoint variable. This is the lowest temperature at which the oil vapor or fuel in the mixture with the air ignites when subjected to a flame test (ignition) under certain conditions. The high flashpoint on fuel affects the resistance to ignition. The higher the proportion from used plastic oil, the higher the flashpoint.

Table 8. Analysis of HC and CO exhaust emission levels

No	Variations	1500 rpm		2000 rpm		2500 rpm	
		HC(ppm)	CO(%)	HC(ppm)	CO(%)	HC(ppm)	CO(%)
1	C0	603.5	3.525	207	2.1825	233	1.686

File Home Insert Draw Design Layout References Mailings Review View Zotero Help

Comments Editing Share

Cover Page Blank Page Page Break Tables Pictures Icons 3D Models SmartArt Chart Online Videos Cross-reference Comment Header Footer Page Number Header & Footer Text Text Symbols

Table 8. Analysis of HC and CO exhaust emission levels

No	Variations	1500 rpm		2000 rpm		2500 rpm	
		HC(ppm)	CO(%)	HC(ppm)	CO(%)	HC(ppm)	CO(%)
1	C0	603.5	3.525	207	2.1825	233	1.686
2	C10	2930.5	0.149	2734	0.23	2101.5	0.222
3	C20	3865.5	0.1925	2737.5	0.276	2816.5	0.296

Based on the results of exhaust gas emissions in Table 8, the highest levels of exhaust emissions in a row are in the specimen with a mixture of 20% plastic waste oil compared to a mixture of other percentages. For 20% fuel, exhaust gas emissions are lowest compared to 10% pure or unmixed fuel. This is due to detonation where the fuel burns without any ignition. It is caused by high temperature in the space, exceeding the flashpoint and the fuel crust sticking to the cylinder wall. The attached crusts burn during the work cycle of the vehicle, causing the knocking.

The high heat generated in the fuel after combustion increases the combustion chamber temperature. Furthermore, this affects the temperature of the air entering the cylinder. The higher of the air temperature, the denser of the molecules. The air molecules density increases the amount of air drawn by the piston into the combustion chamber, making the mixture to become lean condition. This reduces HC gas emission levels. A lean condition causes the length of fire to burn the fuel mixture with air, increasing the combustion rate than the piston speed. However, it does not apply to CO in fuel mixture with plastic oil.

At an engine speed of 1500 rpm, the HC gas emission in each research has the highest level than 2000 and 2500 rpm. This is because the throttle valve is fully closed, and therefore the air entering the combustion chamber due to piston suction is less than the fuel.

File Home Insert Draw Design Layout References Mailings Review View Zotero Help

Comments Editing Share

Cover Page Blank Page Page Break Tables Pictures Icons 3D Models SmartArt Chart Online Videos Cross-reference Comment Header Footer Page Number Header & Footer Text Text Symbols

### 3. Conclusions

This research involved producing gasoline of C0, C10, and C20 fuel mixes with engine speed variations of 1500, 2000, and 2500 rpm. The results show a decrease in the HC and CO exhaust gas emission levels at pure gasoline (C0), with an increase in the engine speed. Also, the HDPE mixture (C10, C20) experienced a decrease in HC levels and an increase in CO in the engine speed. This shows that HDPE mixed fuel is environmentally less friendly compared to pure premium.

File Home Insert Draw Design Layout References Mailings Review View Zotero Help



Comments Editing Share

Cover Page Blank Page Page Break Tables Pictures Icons 3D Models SmartArt Chart Online Videos Cross-reference Comment Header Footer Page Number Header & Footer Text Text Symbols

### References

- [1] A. K. Panda, R. K. Singh, and D. K. Mishra, "Thermolysis of waste plastics to liquid fuel/A suitable method for plastic waste management and manufacture of value added products—A world prospective," *Renewable and Sustainable Energy Reviews*, vol. 14, no. 1, pp. 233–248, Jan. 2010, doi: 10.1016/j.rser.2009.07.005.
- [2] R. D and E. Balasubramanian, "Effects of heat energy on morphology and properties of selective inhibition sintered high density polyethylene," *Journal of Mechanical Engineering and Sciences*, vol. 13, no. 1, Art. no. 1, Mar. 2019, doi: 10.15282/jmes.13.1.2019.05.0375.
- [3] R. F. Naryanto, H. Enomoto, N. Hieda, Y. Teraoka, C. Chunti, and R. Noda, "The Influence of Wood Pellet Feedstock Water Content on Tar Component in Biomass System Using Downdraft Gasifier," *J. Jpn. Inst. Energy*, vol. 98, no. 5, pp. 115–118, May 2019, doi: 10.3775/jie.98.115.
- [4] R. F. Naryanto *et al.*, "The Effect of Moisture Content on the Tar Characteristic of Wood Pellet Feedstock in a Downdraft Gasifier," *Applied Sciences*, vol. 10, no. 8, p. 2760, Apr. 2020, doi: 10.3390/app10082760.
- [5] N. Miskolczi, L. Bartha, G. Deák, and B. Jöver, "Thermal degradation of municipal plastic waste for production of fuel-like hydrocarbons," *Polymer Degradation and Stability*, vol. 86, no. 2, pp. 357–366, 2004, doi: 10.1016/j.polydegstab.2004.04.025.
- [6] N. Miskolczi, L. Bartha, and G. Deák, "Thermal degradation of polyethylene and polystyrene from the packaging industry over different catalysts into fuel-like feed stocks," *Polymer Degradation and Stability*, vol. 91, no. 3, pp. 517–526, 2006, doi: 10.1016/j.polydegstab.2005.01.056.
- [7] R. F. Naryanto, H. Enomoto, V. C. Anh, K. Fukadu, S. Iwai, and R. Noda, "Investigation of producer gas biomass gasification on reciprocated internal combustion engine," *IOP Conf. Ser.: Earth Environ. Sci.*, vol. 460, p. 012016, Apr. 2020, doi: 10.1088/1755-1315/460/1/012016.
- [8] A. Damayanti, R. Musfiroh, and N. Andayani, "The Effect of Tapioca Flour Adhesives to the Biopellet Characteristics of Rice Husk Waste as Renewable Energy," *IOP Conf. Ser.: Earth Environ. Sci.*, vol. 700, no. 1, p. 012028, Mar. 2021, doi: 10.1088/1755-1315/700/1/012028.
- [9] D. S. Scott, S. R. Czernik, J. Piskorz, and D. S. A. G. Radlein, "Fast Pyrolysis of Plastic Wastes," *Energy and Fuels*, vol. 4, no. 4, pp. 407–411, 1990, doi: 10.1021/ef00022a013.
- [10] H. Lubis, "Renewable Energy of Rice Husk for Reducing Fossil Energy in Indonesia," vol. 11, no. 1, 2018.
- [11] C. Zhou, W. Fang, W. Xu, A. Cao, and R. Wang, "Characteristics and the recovery potential of plastic

User  
New References from <http://www.akademiabaru.com/submit/index.php/araset>  
Another comment is in progress

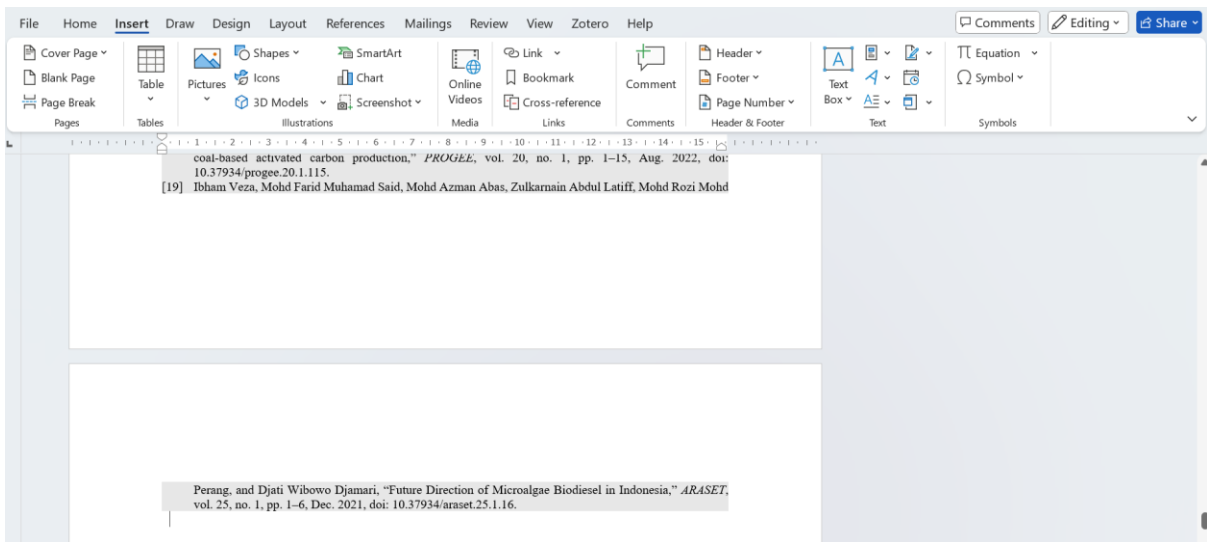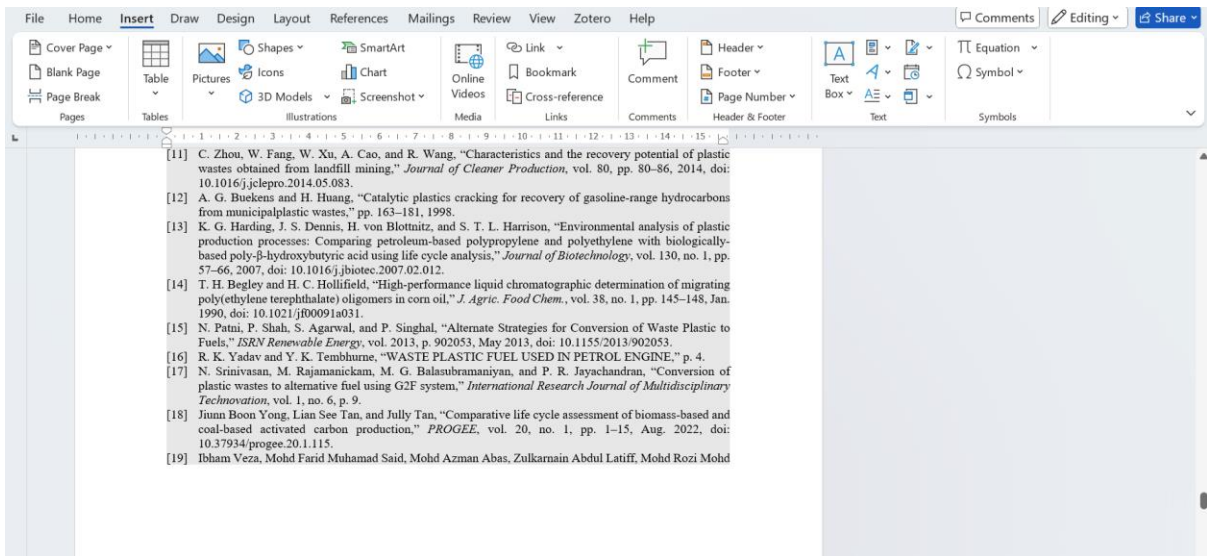

Tanggal: 2023-02-05 01:03 AM

**4. Bukti Konfirmasi Artikel Accepted  
(5 Februari 2023)**



# 4. Bukti Konfirmasi Artikel Accepted (5 Februari 2023)

Notifications

×

## [J. Adv. Res. Fluid Mech. Therm. Sc.] Editor Decision

2023-02-05 01:03 AM

Rizqi Fitri Naryanto:

We have reached a decision regarding your submission to Journal of Advanced Research in Fluid Mechanics and Thermal Sciences, "EIC22-The Effects of Exhaust Gas Emission of Alternative Fuel from The Mixing Between HDPE Plastic with Gasoline on Four-Stroke Engines".



Our decision is to: Accept Submission

Please make payment of Article Processing Charge of USD250 (International Corresponding Author) or RM1500 (Malaysian Corresponding Author).

The payment can be accomplished through

1) Bank in, Bank transfer or Telegraphic transfer to the following details:

Beneficiary: SEMARAK ILMU PUBLISHING

Bank's Name: CIMB BANK

Account number: 8604899129

1) Bank in, Bank transfer or Telegraphic transfer to the following details:

Beneficiary: SEMARAK ILMU PUBLISHING

Bank's Name: CIMB BANK

Account number: 8604899129

Swift code: CIBBMYKLXXX

Full Address: No 67, Jalan 8/1, Section 8, 43650 Bandar Baru Bangi, Selangor, Malaysia

Beneficiary Address: No 22, Jalan Puteri 5A/3, Bandar Puteri Bangi, 43000 Kajang, Selangor, Malaysia

OR

2) Payment by ConfBay Online Payment Gateway (Credit card/paypal, etc):

Register and upload the accepted paper here

<https://submit.confbay.com/conf/arfmts>

You will receive an invoice and guide for making online payment

Please email the proof of payment to [finance@akademiabaru.com](mailto:finance@akademiabaru.com) before we can begin copyediting of the accepted article.

Thank you

Truly

Editor-in-chief, Journal of Advanced Research in Fluid Mechanics and Thermal Sciences

**5. Bukti Konfirmasi Camera Ready  
(23 Maret 2023) dimana sudah diproses  
oleh editor/editor assigned pada 14 Maret  
2023 dan Copy editing pada 20 Maret 2023**

# **5. Bukti Konfirmasi Camera Ready (23 Maret 2023) dimana sudah diproses oleh editor/editor assigned pada 14 Maret 2023 dan Copy editing pada 20 Maret 2023**

Tanggal : 2023-03-23 05:08 AM

## **[J. Adv. Res. Fluid Mech. Therm. Sc.] Editor Decision**

2023-03-23 05:08 AM

Rizqi Fitri Naryanto:

The editing of your submission, "EIC22-The Effects of Exhaust Gas Emission of Alternative Fuel from The Mixing Between HDPE Plastic with Gasoline on Four-Stroke Engines," is complete. We are now sending it to production. Kindly find the copyedited manuscript under the copyediting tab for your perusal.

In addition, please provide the email address of all authors.

Thank you

Submission URL:



[https://semarakilmu.com.my/journals/index.php/fluid\\_mechanics\\_thermal\\_sciences/authorDashboard/submission/](https://semarakilmu.com.my/journals/index.php/fluid_mechanics_thermal_sciences/authorDashboard/submission/)

---

[Journal of Advanced Research in Fluid Mechanics and Thermal Sciences](#)

## Copyediting Discussions

[Add discussion](#)

Name	From	Last Reply	Replies	Closed
<a href="#">Copy editor has been assigned</a>	chieftechnicaleditor 2023-03-14 10:11 AM	-	0	<input type="checkbox"/>
<a href="#">Copyediting Initiated</a>	ahmadulwan 2023-03-20 09:52 AM	-	0	<input type="checkbox"/>

**Copy editor has been assigned****Participants**

Chief Technical Editor (chieftechnicaleditor)

Ahmad 'Ulwan (ahmadulwan)

Rizqi Fitri Naryanto (rizqifitrinaryanto)

**Messages**

Note	From
Dear author,  Your manuscript has been assigned for a copy-editing process which will be finished approximately in 3 weeks.  Thank you	chieftechnicaleditor 2023-03-14 10:11 AM

[Add Message](#)

Journal of Advanced Research

Back to Submissions

**Copyediting Initiated** ✕

**Participants**

Chief Technical Editor (chieftechnicaleditor)  
 Ahmad 'Ulwan (ahmadulwan)  
 Rizqi Fitri Naryanto (rizqifitrinaryanto)

**Messages**

Note	From
Dear author, Your paper has been initiated for copyediting process. Thank you.	ahmadulwan 2023-03-20 09:52 AM

[Add Message](#)

Journal of Advanced Research in Fluid Mechanics and Thermal Sciences

← Back to Submissions

1619 / Rizqi Fitri Naryanto et al. / The Effects of Alternative Fuel Mixture of HDPE Plastic and Gasoline on Four-Stroke Engine Exhaust [Library](#)

**Workflow** **Publication**

[Submission](#) [Review](#) [Copyediting](#) [Production](#)

**Production Discussions** [Add discussion](#)

Name	From	Last Reply	Replies	Closed
No Items				